

### High temperature series: up to 1500 °C

Reference	Type of assembly	Thermocouple: number and type	Length of sheath
L608000-001	H	K	600 mm
L608000-002	H	K	1000 mm
L608000-003	H	S	600 mm
L608000-004	H	S	1000 mm
L609000-001	J	S	600 mm
L609000-002	J	S	1000 mm
L609000-003	J	2 x S	600 mm
L609000-004	J	2 x S	1000 mm

Type H: ceramic 610 sheath (for K-type TC) or in alumina 710 (for S-type TC)

Type J: ceramic 530 sheath with a double-insulated interior sheath in alumina 710

### Sheathed thermocouples

These thermocouples (J and K types) are fabricated in accordance to the NF-EN 61-615 standard.

Usable up to 600 °C with a sheath in stainless steel 304L and up to 1150 °C with a 6mm diameter sheath in inconel 600.

#### Type TCG3: stainless steel or inconel sheathed, PVC extension cable output

Reference	Type of TC	Type of sheath	Diameter of sheath	Length of sheath	Cable length
L220322-524	J	Stainless steel 304L	1 mm	1000 mm	2 m
L220323-507	J	Stainless steel 304L	1.5 mm	150 mm	2 m
L220323-714	J	Stainless steel 304L	1.5 mm	500 mm	4 m
L220323-524	J	Stainless steel 304L	1.5 mm	1000 mm	2 m
L220325-509	J	Stainless steel 304L	3 mm	250 mm	2 m
L220325-514	J	Stainless steel 304L	3 mm	500 mm	2 m
L220325-524	J	Stainless steel 304L	3 mm	1000 mm	2 m
L220352-514	K	Inconel 600	1 mm	500 mm	2 m
L220354-514	K	Inconel 600	2 mm	500 mm	2 m
L220354-524	K	Inconel 600	2 mm	1000 mm	2 m
L220355-509	K	Inconel 600	3 mm	250 mm	2 m
L220355-714	K	Inconel 600	3 mm	500 mm	4 m
L220355-524	K	Inconel 600	3 mm	1000 mm	2 m
L220355-534	K	Inconel 600	3 mm	2000 mm	2 m

#### Type TCG6: sheathed in stainless steel or inconel, standard male connector output


Reference	Type of TC	Type of sheath	Diameter of sheath	Length of sheath
L220624-024	J	Inox 304L	2 mm	1000 mm
L220625-014	J	Inox 304L	3 mm	500 mm
L220625-034	J	Inox 304L	3 mm	2000 mm
L220652-014	K	Inconel 600	1 mm	500 mm
L220654-010	K	Inconel 600	2 mm	300 mm
L220654-024	K	Inconel 600	2 mm	1000 mm
L220654-034	K	Inconel 600	2 mm	2000 mm
L220654-038	K	Inconel 600	2 mm	3000 mm
L220655-009	K	Inconel 600	3 mm	250 mm
L220655-014	K	Inconel 600	3 mm	500 mm
L220655-024	K	Inconel 600	3 mm	1000 mm
L220655-034	K	Inconel 600	3 mm	2000 mm
L220655-038	K	Inconel 600	3 mm	3000 mm
L220657-024	K	Inconel 600	6 mm	1000 mm
L220657-029	K	Inconel 600	6 mm	1500 mm

#### Extension pieces for TCG6: PVC cable with standard female connector

Reference	Type	Length
L225602-020	J	2 m
L225603-020	K	2 m

**Type TCG7: sheathed in stainless steel or inconel, PM connection head output**

Reference	Type of TC	Type of sheath	Diameter of sheath	Length of sheath
L220727-014	J	Stainless steel 304L	6 mm	500 mm
L220757-014	K	Stainless steel 304L	6 mm	500 mm

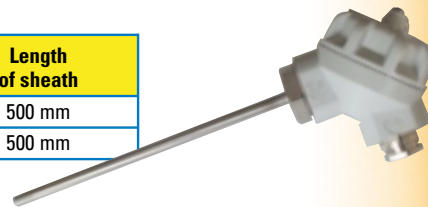

**Type TCG11: sheathed in stainless steel or inconel, miniature male connector output**

Reference	Type of TC	Type of sheath	Diameter of sheath	Length of sheath
L221122-009	J	Stainless steel 304L	1 mm	250 mm
L221123-014	J	Stainless steel 304L	1.5 mm	500 mm
L221123-024	J	Stainless steel 304L	1.5 mm	1000 mm
L221152-009	K	Inconel 600	1 mm	250 mm
L221152-016	K	Inconel 600	1 mm	600 mm
L221152-024	K	Inconel 600	1 mm	1000 mm
L221152-034	K	Inconel 600	1 mm	2000 mm
L221153-014	K	Inconel 600	1.5 mm	500 mm
L221153-024	K	Inconel 600	1.5 mm	1000 mm
L221153-038	K	Inconel 600	1.5 mm	3000 mm
L221154-020	K	Inconel 600	2 mm	800 mm
L221154-024	K	Inconel 600	2 mm	1000 mm



**Extension pieces for the TCG11: PVC cable with miniature female connector**

Reference	Type	Length
L225702-020	J	2 m
L225703-020	K	2 m

**Thermocouple sensors for general use**

These thermocouples (J and K types) are fabricated in accordance to the NF-EN 60-584 standard. They are protected with a sheath in stainless steel 316L and usable up to 400 °C.

Reference	Type of TC	Diameter of sheath	Length of sheath	Hot junction	Cable length
L915165-001	J	3.2 mm	50 mm	grounded	1 m
P07.6028.08	J	5 mm	200 mm	grounded	2.5 m
P07.6028.09	J	5 mm	200 mm	grounded	5 m
P07.6028.18	J	5 mm	200 mm	insulated	2.5 m
P07.6028.19	J	5 mm	200 mm	insulated	5 m
P07.6028.35	J	6 mm	200 mm	grounded	2.5 m
P07.6028.36	J	6 mm	200 mm	insulated	2.5 m
P07.6028.37	J	6 mm	200 mm	grounded	5 m
P07.6028.38	J	6 mm	200 mm	insulated	5 m



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Board Mount Temperature Sensors](#) category:*

*Click to view products by [Pyro Controle](#) manufacturer:*

Other Similar products are found below :

[5962-8757102XA](#) [66F115](#) [MCP9808-EMS](#) [MCP98242T-BEMNY](#) [MCP9843T-BEMC](#) [EMC1063-1-ACZL-TR](#) [NCT218FCT2G](#)  
[O53GAB175A-160Y](#) [OH10/62,112](#) [3610085020002](#) [389049M9527](#) [TC622EAT](#) [TC6501P095VCTTR](#) [TC6501P105VCTTR](#)  
[TC6501P125VCTTR](#) [MCP9802A0T-M/OT](#) [MCP9803T-M/SN](#) [MCP9843-BEST](#) [TC6501P115VCTTR](#) [TC6502P065VCTTR](#)  
[ADM1023ARQZ-REEL](#) [ADM1024ARUZ-REEL](#) [ADM1032ARMZ-1RL](#) [AT30TS74-U1FMBB-T](#) [AT30TS74-U1FMAB-T](#) [AT30TS74-](#)  
[U1FMCB-T](#) [AT30TS74-U1FMDB-T](#) [ADT7483AARQZ-RL](#) [ADT7481ARMZ-REEL](#) [ADT7463ARQZ-REEL](#) [MCP98243T-BEMNY](#)  
[MCP98243T-BE/MC](#) [66L080-0226](#) [MAX31820MCR+T](#) [MAX1452CAEC8H](#) [DS1780E](#) [TMP05BKSZ-REEL7](#) [5962-8757103XA](#) [WTK-14-](#)  
[36/N](#) [E52-CA6D-N 4M](#) [MCP98244T-BEMNY](#) [MCP9802A5T-MOT](#) [MAX6581TG9A+T](#) [DS75S-C11+T&R](#) [S-58LM20A-I4T1U](#)  
[MAX6501UKP120+T](#) [MCP98243T-BE/ST](#) [AT30TS01-MAA5M-T](#) [NCT375DR2G](#) [DS18S20-SL+T&R](#)