





## POSITIVE LOCKING POLARITY HEADER

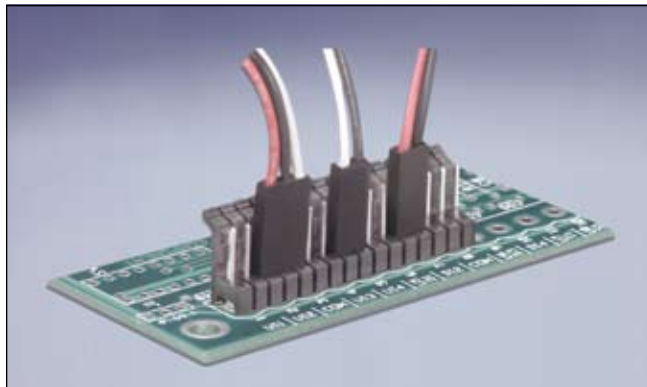

U.S. & Foreign Patents Issued and Pending

### ORDERING CODES



**PIN CONFIGURATION - 02 TO 28 CIRCUITS**

V = VERTICAL / # CIRCUITS

H = HORIZONTAL / # CIRCUITS


### SPECIFICATIONS

<b>MATERIAL</b>	Body	- Thermoplastic (black) U.L. 94 V2
	Pins	- Phosphor bronze .025" square tin plate
	Spacing	- Pins on .100" centers
	Header	- Mates with VCC locking header connector, or equivalent


### FEATURES

- Locking lever provides polarity integrity by restricting insertion of locking header in reverse.
- Lever clicks and locks preventing header connector from being retracted inadvertently.
- Locking header available in 2 to 28 pin positions, vertical or horizontal configuration.
- Designed for both vertical and horizontal mounting on the printed circuit board.
- Pins are .025" square brass, tin plated, located on .100" centers.
- Locking header mates with VCC locking header connectors or equivalent.


### OUTLINE DRAWINGS

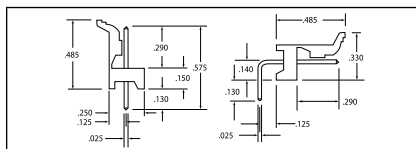


### HEADER LOCKING FEATURE

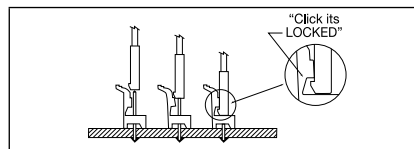

### PCB HOLE LAYOUT

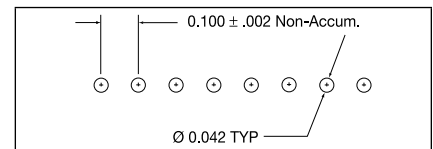

## HEADER CONNECTOR

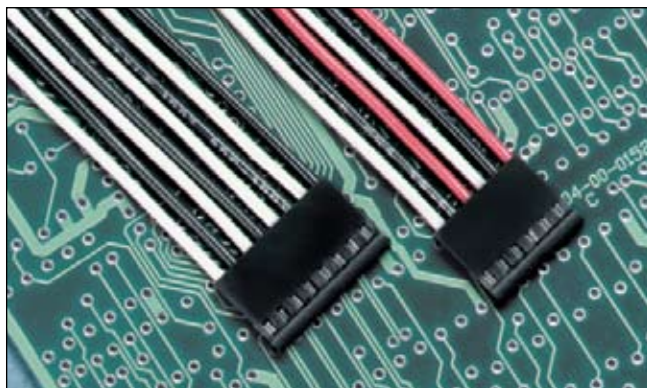

U.S. & Foreign Patents Issued and Pending

**ONLY AVAILABLE WITH WIRES  
CALL FOR ORDER INFORMATION**

### SPECIFICATIONS


<b>MATERIAL</b>	Header connector	- Thermoplastic (black) U.L. 94 V0
	Terminals	- Phosphor bronze, tin plated Rate 3 amp continuous service
	Wire	- 24 AWG, 7 strand copper, PVC insulated
<b>MOUNTING</b>	Non-locking plain header connector mates with any standard .025" square header on .100" centers. Locking header connectors mate with VCC positive locking header 450 series. Also mates with standard and friction header .025" pins on .100" centers.	

### FEATURES


- Header connector mates with VCC locking header CNX xxx, Molex 6373, 7478 friction header or equal.
- Header connectors 2, 3, 4, 6 and 8 position are end-to-end stackable.
- Header connectors with or without locking tab, rated U.L. 94 V0.
- Terminal's unique tri-finger design mates with pins from .017" round to .025" square.
- Terminals for use specifically with VCC header connectors.
- Terminals designed for use with wire rating 24 AWG 300V, 105°C.

### HEADER CONNECTORS

#### NON-LOCKING HEADER CONNECTOR



#### LOCKING HEADER CONNECTOR



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Headers & Wire Housings](#) category:*

*Click to view products by [Visual Communications](#) manufacturer:*

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [009176003701906](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#)