

# PCB - PTF 0,3/ 4-FLEX-L-10 - 1848516

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Accessories, Number of positions: 4, Pitch: 2.4 mm, Mounting: PCB connector



## Why buy this product

- Corner connection for implementing complex arrangements of flexible LED printed-circuit boards
- Easy connection of flexible LED printed-circuit boards
- Minimal heating during operation
- UL-approved materials



## Key Commercial Data

Packing unit	20 pc
Minimum order quantity	20 pc
GTIN	4 055626 282244
Weight per Piece (excluding packing)	0.25 g
Country of origin	Netherlands
Note	Made to Order (non-returnable)

## Technical data

Product type	PCB plug
Number of positions	4
Pitch	2.4 mm
Plug-in system	COMBICON COMPACT PTF
Product family	PTF 0,3/...-Flex

## Classifications

### eCl@ss

eCl@ss 5.1	27141190
eCl@ss 6.0	27260704

# PCB - PTF 0,3/ 4-FLEX-L-10 - 1848516

## Classifications

eCl@ss

eCl@ss 8.0	27440490
------------	----------

ETIM

ETIM 4.0	EC002643
ETIM 5.0	EC002637

## Accessories

### Additional products

Printed-circuit board connector - PTF 0,3/ 2-WB-10-H - 1707562



Plug component, Nominal current: 10 A, Rated voltage (III/2): 24 V, Number of positions: 2, Pitch: 2.4 mm, Color: white, Contact surface: Tin, Mounting: Direct plug-in method, Length of the punched-on cables: 500 mm, for flexible PCBs with a width of 10 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

Printed-circuit board connector - PTF 0,3/ 4-BB-10-H - 1707563



Plug component, Nominal current: 10 A, Rated voltage (III/2): 24 V, Number of positions: 4, Pitch: 2.4 mm, Color: white, Contact surface: Tin, Mounting: Direct plug-in method, for flexible PCBs with a width of 10 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

Printed-circuit board connector - PTF 0,3/ 4-WB-10-H - 1707565




Plug component, Nominal current: 10 A, Rated voltage (III/2): 24 V, Number of positions: 4, Pitch: 2.4 mm, Color: white, Contact surface: Tin, Mounting: Direct plug-in method, Length of the punched-on cables: 500 mm, for flexible PCBs with a width of 10 mm and a permissible PCB thickness in the contact zone of 0.15 mm ... 0.3 mm

## Drawings

## PCB - PTF 0,3/ 4-FLEX-L-10 - 1848516

Dimensional drawing

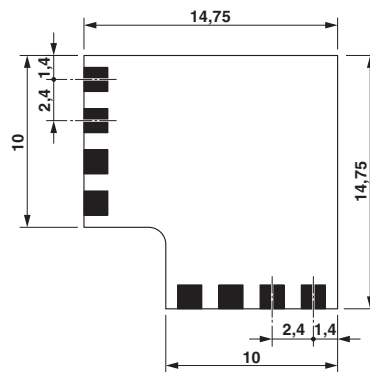

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [phoenix contact](#) manufacturer:*

Other Similar products are found below :

[1203259](#) [3240366](#) [1893300](#) [1623633](#) [2814605](#) [3240098](#) [0201391](#) [CRIMPFOX 16 S](#) [CRIMPSET 25](#) [7001438](#) [ETD-BL-1T-F-300S](#) [MCR-1CLP-I-I-00](#) [MCR-4CLP-I-I-00](#) [MCR-DAC 8-I- 4-BUS](#) [FL EPA WMS](#) [FLK 50/EZ-DR/ 400/KONFEK/S](#) [FLS PB M12 DO 8 M12-2A](#) [PPS CD BLADE](#) [PSI-MOS-DNET CAN/FO 660/BM](#) [PSM-ME-RS232/RS232-P](#) [PSM PTK-4](#) [PSM-SET-FSMA/4-KT](#) [PSR-SCP-24DC/TS/SDI8/SDIO](#) [PSR-SCP- 24DC/URD3/4X1/2X2](#) [PT 2X2- 5DC-ST](#) [1202580](#) [1203534](#) [1205985](#) [1206308](#) [1207420](#) [1209091](#) [QUINT-BAT/24DC/12AH](#) [1204038](#) [1212041](#) [1212096](#) [1212162](#) [1212171](#) [1212202](#) [1212250](#) [1212304](#) [1212380](#) [1212480](#) [1212485](#) [1212488](#) [1212500](#) [1212511](#) [1212578](#) [1212584](#) [1212585](#) [1212592](#)