

L754 MINIATURE CERAMIC FUSE LINKS





These size 00 (15.9mm x 4.7mm), sand filled fuse links have a high rupturing capacity and a category duty of 250V a.c. or 250V d.c. (Maximum prospective overload 4000A at 0.4pf and 250Va.c. and 230 V d.c. Time constant 0.004s.)

- MINIMUM LIFE:** 1,000 hours at rated current at temperatures up to 35°C. 1,000 hours continuous at 80% of rated current at temperatures beyond 35°C to 85°C.
- TEMPERATURE RANGE:** -60°C to +85°C
- MARKING:** Body marked with rating and approved versions carry the Joint Services' reference number
- WEIGHT:** 0.85g

ORDERING REFERENCE: L754/CURRENT RATING IN AMPERES

AVAILABLE IN : 50mA, 100mA, *250mA, *500mA, *1A, *2A
* Qualification Approved

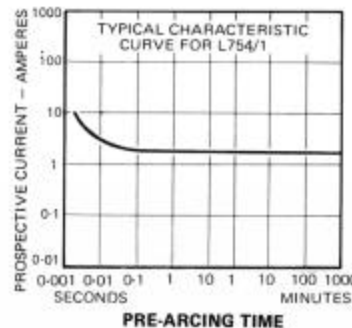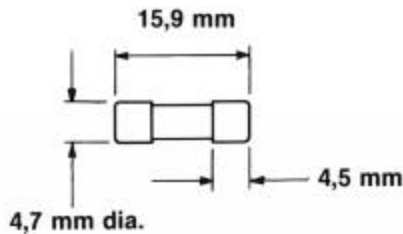

BLP reserve the right to change without prior notice the information contained within this leaflet

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [belling lee manufacturer](#):

Other Similar products are found below :

[123984R](#) [003846CM](#) [124104AM](#) [L1744A](#) [L2006A](#) [124054X](#) [124064G](#) [REF-H](#) [L2143/6/L](#) [L1349/FP](#) [L1350/NI](#) [L1904C/8/CS](#) [L1790A](#)
[L693/3](#) [L754/2](#) [003722EM](#) [124102EM](#) [L1792A](#) [REF-02](#) [SF2032-6/01](#) [L1317/BLACK](#) [L1382/H](#) [L2225](#) [L1318/BLACK](#) [L309/1/RED](#)
[L1904C/6/CS](#) [L1904A/6/FP](#) [Y9236](#) [L1904A/8/FS](#) [L1904A/8/FP](#) [L1904C/7/PCR](#) [L2224](#) [L1904C/4/CS](#) [L2180](#) [L1568/1/RED](#) [L1639B/NI](#)
[REF-06](#) [REF-11](#) [REF-F](#) [L1001/1/BLACK](#) [L1436A/P](#) [L1436B/S](#) [L1465/RPCS](#) [L1793A](#) [L1850/1/GREEN](#) [L1850/1/RED](#) [L1896A/GREEN](#)
[L1896A/RED](#) [L1904A/5A/FP](#) [L1904A/5/FP](#)