



# CAMBLOCK PLUS

PCB  
TERMINAL  
BLOCKS

## 5mm pitch Triple Decker Terminal Blocks

- Triple decker terminals
- Moulded in green UL94-V0 flame retardant PA66
- 1.5mm<sup>2</sup> (30-14AWG)
- Professional rising clamp terminals
- Guided pin alignment
-   approved


CTBPTDVG



### SPECIFICATION

Rating	15A/300V
Insulation resistance	500M $\Omega$ /500V
Withstand Voltage	AC2000V/1min
Contact Resistance	20m $\Omega$ (max)
Working Temperature	-40°C to 105+°C
Mouldings	UL94-V0 Flame retardant PA66
Pin/Terminal	Tin plated brass
Rising Clamp	Brass, nickel plated
Screw/Torque	M2.5 Steel, zinc plated 0.4Nm
Recommended PCB hole size	$\phi$ 1.5mm

TYPE NO.	POLES	LENGTH
CTBPTDVG/2	6	12.5mm
CTBPTDVG/3	9	17.5mm
CTBPTDVG/4	12	22.5mm
CTBPTDVG/5	15	27.5mm
CTBPTDVG/6	18	32.5mm
CTBPTDVG/7	21	37.5mm
CTBPTDVG/8	24	42.5mm
CTBPTDVG/9	27	47.5mm
CTBPTDVG/10	30	52.5mm
CTBPTDVG/11	33	57.5mm
CTBPTDVG/12	36	62.5mm

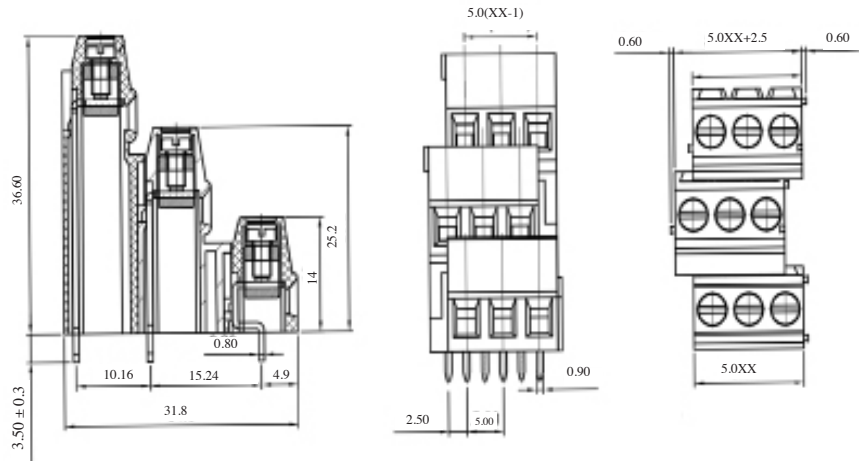

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [camden manufacturer](#):*

Other Similar products are found below :

[412689X](#) [CTBP92VE/12R](#) [CTBP9350/12](#) [IND515205-240-T/GRN](#) [IND515205-240-T/RD](#) [IND5032405-240-T/GRN](#) [CE10.00.EI](#)  
[C192SHAND](#) [CNMB/6ST/2](#) [CNMB/4ST/2](#) [CSACST004](#) [CTBP9200/9](#) [CIME/M/BE2250SS](#) [CHH64E1BL](#) [CIM/15W-DMFS](#) [CHHBAT2GY](#)  
[CFTBN/2](#) [CCB2S1/04](#) [CHDX6-221C](#) [CHDX8-224](#) [CHDASMP29](#) [CHDASMP34](#) [CHDX810DD](#) [CHDX811DD](#) [CCTTM40LR](#)  
[CTBP92VJ/5S](#) [CTBP92VJ/8R](#) [CTSN431/12/M](#) [CTSN433/12/M](#) [CUABOX006](#) [CE10.00.FM](#) [CBRPH-BLK](#) [BIM2003/13-WH/WH](#)  
[RX2008/S-5-WH](#) [CBARD-CAR](#) [CRDCG0007](#) [CNMB/4/KIT](#) [CTB5050/5](#) [CTBP92HE/11](#) [CTBP9358/10AO](#) [CHH66C2GY](#) [CHH456PBK](#)  
[CHH451ABK](#) [CIM/9W-DMFS](#) [CIM/25W-DMFS](#) [RTM5006/16-NC-BLK](#) [IND5032405-125-T/AMB](#) [CCB1S1/03](#) [CCD2S1/04](#) [CCE1S1/05](#)