

200 Series

Brown Devil® Vitreous Enamel Power



Ohmite's Brown Devil® is a small, exceptionally durable power resistor. It features all-welded construction and rugged, flame resistant conformal lead free vitreous enamel coating to ensure successful performance under high temperatures.

The wirewound 200 Series has a hollow-core construction, which accommodates rigid mounting with brackets or thru bolts.

Mounting brackets not included with resistors.

FEATURES

- Rugged lead free vitreous enamel coating
- All-welded construction.
- Self supporting terminal mounting option.
- Higher power ratings.
- Flame-resistant lead free vitreous enamel coating.
- RoHS compliant product available. Add "E" suffix to part number to specify.

SERIES SPECIFICATIONS

Series	Wattage	Ohms	Lead Gauge	Max. Voltage*
B5	5.25	0.1-20K	20	187
B8	8.0	0.03-25K	18	250
B12	12.0	0.08-51K	18	625
B20	20.0	0.1-100K	18	750

Non-Inductive versions available. Insert "N" before tolerance code.

Example: B5NJ10RE

Also available in low cost Centohm or Silicone coating. Consult Ohmite.

* Maximum Voltage is based on Ohm's Law $[V=\sqrt{P \cdot R}]$ as limited by the resistance value of specified product

CHARACTERISTICS

Coating	lead-free vitreous enamel
Core	Ceramic
Terminals	Tinned axial; RoHS solder composition is 96% Sn, 3.5% Ag, 0.5% Cu
Derating	Linearly from 100% @ +25°C to 0% @ +350°C
Tolerance	1Ω+: ±5% under 1Ω: ±10%
Power rating	Based on 25°C free air rating
Overload	10 times rated wattage for 5 seconds
Temperature coefficient	5Ω and under: ±400 ppm/°C Above 5Ω: ±260 ppm/°C
Max. amps	To calculate, use the formula $\sqrt{P/R}$


(continued)

200 Series

Brown Devil® Vitreous Enamel Power

DIMENSIONS

(in. / mm)

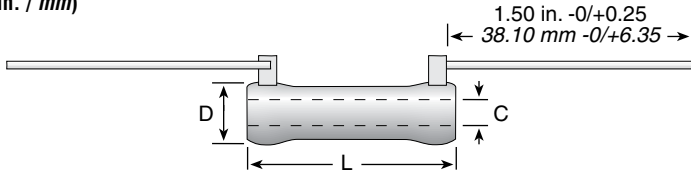

Series	Wattage	L	D	C	Lead Gauge
B5	5.25	0.625 / 15.88	0.250 / 6.35	0.135 / 3.43	20
B8	8.0	1.000 / 25.40	0.313 / 7.94	0.188 / 4.76	18
B12	12.0	1.750 / 44.45	0.313 / 7.94	0.188 / 4.76	18
B20	20.0	2.000 / 50.80	0.438 / 11.11	0.250 / 6.35	18

ORDERING INFORMATION

Standard Values

Ohmic value		Wattage				Ohmic value		Wattage				Ohmic value		Wattage				Ohmic value		Wattage														
Part No.	Prefix	Suffix	5.25	8	12	20	Part No.	Prefix	Suffix	5.25	8	12	20	Part No.	Prefix	Suffix	5.25	8	12	20	Part No.	Prefix	Suffix	5.25	8	12	20	Part No.	Prefix	Suffix	5.25	8	12	20
0.5	—	R50E					20	—	20RE					270	—	270E					2,250	—	2K25E					16,000	—	16KE				
1	—	1R0E					22	—	22RE					300	—	300E					2,400	—	2K4E					17,500	—	17K5E				
1.1	—	1R1E					24	—	24RE					330	—	330E					2,500	—	2K5E					18,000	—	18KE				
1.2	—	1R2E					25	—	25RE					350	—	350E					2,700	—	2K7E					20,000	—	20KE				
1.3	—	1R3E					27	—	27RE					360	—	360E					2,750	—	2K75E					22,500	—	22K5E				
1.5	—	1R5E					30	—	30RE					390	—	390E					3,000	—	3K0E					25,000	—	25KE				
1.6	—	1R6E					33	—	33RE					400	—	400E					3,300	—	3K3E					30,000	—	30KE				
1.8	—	1R8E					35	—	35RE					430	—	430E					3,500	—	3K5E					35,000	—	35KE				
2	—	2R0E					36	—	36RE					450	—	450E					3,600	—	3K6E					40,000	—	40KE				
2.2	—	2R2E					39	—	39RE					470	—	470E					3,900	—	3K9E					45,000	—	45KE				
2.4	—	2R4E					40	—	40RE					500	—	500E					4,000	—	4K0E					50,000	—	50KE				
2.7	—	2R7E					43	—	43RE					510	—	510E					4,300	—	4K3E					55,000	—	55KE				
3	—	3R0E					47	—	47RE					560	—	560E					4,500	—	4K5E					60,000	—	60KE				
3.3	—	3R3E					50	—	50RE					600	—	600E					4,700	—	4K7E					65,000	—	65KE				
3.6	—	3R6E					51	—	51RE					620	—	620E					5,000	—	5K0E					70,000	—	70KE				
3.9	—	3R9E					56	—	56RE					650	—	650E					5,100	—	5K1E					75,000	—	75KE				
4	—	4R0E					62	—	62RE					680	—	680E					5,600	—	5K6E					80,000	—	80KE				
4.3	—	4R3E					68	—	68RE					700	—	700E					6,000	—	6K0E					85,000	—	85KE				
4.7	—	4R7E					75	—	75RE					750	—	750E					6,200	—	6K2E					90,000	—	90KE				
5	—	5R0E					82	—	82RE					800	—	800E					6,800	—	6K8E					95,000	—	95KE				
5.1	—	5R1E					91	—	91RE					820	—	820E					7,000	—	7K0E					100,000	—	100KE				
5.6	—	5R6E					100	—	100E					900	—	900E					7,500	—	7K5E											
6.2	—	6R2E					110	—	110E					910	—	910E					8,000	—	8K0E											
6.8	—	6R8E					120	—	120E					1,000	—	1K0E					8,200	—	8K2E											
7.5	—	7R5E					125	—	125E					1,100	—	1K1E					8,500	—	8K5E											
8.2	—	8R2E					130	—	130E					1,200	—	1K2E					9,000	—	9K0E											
9.1	—	9R1E					150	—	150E					1,250	—	1K25E					9,100	—	9K1E											
10	—	10RE					160	—	160E					1,300	—	1K3E					10,000	—	10KE											
11	—	11RE					180	—	180E					1,500	—	1K5E					11,000	—	11KE											
12	—	12RE					200	—	200E					1,600	—	1K6E					12,000	—	12KE											
13	—	13RE					220	—	220E					1,750	—	1K75E					12,500	—	12K5E											
15	—	15RE					225	—	225E					1,800	—	1K8E					13,000	—	13KE											
16	—	16RE					240	—	240E					2,000	—	2K0E					13,500	—	13K5E											
18	—	18RE					250	—	250E					2,200	—	2K2E					15,000	—	15KE											

✓ = Standard values; check availability at www.ohmite.com

These values involve very fine resistance wire and should not be used in critical applications without burn-in and/or thermal cycling:

B5: 6.8K-20KΩ
 B8: 12.5K-25KΩ
 B12: 30K-51KΩ
 B20: 22.5K-100KΩ

Coating
 Blank = Vitreous
 C = Centohm
 S = Silicone

Non-Inductive Winding
 Optional (blank = std. winding)

RoHS Compliant

B 8 N J 5 R 0 E

Series

Tolerance
 F = 1%
 H = 3%
 J = 5%
 K = 10%

Ohms
 1R0 = 1Ω
 250 = 250Ω
 1K0 = 1,000Ω
 25K = 25,000Ω
 25K5 = 25,500Ω

Made-to-order Parts

Non-Inductive Winding
 Optional (blank = std. winding)

Core Diameter
 See "Core and Terminal Selection"

RoHS Compliant

2 0 0 N 8 D 5 R 0 0 0 J E

Coating
 200 = Vitreous
 400 = Silicone
 Ceramic

Wattage
 3
 5.25
 8
 12
 20

Ohms
 R500 = 0.500Ω
 1R00 = 1Ω
 250R = 250Ω
 1K00 = 1,000Ω
 25K0 = 25,000Ω
 25K5 = 25,500Ω

Tolerance
 F = 1%
 H = 3%
 J = 5%
 K = 10%

See website for custom core info