

# Fuse terminals

## TS 32 / KRG

When using ATEX certified components in hazardous area applications the installation instructions and the rated data for accessories in the technical appendix must be considered.

<b>Width/Length/Height with TS35x7.5</b>	mm
Max. current / max. cond. cross-section	A/mm <sup>2</sup>
Max. clamping range	mm <sup>2</sup>

### Technical data

Rated data	
Rated voltage for adjacent terminal	V
Rated current	A
Rated cross-section	mm <sup>2</sup>
Rated impulse voltage / Pollution severity	kV/-
Plug gauge IEC 60-947-1 / flammability class acc. UL 94 Approvals	

Clampable conductors (H05V/H07V)	
Solid / stranded	mm <sup>2</sup>
Flexible / flexible w. wire end ferrule	mm <sup>2</sup>
Tightening torque range (clamping screw)	Nm
Stripping length / blade size	mm / -

2 clampable conductors of equal cross-section	
Solid / stranded	mm <sup>2</sup>
Flexible / flexible w. wire end ferrule	mm <sup>2</sup>

Information

### Order data

Version	
	500V ac/dc
	400V ac/dc
	250V ac/dc
<b>with neon lamp</b>	230V ac/dc
	<b>with LED</b> 230V ac
	<b>with LED</b> 230V dc
<b>with neon lamp</b>	115V ac/dc
	<b>with LED</b> 115V ac
	<b>with LED</b> 115V dc
	<b>with LED</b> 60V ac
	<b>with LED</b> 60V dc
<b>mit lamp</b>	48V ac/dc
	<b>with LED</b> 48V ac
	<b>with LED</b> 48V dc
	<b>with LED</b> 24V ac
	<b>with LED</b> +- 24V dc
	<b>mit lamp</b> 24V ac/dc
	500V ac/dc

Information

### Accessories

Cross-connection	
	2-pole
	3-pole
	4-pole
(Q)	10-pole
<b>End plate / partition</b>	(behind last terminal)


Marking systems

For detailed information on other accessories and applications see "Accessories"

## SAKS 1 5x20

10 mm<sup>2</sup>



<b>13 x 54 x 61</b>	
<b>10 / 16</b>	
<b>0.13 ... 16</b>	

IEC	UL	CSA	EN 50019
500	300	600	
10	6.3	10	
10	AWG 22... 10	AWG 26... 10	
	6 / 3		
	B6 / 5VA		

Rated connection		Additional connection	
0.5...16	/ 1.5...10		
0.5...10	/ 0.5...10		
1.2...2.4 (M4)			
12 / 5.5 x 1.0			

Information

Type	Qty.	Order No.
SAKS 1/G20	20	0191220000

Type	Current [A]	Qty.	Order No.
QL 2 SAKS1	47	50	0191400000
QL 3 SAKS1	36	50	0191500000
QL 4 SAKS1	36	20	0191600000
QL 10 SAKS1	36	20	0338800000
<b>Width [mm]</b>			
AP SAKS1+3 KRG	3	20	0191320000


Marking systems
DEK 5


Cross connection accessories see chapter accessories

## SAKS 1 5x20

10 mm<sup>2</sup>

With LED or Neon Bulb

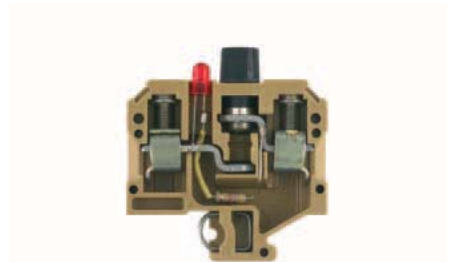

<b>13 x 54</b>	
<b>10 / 16</b>	
<b>0.5 ... 16</b>	

IEC	UL	CSA	EN 50019
500			
6.3			
10			
	4		
	B6 / 5VA		

Rated connection		Additional connection	
0.5...16	/ 1.5...10		
0.5...10	/ 0.5...10		
1.2...2.4 (M4)			
12 / 5.5 x 1.0			

Information

Type	Qty.	Order No.
SAKS 1/32 G20 GL 230VAC	10	0306120000
SAKS 1/32 G20 GL 115VAC	10	0385320000
SAKS 1/32 G20 LD 24VAC	10	1111220000
SAKS 1/32 G20 LD 24VDC	10	0371420000

Type	Current [A]	Qty.	Order No.
<b>Width [mm]</b>			
AP SAKS1+3 KRG	3	20	0191320000

Marking systems
DEK 5

Cross connection accessories see chapter accessories


# Fuse terminals

## SAKS 1 5x25

10 mm<sup>2</sup>



13 x 54 x 61  
10 / 16  
0.13 ... 16



IEC	UL	CSA	EN 50019
500	300	600	
10	6.3	10	
10	AWG 22... 10 AWG 26... 10		
6 / 3			
B6 / 5VA			



### Rated connection

0.5...16 / 1.5...10  
0.5...10 / 0.5...10  
1.2...2.4 (M4)  
12 / 5.5 x 1.0

Type	Qty.	Order No.
SAKS 1/G25	20	0191120000

Type	Current [A]	Qty.	Order No.
QL 2 SAKS1	47	50	0191400000
QL 3 SAKS1	36	50	0191500000
QL 4 SAKS1	36	20	0191600000
QL 10 SAKS1	36	20	0338800000
<b>Width [mm]</b>			
AP SAKS1+3 KRG	3	20	0191320000


DEK 5

Cross connection accessories see chapter accessories

## SAKS 1 5x25

10 mm<sup>2</sup>

With neon bulb



13 x 54  
6.3 / 16  
0.5 ... 16



IEC	UL	CSA	EN 50019
500			
6.3			
10			
4			
B6 / 5VA			



### Rated connection

0.5...16 / 1.5...10  
0.5...10 / 0.5...10  
1.2...2.4 (M4)  
12 / 5.5 x 1.0

Type	Qty.	Order No.
SAKS 1/32 G25 GL 230VAC	10	0309320000


Type	Current [A]	Qty.	Order No.
<b>Width [mm]</b>			
AP SAKS1+3 KRG	3	20	0191320000

DEK 5

Cross connection accessories see chapter accessories

## SAKS 3

10 mm<sup>2</sup>



13 x 54 x 61  
10 / 16  
0.33 ... 16



IEC	UL	CSA	EN 50019
500	300	600	
10	10	10	
10	AWG 22... 10 AWG 22... 10		
6 / 3			
B6 / 5VA			



### Rated connection

0.5...16 / 1.5...10  
0.5...10 / 0.5...10  
1.2...2.4 (M4)  
12 / 5.5 x 1.0

Type	Qty.	Order No.
SAKS 3 G/5X30 500V	20	0297520000

SAKS 3 GZ/6.3X32 20 0248920000  
SAKS 3 1"x1/4" with a red cap available under 0211120000.

Type	Current [A]	Qty.	Order No.
QL 2 SAKS1	47	50	0191400000
QL 3 SAKS1	36	50	0191500000
QL 4 SAKS1	36	20	0191600000
QL 10 SAKS1	36	20	0338800000
<b>Width [mm]</b>			
AP SAKS1+3 KRG	3	20	0191320000

DEK 5

Cross connection accessories see chapter accessories

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [weidmuller](#) manufacturer:*

Other Similar products are found below :

[56956](#) [0133660000](#) [68676](#) [69718](#) [EXO24CH](#) [7940000218](#) [8005181001](#) [8008180000](#) [8432240000](#) [8463580000](#) [8545830000](#) [8689870000](#)  
[8705640000](#) [9001080000](#) [9003720000](#) [9004250000](#) [9004780000](#) [9013260000](#) [9014100000](#) [9019040000](#) [9026010000](#) [9028630000](#) [903708](#)  
[9037350000](#) [9046290000](#) [9129643500](#) [913155](#) [919656](#) [919764](#) [9202230000](#) [9202850000](#) [9204260000](#) [9456750000](#) [9457913000](#) [980811](#)  
[980826](#) [9912800003](#) [9916080000](#) [9916280012](#) [9918380000](#) [9919371224](#) [9925710000](#) [9926252005](#) [9927480024](#) [1166660000](#) [11751](#)  
[1222550000](#) [ACT20X-2HDI-2SDO-RNC-S](#) [ACT20X-HUI-SAO-S](#) [ACT20X-SAI-HAO-S](#)