


- TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
 - ASSEMBLY MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- ③ PARTS PACKAGED IN TUBES.
 - ④ .000100-.000200 MATTE TIN-LEAD OVER .000050 NICKEL.
 - ⑤ .000100-.000200 BRIGHT TIN OVER .000050 NICKEL.
 - ⑥ PRELIMINARY PART - NOT RELEASED FOR PRODUCTION.
 - ⑦ HOUSING MATERIAL: FLAME RETARDANT THERMOPLASTIC; COLOR-BLACK.

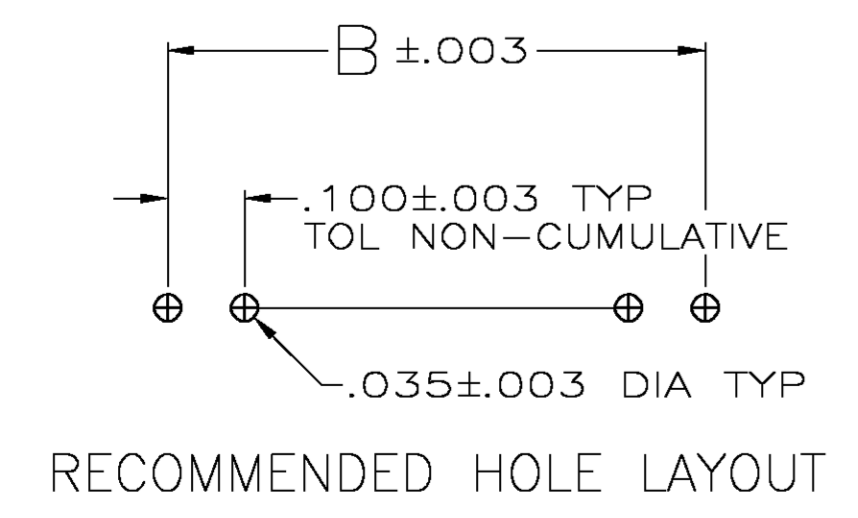

③	④	.484	.400	4	5	5-103327-4
④	④	3.584	3.500	35	36	5-103327-3
④	④	1.584	1.500	15	16	5-103327-2
④	④	.384	.300	3	4	5-103327-1
④	④	1.384	1.300	13	14	5-103327-0
④	④	3.984	3.900	39	40	4-103327-9
④	④	.984	.900	9	10	4-103327-8
④	④	.784	.700	7	8	4-103327-7
④	④	.584	.500	5	6	4-103327-6
④	④	.284	.200	2	3	4-103327-5
④	④	.184	.100	1	2	4-103327-4
④	④	.084	—	—	1	4-103327-3
④	④	1.184	1.100	11	12	4-103327-2
④	④	1.084	1.000	10	11	4-103327-1
④	④	3.984	3.900	39	40	4-103327-0
④	④	3.884	3.800	38	39	3-103327-9
④	④	3.784	3.700	37	38	3-103327-8
④	④	3.684	3.600	36	37	3-103327-7
④	④	3.584	3.500	35	36	3-103327-6
④	④	3.484	3.400	34	35	3-103327-5
④	④	3.384	3.300	33	34	3-103327-4
④	④	3.284	3.200	32	33	3-103327-3
④	④	3.184	3.100	31	32	3-103327-2
④	④	3.084	3.000	30	31	3-103327-1
④	④	2.984	2.900	29	30	3-103327-0
④	④	2.884	2.800	28	29	2-103327-9
④	④	2.784	2.700	27	28	2-103327-8
④	④	2.684	2.600	26	27	2-103327-7
④	④	2.584	2.500	25	26	2-103327-6
④	④	2.484	2.400	24	25	2-103327-5
④	④	2.384	2.300	23	24	2-103327-4
④	④	2.284	2.200	22	23	2-103327-3
④	④	2.184	2.100	21	22	2-103327-2
④	④	2.084	2.000	20	21	2-103327-1
④	④	1.984	1.900	19	20	2-103327-0
④	④	1.884	1.800	18	19	1-103327-9
④	④	1.784	1.700	17	18	1-103327-8
④	④	1.684	1.600	16	17	1-103327-7
④	④	1.584	1.500	15	16	1-103327-6
④	④	1.484	1.400	14	15	1-103327-5
④	④	1.384	1.300	13	14	1-103327-4
④	④	1.284	1.200	12	13	1-103327-3
④	④	1.184	1.100	11	12	1-103327-2
④	④	1.084	1.000	10	11	1-103327-1
④	④	.984	.900	9	10	1-103327-0
④	④	.884	.800	8	9	103327-9
④	④	.784	.700	7	8	103327-8
④	④	.684	.600	6	7	103327-7
④	④	.584	.500	5	6	103327-6
④	④	.484	.400	4	5	103327-5
④	④	.384	.300	3	4	103327-4
④	④	.284	.200	2	3	103327-3
④	④	.184	.100	1	2	103327-2
④	④	.084	—	—	1	103327-1
PLATING	C	B	A	NO OF POSN	PART NUMBER	

④ SUPERSEDED BY 1-103327-2
 ④ SUPERSEDED BY 1-103327-1

THIS DRAWING IS A CONTROLLED DOCUMENT.		DIN J. MARTINELLI 10/15/92	Tyco Electronics Corporation Harrisburg, PA 17105	
DIMENSIONS: INCHES		CIK JOHN KNITTLE 23NOV92	APVD B. FLINCHBAUGH 23NOV92	
TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ASSEMBLY, HEADER, BREAKAWAY, MOD II, SINGLE ROW, .100 C/L, VERTICAL, WITH .025 SQUARE POSTS		
0 PLC ± -		APPLICATION SPEC		
1 PLC ± -		SIZE CAGE CODE DRAWING NO		
2 PLC ± -		A1 00779 C=103327		
3 PLC ± .005		RESTRICTED TO		
4 PLC ± -		WEIGHT		
ANGLES ± -		CUSTOMER DRAWING		
FINISH SEE TABLE		SCALE 4:1 SHEET 1 OF 1 REV S		

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Headers & Wire Housings](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[95000-104TRLF](#) [10135584-644402LF](#) [DF62W-EP2022PCA](#) [95000-106TRLF](#) [DF62W-2022SCA](#) [DF62W-EP2022PC](#) [2203348](#) [DF62W-2022SC](#) [1084018](#) [1029039](#) [1084017](#) [802-10-012-10-002000](#) [1112640](#) [1112639](#) [891-007-9SS-BST1T](#) [000-34000](#) [0008550134](#) [0009482033](#) [0009507031](#) [57102-F02-18ULF](#) [57102-S06-03LF](#) [57202-S52-04LF](#) [PCN6-15S-2.5E](#) [0039019024](#) [58102-G61-06LF](#) [582553-1](#) [0009485154](#) [0009508121](#) [0022285053](#) [0050291907](#) [018731A](#) [LY20-4P-DT1-P1E-BR](#) [02.125.8002.8](#) [60101931](#) [60598-1 \(Cut Strip\)](#) [M1625-3R/100](#) [61062-3](#) [61082-181009](#) [CSU011177004](#) [636-1427](#) [638009-1](#) [641938-9](#) [641991-4](#) [644168-1](#) [644827-2](#) [647662-1](#) [65039-019ELF](#) [65692-001LF](#) [65781-018](#) [65781-047](#)