


# Tri-Rated Flexible PVC Equipment Wire **pro-POWER**

RoHS  
Compliant

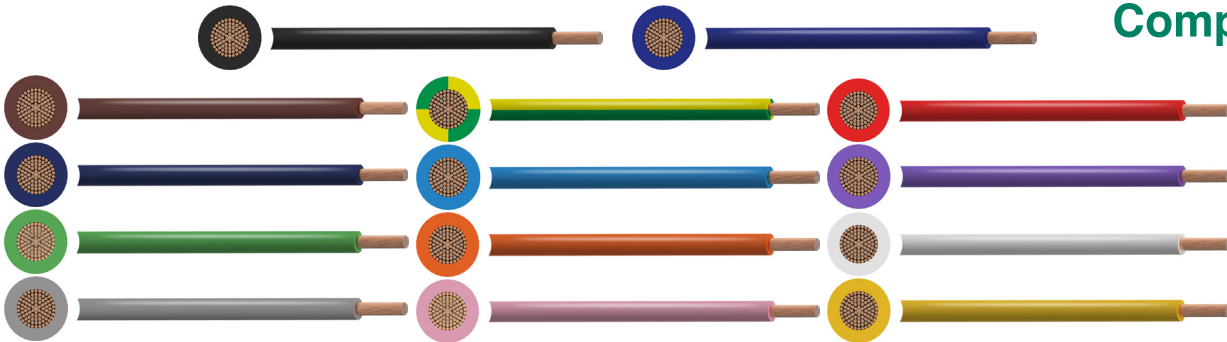

## Application:

High temperature, flame retardant wire designed for use in the switch control, relay and instrumentation panels of power switch-gear and for purposes such as internal connectors in rectifier equipment, motor starters and controllers. Tri-rated wire is sometimes referred to as BS 6231 cable, H07V2-K or panel wire.

## Cable Standards:

Made in accordance with the following:

BS EN 50525-2-31\* BS 6231 Type CK, UL Subj.758, CSA C22.2 No. 210 (HD 21.7 S2) #LL246095,  
BS EN/IEC 60332

## Construction:

UL Style Number : 1015  
Conductor : Class 5 flexible copper conductor according to BS EN 60228 (previously BS 6360)  
Insulation : PVC (Polyvinyl Chloride) Type Tl3 according to BS EN 50363

## Characteristics:

Voltage Rating (Uo/U) : UL, CSA: 450/750V  
BS 6231: 600/1000V  
BS EN 50525-2-31: 300/500V, 450/750V  
Temperature Rating : UL, CSA: +105°C  
BS 6231: +90°C  
Min. Bending Radius : 6 × overall diameter  
Sheath Colour : Black, Blue, Brown, Dark Blue, Green, Grey, Green/Yellow, Light Blue, Orange, Pink, Red, Violet, White & Yellow

## Note

\*BS EN 50525-2-31 covers harmonised conductor sizes up to 35mm<sup>2</sup>, wires above this size are generally to the specification. Where it is intended to connect wires contained within this datasheet to equipment or accessories confirmation should be obtained to ensure that they are capable of withstanding the operating temperature of the wire.

# Tri-Rated Flexible PVC Equipment Wire **pro-POWER**

## Dimensions:

Part Number	No. of Cores	Colour	Nominal Cross Sectional Area mm <sup>2</sup>	Approximate AWG	Nominal Thickness of Insulation mm	Nominal Overall Diameter mm	Nominal Weight kg/km					
PP001185	1	Black	0.5	21	0.8	2.7	11					
PP001195		Blue										
PP001204		Brown										
PP001214		Dark Blue										
PP001221		Green										
PP001228		Grey										
PP001238		Green/Yellow										
PP001248		Light Blue										
PP001255		Orange										
PP001262		Pink										
PP001269		Red										
PP001279		Violet										
PP001286		White										
PP001295		Yellow										
PP001186		Black						0.75	19	0.8	2.85	15
PP001196		Blue										
PP001205	Brown											
PP001215	Dark Blue											
PP001222	Green											
PP001229	Grey											
PP001239	Green/Yellow											
PP001249	Light Blue											
PP001256	Orange											
PP001263	Pink											
PP001270	Red											
PP001280	Violet											
PP001287	White											
PP001296	Yellow											
PP001187	Black	1	18	0.8	3	18						
PP001197	Blue											
PP001206	Brown											
PP001216	Dark Blue											
PP001223	Green											
PP001230	Grey											
PP001240	Green/Yellow											
PP001250	Light Blue											

# Tri-Rated Flexible PVC Equipment Wire **pro-POWER**

Part Number	No. of Cores	Colour	Nominal Cross Sectional Area mm <sup>2</sup>	Approximate AWG	Nominal Thickness of Insulation mm	Nominal Overall Diameter mm	Nominal Weight kg/km
PP001257	1	Orange	1	18	0.8	3	18
PP001264		Pink					
PP001271		Red					
PP001281		Violet					
PP001288		White					
PP001297		Yellow					
PP001188		Black	1.5	16		3.3	23
PP001198		Blue					
PP001207		Brown					
PP001217		Dark Blue					
PP001224		Green					
PP001231		Grey					
PP001241		Green/Yellow					
PP001251		Light Blue					
PP001258		Orange					
PP001265		Pink					
PP001272		Red					
PP001282		Violet					
PP001289		White					
PP001298		Yellow					
PP001189		Black	2.5	14		3.75	35
PP001199		Blue					
PP001208		Brown					
PP001218		Dark Blue					
PP001225		Green					
PP001232		Grey					
PP001242		Green/Yellow					
PP001252		Light Blue					
PP001259		Orange					
PP001266		Pink					
PP001273		Red					
PP001283		Violet					
PP001290		White					
PP001299	Yellow						
PP001190	Black	4	12	4.35	48		
PP001200	Blue						

# Tri-Rated Flexible PVC Equipment Wire **pro-POWER**

Part Number	No. of Cores	Colour	Nominal Cross Sectional Area mm <sup>2</sup>	Approximate AWG	Nominal Thickness of Insulation mm	Nominal Overall Diameter mm	Nominal Weight kg/km
PP001209	1	Brown	4	12	0.8	4.35	48
PP001219		Dark Blue		12			
PP001226		Green		12			
PP001233		Grey		12			
PP001243		Green/Yellow		12			
PP001253		Light Blue		12			
PP001260		Orange		12			
PP001267		Pink		12			
PP001274		Red		12			
PP001284		Violet		12			
PP001291		White		12			
PP001300		Yellow		12			
PP001191		Black	6	10	0.8	4.85	69
PP001201		Blue		10			
PP001210		Brown		10			
PP001220		Dark Blue		10			
PP001227		Green		10			
PP001234		Grey		10			
PP001244		Green/Yellow		10			
PP001254		Light Blue		10			
PP001261	Orange	10					
PP001268	Pink	10					
PP001275	Red	10					
PP001285	Violet	10					
PP001292	White	10					
PP001301	Yellow	10					
PP001192	Black	10	8	1	6.3	117	
PP001202	Blue		8				
PP001211	Brown		8				
PP001235	Grey		8				
PP001245	Green/Yellow		8				
PP001276	Red		8				
PP001293	White		8				
PP001302	Yellow		8				
PP001193	Black	16	6		8.1	191	
PP001203	Blue						

# Tri-Rated Flexible PVC Equipment Wire **pro-POWER**

Part Number	No. of Cores	Colour	Nominal Cross Sectional Area mm <sup>2</sup>	Approximate AWG	Nominal Thickness of Insulation mm	Nominal Overall Diameter mm	Nominal Weight kg/km
PP001212	1	Brown	16	6	1	8.1	191
PP001236		Grey					
PP001246		Green/Yellow					
PP001277		Red					
PP001294		White					
PP001303		Yellow					
PP001194		Black	25	4	1.2	9.4	281
PP001213		Brown					
PP001237		Grey					
PP001247		Green/Yellow					
PP001278	Red						

## Conductors

Class 5 Flexible Copper Conductors for Single Core Wire

Nominal Cross Sectional Area mm <sup>2</sup>	Max. Diameter of Wires in Conductor mm	Max. Resistance of Conductor at 20°C
		Plain Wires Ω/km
0.5	0.21	39
0.75	0.21	26
1	0.21	19.5
1.5	0.26	13.3
2.5	0.26	7.98
4	0.31	4.95
6	0.31	3.3
10	0.41	1.91
16	0.41	1.21
25	0.41	0.78

The above table is in accordance with BS EN 60228 (previously BS 6360)

## Electrical Characteristics:

Current Carrying Capacity and Voltage Drop

Nominal Cross Sectional Area mm <sup>2</sup>	Current Rating (Peak) Amps	Voltage Drop mV/A/m
0.5	11	46
0.75	14	31
1	17	22

# Tri-Rated Flexible PVC Equipment Wire **pro-POWER**

Nominal Cross Sectional Area mm <sup>2</sup>	Current Rating (Peak) Amps	Voltage Drop mV/A/m
1.5	21	15
2.5	30	9.1
4	41	5.7
6	53	3.8
10	75	2.2
16	100	1.4
25	136	0.89

Current ratings are based on a conductor operating temperature of 90°C and an ambient air temperature of 45°C and assumes single wire isolated in free air.

## De-Rating Factors:

Ambient Temperature	+45°C	+50°C	+55°C	+60°C	+65°C	+70°C	+75°C
De-Rating Factor	1	0.97	0.9	0.82	0.73	0.63	0.52

Where wires are to be grouped, the following factors should be applied

No. of Wires in Group	2	3	4	5	6	7	8
De-Rating Factor	0.8	0.7	0.65	0.6	0.56	0.53	0.5

## Part Number Table

Description	Nominal Cross Sectional Area mm <sup>2</sup>	Colour	Reel Length	Part Number
Tri-Rated Flexible PVC Equipment Wire	0.5	Black	100m	PP001185
		Blue		PP001195
		Brown		PP001204
		Dark Blue		PP001214
		Green		PP001221
		Grey		PP001228
		Green/Yellow		PP001238
		Light Blue		PP001248
		Orange		PP001255
		Pink		PP001262
		Red		PP001269
		Violet		PP001279
		White		PP001286
		Yellow		PP001295

# Tri-Rated Flexible PVC Equipment Wire **pro-POWER**

Description	Nominal Cross Sectional Area mm <sup>2</sup>	Colour	Reel Length	Part Number
Tri-Rated Flexible PVC Equipment Wire	0.75	Black	100m	PP001186
		Blue		PP001196
		Brown		PP001205
		Dark Blue		PP001215
		Green		PP001222
		Grey		PP001229
		Green/Yellow		PP001239
		Light Blue		PP001249
		Orange		PP001256
		Pink		PP001263
		Red		PP001270
		Violet		PP001280
		White		PP001287
		Yellow		PP001296
	1	Black		PP001187
		Blue		PP001197
		Brown		PP001206
		Dark Blue		PP001216
		Green		PP001223
		Grey		PP001230
		Green/Yellow		PP001240
		Light Blue		PP001250
		Orange		PP001257
		Pink		PP001264
		Red		PP001271
		Violet		PP001281
		White		PP001288
		Yellow		PP001297
	1.5	Black		PP001188
		Blue		PP001198
		Brown		PP001207
		Dark Blue		PP001217
		Green		PP001224
		Grey		PP001231
		Green/Yellow		PP001241
		Light Blue		PP001251
Orange		PP001258		

# Tri-Rated Flexible PVC Equipment Wire **pro-POWER**

Description	Nominal Cross Sectional Area mm <sup>2</sup>	Colour	Reel Length	Part Number
Tri-Rated Flexible PVC Equipment Wire	1.5	Pink	100m	PP001265
		Red		PP001272
		Violet		PP001282
		White		PP001289
		Yellow		PP001298
	2.5	Black		PP001189
		Blue		PP001199
		Brown		PP001208
		Dark Blue		PP001218
		Green		PP001225
		Grey		PP001232
		Green/Yellow		PP001242
		Light Blue		PP001252
		Orange		PP001259
		Pink		PP001266
		Red		PP001273
		Violet		PP001283
		White		PP001290
		Yellow		PP001299
		4		Black
	Blue			PP001200
	Brown			PP001209
	Dark Blue			PP001219
	Green			PP001226
	Grey			PP001233
	Green/Yellow			PP001243
	Light Blue			PP001253
	Orange			PP001260
	Pink			PP001267
	Red			PP001274
	Violet			PP001284
	White			PP001291
	Yellow			PP001300
	6			Black
		Blue		PP001201
		Brown		PP001210
		Dark Blue		PP001220



# Tri-Rated Flexible PVC Equipment Wire **pro-POWER**

Description	Nominal Cross Sectional Area mm <sup>2</sup>	Colour	Reel Length	Part Number
Tri-Rated Flexible PVC Equipment Wire	6	Green	100m	PP001227
		Grey		PP001234
		Green/Yellow		PP001244
		Light Blue		PP001254
		Orange		PP001261
		Pink		PP001268
		Red		PP001275
		Violet		PP001285
		White		PP001292
		Yellow		PP001301
	10	Black	PP001192	
		Blue	PP001202	
		Brown	PP001211	
		Grey	PP001235	
		Green/Yellow	PP001245	
		Red	PP001276	
		White	PP001293	
		Yellow	PP001302	
	16	Black	PP001193	
		Blue	PP001203	
		Brown	PP001212	
		Grey	PP001236	
		Green/Yellow	PP001246	
		Red	PP001277	
		White	PP001294	
		Yellow	PP001303	
	25	Black	PP001194	
		Brown	PP001213	
		Grey	PP001237	
		Green/Yellow	PP001247	
		Red	PP001278	

**Important Notice** : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

# X-ON Electronics

Authorized Distributor

*Click to view similar products for [Pro Power manufacturer](#).*

Other Similar products are found below :

[PPCY4C075100M](#) [PPCY3C10050M](#) [PPC217](#) [PP001328](#) [PP001316](#) [PP001109](#) [PP001088](#)

[PP000940](#) [PP030](#) [PP000909](#) [PP001326](#) [PP001308](#) [PP000877](#) [PP000868](#) [PP000704](#)

[PP001163](#) [PP001156](#) [PP001085](#) [PP000510](#) [PP001076](#) [PP000944](#) [PP000914](#) [PP000407](#)

[PP000386](#) [PP000870](#)