


High Temperature Silicone Wire SIAF/GL

pro-POWER

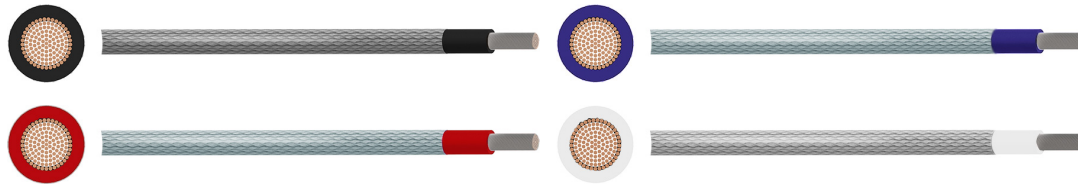

RoHS
Compliant

Application:

Designed for use in environments where sustained heat resistance and continued function is required during a fire. They have heat resistant properties up to 180°C and can also be employed at temperatures as low as -60°C. These wires are low smoke zero halogen and are particularly suitable for power plants, a wide range of industrial applications in processing, packaging, refrigeration, foundries, air craft construction and ship building .

Construction:

Conductor:

SIAF/GL - Class 5 flexible tinned copper conductor according to BS EN 60228 (previously BS 6360)

Insulation:

Silicone rubber

Outer Covering:

Fibre Glass Braid

Cable Standards

Made in accordance with the following:
Generally to BS EN 50525-2-41

Characteristics:

Voltage Rating (Uo/U)

0.75mm² and above : 300/500V

Temperature Rating:

Fixed: -60°C to +180°C

Min. Bending Radius:

Fixed : 4 x overall diameter

Sheath Colour:

Black, Blue, Red & White

High Temperature Silicone Wire SIAF/GL

pro-POWER

Dimensions:

Flexible Core Silicone Rubber Insulated Cable / Fibre Glass Braid (SIAF/GL)

Part Number	Colour	No. of Cores	Nominal Cross Sectional Area mm ²	Nominal Thickness of Insulation mm	Nominal Overall Diameter mm	Nominal Weight kg/km
PP001104	Black	1	0.75	0.55	2.4	14
PP001105	Blue					
PP001106	Red					
PP001107	White					
PP001108	Black		1		2.6	17
PP001109	Blue					
PP001110	Red					
PP001111	White					
PP001112	Black		1.5		2.9	22
PP001113	Blue					
PP001114	Red					
PP001115	White					

Conductors

Class 5 Flexible Copper Conductors for Single Core Cables

Nominal Cross Sectional Area mm ²	Max. Diameter of Wires in Conductor mm	Max. Resistance of Conductor at 20°C	
		Plain Wires Ω/km	Metal-Coated Wires Ω/km
0.75	0.21	26	26.7
1	0.21	19.5	20
1.5	0.26	13.3	13.7

The above table is in accordance with BS EN 60228 (previously BS 6360)

Electrical Characteristics:

Flexible Core Silicone Rubber Insulated Cable / Fibre Glass Braid (SIAF/GL)

Nominal Cross Sectional Area mm ²	Current Rating in Air Amps					
	at 30°C	at 60°C	at 90°C	at 120°C	at 150°C	at 170°C
0.75	30	26	22	17	11	6
1	35	31	26	20	13	7
1.5	44	38	52	25	17	8

Conductor operating temperature 180°C

High Temperature Silicone Wire SIAF/GL

pro-POWER

Part Number Table

Description	Nominal Cross Sectional Area mm ²	Colour	Reel Length	Part Number
High Temperature Silicone Wire SIAF/GL	0.75	Black	100m	PP001104
		Blue		PP001105
		Red		PP001106
		White		PP001107
	1	Black		PP001108
		Blue		PP001109
		Red		PP001110
		White		PP001111
	1.5	Black		PP001112
		Blue		PP001113
		Red		PP001114
		White		PP001115

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
www.farnell.com
www.newark.com
www.cpc.co.uk

pro-POWER

X-ON Electronics

Authorized Distributor

Click to view similar products for [Pro Power manufacturer](#).

Other Similar products are found below :

[PPCY4C075100M](#) [PPCY3C10050M](#) [PPC217](#) [PP001328](#) [PP001316](#) [PP001109](#) [PP001088](#)

[PP000940](#) [PP030](#) [PP000909](#) [PP001326](#) [PP001308](#) [PP000877](#) [PP000868](#) [PP000704](#)

[PP001163](#) [PP001156](#) [PP001085](#) [PP000510](#) [PP001076](#) [PP000944](#) [PP000914](#) [PP000407](#)

[PP000386](#) [PP000870](#)