


High Temperature SIAF

Flexible Silicone Wire BS EN 50525-2-41

pro-POWER

RoHS
Compliant

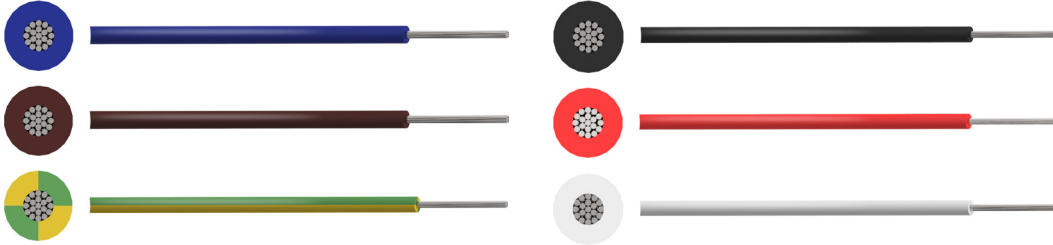

Application:

Designed for use in environments where sustained heat resistance is required, SIAF wire has heat resistant properties up to 180°C and can also be employed at temperatures as low as -60°C. This wire is low smoke zero halogen and is suitable for power plants, a wide range of industrial applications in processing, packaging, refrigeration, foundries, air craft construction and ship building.

Construction:

Conductor:

SIAF/H05S-K - Class 5 flexible tinned copper conductor according to BS EN 60228 (previously BS 6360)

Insulation:

Silicone rubber

Cable Standards:

Made in accordance with the following:
BS EN 50525-2-41 (0.5mm² to 2.5mm²)

Characteristics:

Voltage Rating (Uo/U)

0.5mm² to 2.5mm² : 300/500V

Temperature Rating:

Fixed: -60°C to +180°C

Min. Bending Radius:

Fixed : 4 x overall diameter

Sheath Colour:

Blue, Brown, Green/Yellow, Black, Red & White

High Temperature SIAF

Flexible Silicone Wire BS EN 50525-2-41

pro-POWER

Dimensions:

Flexible Core Silicone Rubber Insulated Cable (SIAF)

Part Number	Colour	No. of Cores	Nominal Cross Sectional Area mm ²	No. of Strands × Strand Size	Nominal Thickness of Insulation mm	Nominal Overall Diameter mm	Nominal Weight kg/km
PP001074	Blue	1	0.5	16 × 0.2mm	0.6	2.1	10
PP001075	Brown						
PP001076	Green/Yellow						
PP001077	Black						
PP001078	Red						
PP001079	White						
PP001080	Blue		0.75	24 × 0.2mm		2.3	13
PP001081	Brown						
PP001082	Green/Yellow						
PP001083	Black						
PP001084	Red						
PP001085	White						
PP001086	Blue		1	32 × 0.2mm		2.5	15
PP001087	Brown						
PP001088	Green/Yellow						
PP001089	Black						
PP001090	Red						
PP001091	White						
PP001092	Blue	1.5	30 × 0.25mm	2.8	21		
PP001093	Brown						
PP001094	Green/Yellow						
PP001095	Black						
PP001096	Red						
PP001097	White						
PP001098	Blue	2.5	50 × 0.25mm	0.7	3.5	34	
PP001099	Brown						
PP001100	Green/Yellow						
PP001101	Black						
PP001102	Red						
PP001103	White						

High Temperature SIAF

Flexible Silicone Wire BS EN 50525-2-41



Conductors

Class 5 Flexible Copper Conductors for Single Core Wire (SIAF)

Nominal Cross Sectional Area mm ²	Max. Diameter of Wires in Conductor mm	Max. Resistance of Conductor at 20°C	
		Plain Wires Ω/km	Metal-Coated Wires Ω/km
0.5	0.21	39	40.1
0.75	0.21	26	26.7
1	0.21	19.5	20
1.5	0.26	13.3	13.7
2.5	0.26	7.98	8.21

The above table is in accordance with BS EN 60228 (previously BS 6360)

Electrical Characteristics:

Flexible Core Silicone Rubber Insulated Wire (SIAF)

Nominal Cross Sectional Area mm ²	Current Rating in Air Amps					
	at 30°C	at 60°C	at 90°C	at 120°C	at 150°C	at 170°C
0.5	23	20	17	13	9	5
0.75	30	26	22	17	11	6
1	35	31	26	20	13	7
1.5	44	38	52	25	17	8
2.5	61	53	45	35	23	12

Conductor operating temperature 180°C

Part Number Table

Description	Nominal Cross Sectional Area mm ²	Colour	Reel Length	Part Number
High Temperature SIAF Flexible Silicone Wire BS EN 50525-2-41	0.5	Blue	100m	PP001074
		Brown		PP001075
		Green/Yellow		PP001076
		Black		PP001077
		Red		PP001078
		White		PP001079
	0.75	Blue		PP001080
		Brown		PP001081
		Green/Yellow		PP001082
		Black		PP001083

High Temperature SIAF

Flexible Silicone Wire BS EN 50525-2-41

pro-POWER

Description	Nominal Cross Sectional Area mm ²	Colour	Reel Length	Part Number
High Temperature SIAF Flexible Silicone Wire BS EN 50525-2-41	0.75	Red	100m	PP001084
		White		PP001085
	1	Blue		PP001086
		Brown		PP001087
		Green/Yellow		PP001088
		Black		PP001089
		Red		PP001090
		White		PP001091
		1.5		Blue
	Brown			PP001093
	Green/Yellow			PP001094
	Black			PP001095
	Red			PP001096
	White			PP001097
	2.5	Blue		PP001098
		Brown		PP001099
		Green/Yellow		PP001100
		Black		PP001101
		Red		PP001102
				White

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
 www.farnell.com
 www.newark.com
 www.cpc.co.uk

pro-POWER

X-ON Electronics

Authorized Distributor

Click to view similar products for [Pro Power manufacturer](#).

Other Similar products are found below :

[PPCY4C075100M](#) [PPCY3C10050M](#) [PPC217](#) [PP001328](#) [PP001316](#) [PP001109](#) [PP001088](#)

[PP000940](#) [PP030](#) [PP000909](#) [PP001326](#) [PP001308](#) [PP000877](#) [PP000868](#) [PP000704](#)

[PP001163](#) [PP001156](#) [PP001085](#) [PP000510](#) [PP001076](#) [PP000944](#) [PP000914](#) [PP000407](#)

[PP000386](#) [PP000870](#)