


Product Details for 44A1131 -20 -0/2/9 -9-US

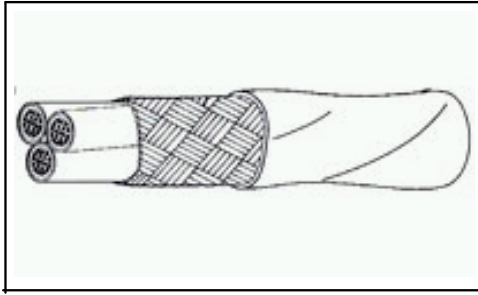

**44A1131 -20 -
0/2/9 -9-US**

Tyco Part Number: 382232 -
015

[Active](#)

Spec 44 and Spec 55 Wire and Cable

[Not ELV or RoHS Compliant](#)

Product Highlights:

- ? Wire Source = United States
- ? Cable Type = Spec 44
- ? Cable Style = Jacketed, Round -Braid Shielded
- ? Wire Size (AWG/CM) = 20 AWG
- ? Voltage Rating = 600 VAC

[View all Features](#)

Quick Links

- [Check Pricing & Availability](#)
- [Search for Tooling](#)
- [Product Feature Selector](#)
- [Contact Us About This Product](#)

Documentation & Additional Information

Product Drawings:

- ? [THREE CONDUCTOR CABLE, RADIATION -CROSSLINKED, POLYAL...](#) (PDF, English)

Catalog Pages/Data Sheets:

- ? [Wire and Cable, Harnessing and Protection Products](#) (PDF, English)

Product Specifications:

- ? None Available

Application Specifications:

- ? None Available

Instruction Sheets:

- ? None Available

CAD Files:

- ? None Available

Additional Information:

- ? [Product Line Information](#)

Related Products:

- ? [Tooling](#)

[List all Documents](#)

Product Features (Please use the Product Drawing for all design activity)

Product Type Features:

- ? [Cable Style](#) = Jacketed, Round -Braid Shielded
- ? Number of Conductors = Twisted Triple

Electrical Characteristics:

- ? Voltage Rating (VAC) = 600

Body Related Features:

- ? Wire Size (AWG/CM) = 20 AWG
- ? Cable Jacket Color = White
- ? Conductor Type = Tin -Coated Copper
- ? Wire Color = Black, Red, White
- ? Outside Diameter (mm [in]) = 3.99 [0.257]
- ? Wire Diameter (mm [in]) = 1.40 [0.055]
- ? Conductor O.D. (mm [in]) = 1.01 [0.040]

Configuration Related Features:

- ? [Cable Type](#) = Spec 44

Industry Standards:

- ? Government/Industry Qualification = No
- ? [RoHS/ELV Compliance](#) = Not ELV/RoHS compliant
- ? [Lead Free Solder Processes](#) = Not relevant for lead free process

Conditions for Usage:

- ? Temperature Range (°C) = -65 - +150

Operation/Application:

- ? Application = General Purpose - Lightweight

Packaging Related Features:

- ? Wire Source = United States
- ? Wire Size - Details = 20 AWG 0.62 mm², 0.00095 in², 19 x 32 AWG
- ? Shield (Screen) Diameter (mm [in]) = 3.58 [0.141]

Other:

- ? Brand = Raychem

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multi-Paired Cables](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[7-21000-9](#) [1213 009U1000](#) [1416402/M12MS/IP20/10](#) [9804 060100](#) [9808 060100](#) [9843 060100](#) [9873 060100](#) [190-038045-00](#)
[44A0121-12-996CS2275](#) [55PC0211-14-9](#) [55PC0216-24-9](#) [55PC0221-22-2/6CS2756](#) [55PC0811-16-9](#) [55PC0811-24-9](#) [55PC1131-20-029-9](#)
[Y60912](#) [CW1922-000](#) [RI55D](#) [9157 060100](#) [2020D0309-0](#) [9774 060100](#) [8334 060100](#) [1350SB 0101000](#) [2412 0061000](#) [8342 060100](#) [8740](#)
[060U1000](#) [9505 060U1000](#) [3613 003A1000](#) [44A0121-22-0/9-MX](#) [2412 009U1000](#) [82777 8771000](#) [9406 T35100](#) [2413 002A1000](#) [3613](#)
[D151000](#) [1533R 0101000](#) [1533P 0101000](#) [9272 006U1000](#) [2413F D15A500](#) [9681 0601000](#) [1533R 0061000](#) [RIT1000](#) [1533R 006A1000](#)
[9812 060100](#) [2221 B59U1000](#) [10GX13 D151000](#) [1874A 004A1000](#) [8340 060100](#) [8333 0601000](#) [1533R 0021000](#) [1583A 012U1000](#)