

# Three-phase monitoring relays

## CM-PFD.C1

The CM-PFD.C1 is a three-phase monitoring relay that monitors the phase parameters phase sequence and phase failure in three-phase mains. With their MDRC profile and a width of only 17.5 mm, the CM-D range relays are ideally suited for installation in distribution panels as well as for industrial applications where compact dimensions are required.



### Characteristics

- Monitoring of three-phase mains for phase sequence and phase failure
- Powered by the measuring circuit
- 1 c/o (SPDT) contact
- Width of only 17.5 mm (0.689 in)

### Order data

Three-phase monitoring relay

Type	Rated control supply voltage = measuring voltage	Order code
CM-PFD.C1	3 x 380-440 V AC	1SVR590982R0100

## Functions

### Application / Operating mode

The CM-PFD.C1 is designed for use in three-phase mains for monitoring the phase parameters phase sequence and phase failure.

It works according to the closed-circuit principle.


## Function descriptions / diagrams

### Phase sequence and phase failure monitoring


If all phases are present with the correct phase sequence, the output relay energizes after the fixed start-up delay  $t_s$  is complete.

If a phase failure or a phase sequence error occurs, the fixed tripping delay  $t_v$  starts. When timing is complete, the output relay de-energizes. The LED R glows when the output relay is energized.

In case of motors which continue running with only two phases, the CM-PFE detects phase failure if the reverse fed voltage is less than 60 % of the originally applied voltage.

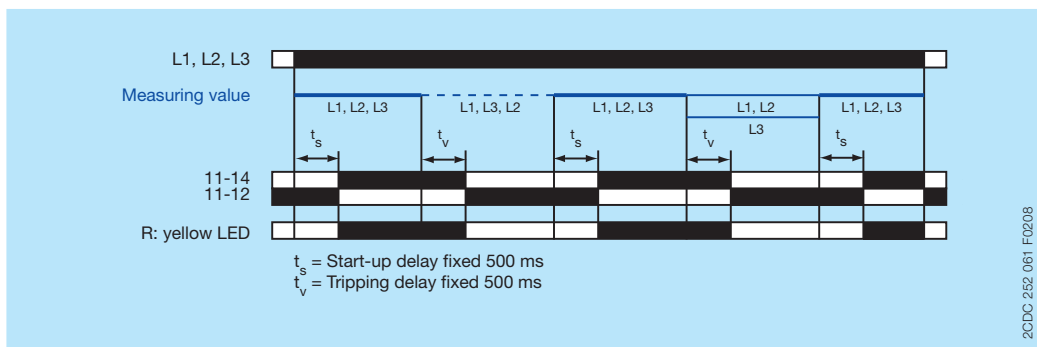

## Electrical connection

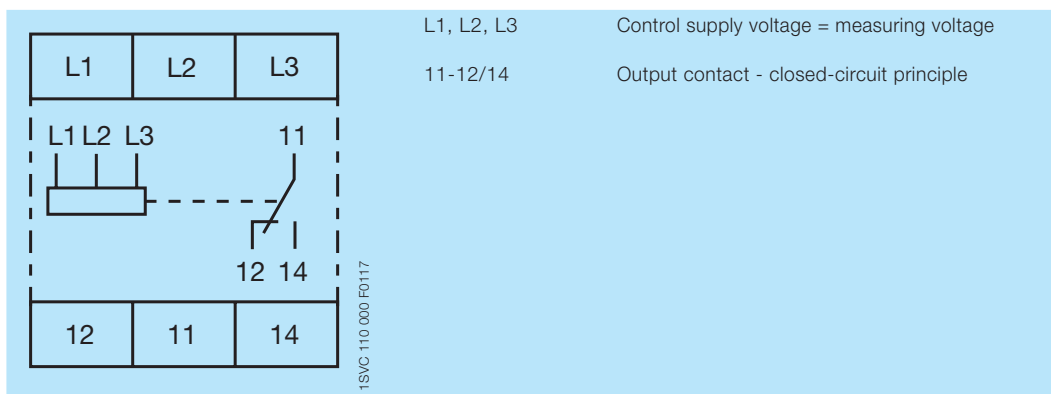

Connection diagram CM-PFD

## Technical data

Data at  $T_a = 25\text{ °C}$  and rated values, unless otherwise indicated

### Input circuits

Type		CM-PFD
<b>Supply circuit = measuring circuit</b>		<b>L1, L2, L3</b>
Rated control supply voltage $U_s =$ measuring voltage		3 x 380-440 V AC
Rated control supply voltage $U_s$ tolerance		-15...+10 %
Rated frequency		50/60 Hz
Frequency range		45-65 Hz
Typical current / power consumption	400 V AC / 50 Hz	8 mA / 5 VA
<b>Measuring circuit</b>		<b>L1, L2, L3</b>
Monitoring functions		phase failure detection, phase sequence monitoring
Measuring ranges		3 x 380-440 V AC
Threshold value for phase failure	$U_{min}$	$0.6 \times U_N$
Hysteresis related to the threshold value		-
Response time		500 ms
Measuring principle		true RMS
<b>Timing circuit</b>		
Start-up delay $t_s$		fixed 500 ms
Tripping delay $t_v$		-

### Output circuits

Kind of output	11-12/14	relay, 1 c/o (SPDT) contact
Operating principle		closed-circuit principle <sup>1)</sup>
Contact material		AgNi alloy, Cd free
Rated voltage (IEC/EN 60947-1)		250 V AC
Minimum switching voltage / Minimum switching current		24 V / 10 mA
Maximum switching voltage / Maximum switching current		440 V / 1.0 A
Mechanical lifetime		$30 \times 10^6$ switching cycles
Electrical lifetime	AC-12, 230 V, 4 A	$0.1 \times 10^6$ switching cycles
Maximum fuse rating to achieve short-circuit protection	n/c contact n/o contact	6 A fast-acting 10 A fast-acting

<sup>1)</sup> Closed-circuit principle: Output relay is de-energized if the measured value exceeds/drops below the adjusted threshold.

### General data

MTBF		on request
Duty cycle		100 %
Dimensions		see 'Dimensional drawings'
Weight	net	0.054 kg (0.119 lb)
Mounting		DIN rail (IEC/EN 60715), snap-on mounting without any tool
Mounting position		any
Minimum distance to other units	vertical / horizontal	not necessary
Degree of protection	housing terminals	IP50 IP20

### Electrical connection

Connecting capacity	fine-strand with wire end ferrule	1 x 0.5-2.5 mm <sup>2</sup> / 2 x 0.5-1.5 mm <sup>2</sup> (1 x 20-14 AWG / 2 x 20-16 AWG)
	fine-strand without wire end ferrule	1 x 0.5-2.5 mm <sup>2</sup> / 2 x 0.5-1.5 mm <sup>2</sup> (1 x 20-14 AWG / 2 x 20-16 AWG)
	rigid	1 x 0.5-4 mm <sup>2</sup> / 2 x 0.5-1.5 mm <sup>2</sup> (1 x 20-12 AWG / 2 x 20-16 AWG)
Stripping length		7 mm (0.28 in)
Tightening torque		0.5-0.8 Nm (4.43-7.08 lb.in)
Recommended screw driver		PZ1 / Ø 4.5 mm (0.177)

## Environmental data

Ambient temperature ranges	operation	-20...+60 °C
	storage	-40...+85 °C
	transport	-40...+85 °C
Climatic class	IEC/EN 60721-3-3	3K3
Damp heat, cyclic	IEC/EN 60068-2-30	6 x 24 h cycle, 55 °C, 95 % RH
Vibration, sinusoidal	IEC/EN 60255-21-1	class 2
Shock	IEC/EN 60255-21-2	class 2

## Isolation data

Rated insulation voltage $U_i$ (IEC/EN 60255-27, IEC/EN 60664-1)	input circuit / output circuit	600 V
Rated impulse withstand voltage $U_{imp}$ (IEC/EN 60255-27, IEC/EN 60664-1)	input circuit / output circuit	6 kV
Pollution degree (IEC/EN 60255-27, IEC/EN 60664-1)		2
Overvoltage category (IEC/EN 60255-27, IEC/EN 60664-1)		III

## Standards / Directives


Standards	IEC/EN 60255-1, IEC/EN 60255-27
Low Voltage Directive	2014/35/EU
EMC Directive	2014/30/EU
RoHS Directive	2011/65/EU

## Electromagnetic compatibility


Interference immunity to		IEC/EN 60255-26
electrostatic discharge	IEC/EN 61000-4-2	Level 3 (6 kV / 8 kV)
radiated, radio-frequency, electromagnetic field	IEC/EN 61000-4-3	Level 3 (10 V/m)
electrical fast transient / burst	IEC/EN 61000-4-4	Level 3 (2 kV / 5 kHz)
surge	IEC/EN 61000-4-5	Level 4 (2 kV L-L)
conducted disturbances, induced by radio-frequency fields	IEC/EN 61000-4-6	Level 3 (10 V)
Interference emission		IEC/EN 60255-26, EN 61000-6-3
high-frequency radiated	IEC/CISPR 11, EN 55011	Class B
high-frequency conducted	IEC/CISPR 11, EN 55011	Class B

## Technical diagrams


### Load limit curves

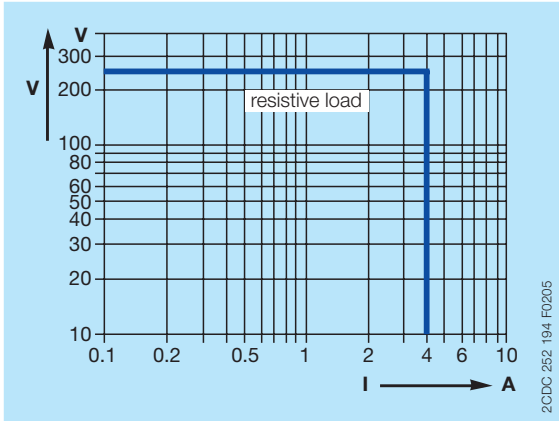


AC load (resistive)

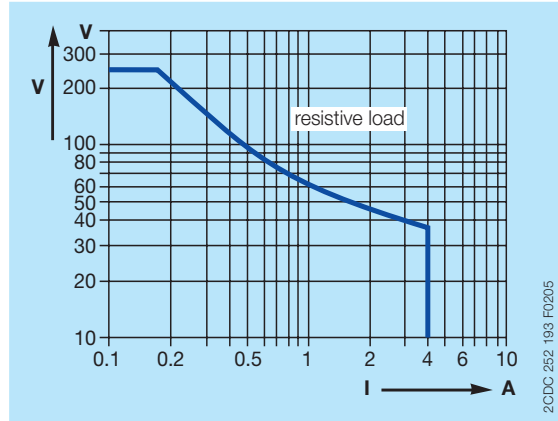

DC load (resistive)

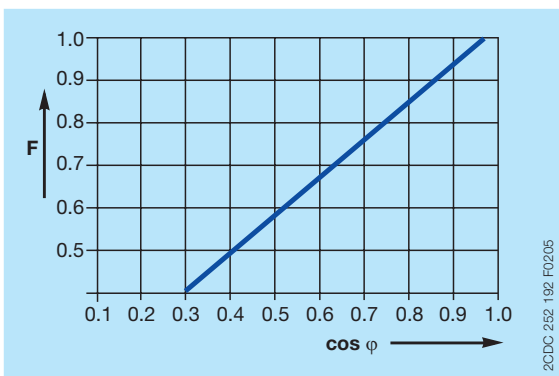


Derating factor F for inductive AC load

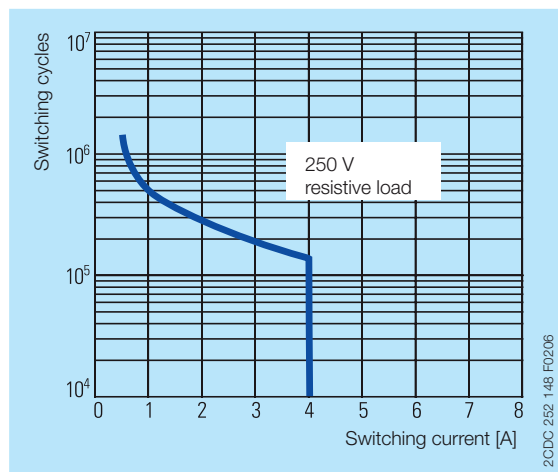

Contact lifetime

## Dimensions

in mm and inches

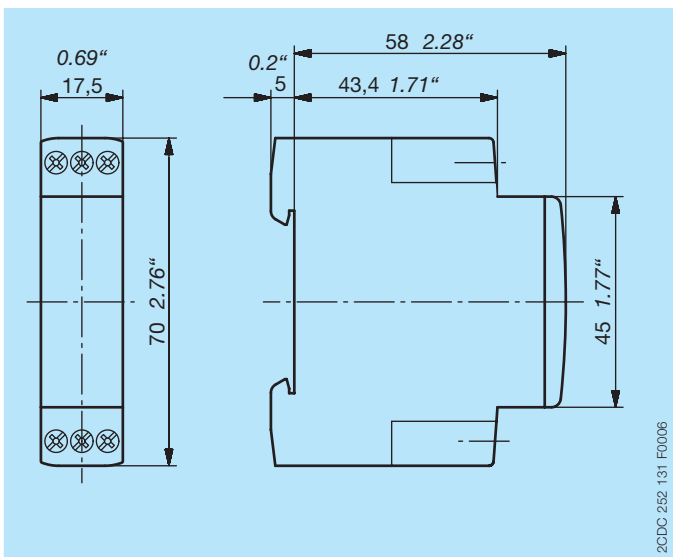

# Contact us

## **ABB STOTZ-KONTAKT GmbH**

P. O. Box 10 16 80  
69006 Heidelberg, Germany  
Phone: +49 (0) 6221 7 01-0  
Fax: +49 (0) 6221 7 01-13 25  
E-mail: info.desto@de.abb.com

You can find the address of your  
local sales organisation on the  
ABB home page  
<http://www.abb.com/contacts>  
-> Low Voltage Products and Systems

### **Note:**

We reserve the right to make technical changes or modify the contents of this document without prior notice. With regard to purchase orders, the agreed particulars shall prevail. ABB AG does not accept any responsibility whatsoever for potential errors or possible lack of information in this document.

We reserve all rights in this document and in the subject matter and illustrations contained therein. Any reproduction, disclosure to third parties or utilization of its contents – in whole or in parts – is forbidden without prior written consent of ABB AG.

Copyright© 2017 ABB  
All rights reserved

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Industrial Relays](#) category:*

*Click to view products by [ABB](#) manufacturer:*

Other Similar products are found below :

[6-1617801-8](#) [6-1618107-9](#) [7-1618273-3](#) [EV250-6A-01](#) [FCA-125-CX8](#) [FCA-325-159](#) [FCA-410-138](#) [8000-S3121](#) [8-1618273-6](#) [8-1618393-1](#)  
[GCA63A220VAC60HZ](#) [GCA63A277VAC60HZ](#) [GCA63A600VAC60HZ](#) [1-1672275-3](#) [1-1833005-4](#) [H-16/S1](#) [A711Z](#) [H-8C](#) [H-8/S11](#) [H-8/S68](#) [ACC530U20](#) [ACC730U30](#) [RF303ZM4-12](#) [DH18DA](#) [1423675-8](#) [AR4-15F13-C01](#) [AR7-41F11](#) [AVR907](#) [15732A200](#) [B07B032AC1-0329](#) [B329](#) [B490A](#) [1618279-1](#) [BHR124Y](#) [1810DDB-SX](#) [P30C42A12D1-120](#) [2-1617748-6](#) [2-1618375-1](#) [2-1618396-6](#) [2-1618398-1](#)  
[JMAPD-5XL](#) [JMGACD-5M](#) [JMGSC-5LW](#) [JMGSCD-5L](#) [PBO-18A1218](#) [PBO-40A3040](#) [K8DSPH1200480VAC](#) [KA-3C-12A](#) [2307497](#) [K-D4A-300M](#)