

SECTION 2 PCB TERMINAL BLOCKS

**PCB
TERMINAL
BLOCKS**


3.5mm Pitch **Ultra Low Profile** Screw Terminal 3882615 + 3882627

Features

- Ultra low profile
- Stainless steel wire protector
- 2-12 pole interlocking
- Flame retardant material
- Double interlock mechanism for increased strength
- UL & CSA applied for
- 1mm² cable entry
- Anti solder wicking terminals
- Captive screws
- Guided pin alignment
- Standard colour black. Other colours available



| Type No. | Poles | Length |
|------------|-------|--------|
| CTB3051/2 | 2 | 7mm |
| CTB3051/3 | 3 | 10.5mm |
| CTB3051/4 | 4 | 14mm |
| CTB3051/5 | 5 | 17.5mm |
| CTB3051/6 | 6 | 21mm |
| CTB3051/7 | 7 | 24.5mm |
| CTB3051/8 | 8 | 28mm |
| CTB3051/9 | 9 | 31.5mm |
| CTB3051/10 | 10 | 35mm |
| CTB3051/11 | 11 | 38.5mm |
| CTB3051/12 | 12 | 42mm |

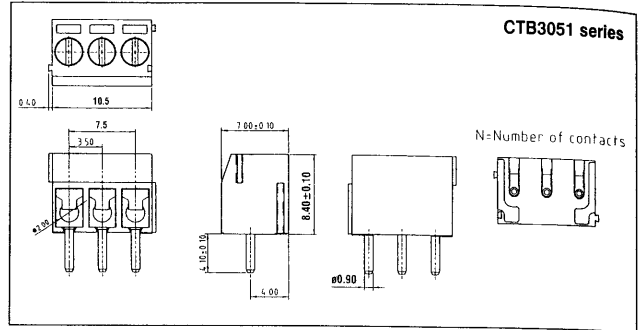

Specification

| | |
|---------------------------|--|
| Rating | 10A/125Vac |
| Dielectric strength | 1.5kV |
| Insulation resistance | 5MΩ/1000V |
| Working temperature | -33°C to 125°C |
| Short period | 160°C |
| Moulding | UL94-V0 flame retardant PA66 |
| Pin/terminal | 5μ tinned, nickel plated copper flash brass |
| Screw/torque | M2 steel, 5μ zinc & colour passivated 0.4Nm max |
| Recommended PCB hole size | ø1.1mm |


3.5mm Pitch **Ultra Low Profile 90°** Screw Terminal

Features

- Ultra low profile
- Stainless steel wire protector
- 2-12 pole interlocking
- Flame retardant material
- Double interlock mechanism for increased strength
- UL & CSA applied for
- 1mm² cable entry
- Anti solder wicking terminals
- Captive screws
- Guided pin alignment
- Standard colour black. Other colours available



| Type No. | Poles | Length |
|------------|-------|--------|
| CTB3551/2 | 2 | 7mm |
| CTB3551/3 | 3 | 10.5mm |
| CTB3551/4 | 4 | 14mm |
| CTB3551/5 | 5 | 17.5mm |
| CTB3551/6 | 6 | 21mm |
| CTB3551/7 | 7 | 24.5mm |
| CTB3551/8 | 8 | 28mm |
| CTB3551/9 | 9 | 31.5mm |
| CTB3551/10 | 10 | 35mm |
| CTB3551/11 | 11 | 38.5mm |
| CTB3551/12 | 12 | 42mm |

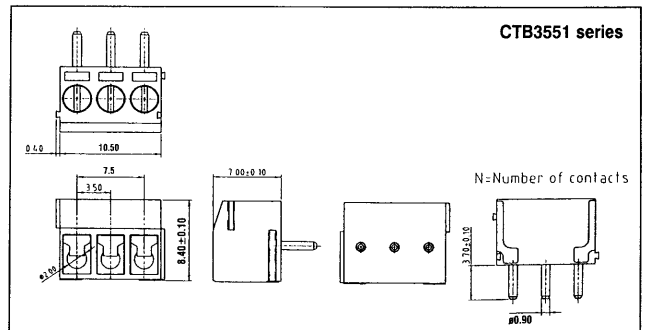

Specification

| | |
|---------------------------|--|
| Rating | 10A/125Vac |
| Dielectric strength | 1.5kV |
| Insulation resistance | 5MΩ/1000V |
| Working temperature | -33°C to 125°C |
| Short period | 160°C |
| Moulding | UL94-V0 flame retardant PA66 |
| Pin/terminal | 5μ tinned, nickel plated copper flash brass |
| Screw/torque | M2 steel, 5μ zinc & colour passivated 0.4Nm max |
| Recommended PCB hole size | ø1.1mm |



FM28614
BS EN ISO 9002:
1994

Tel: +44 (0)1727 864437 Fax: +44 (0)1727 855400
E-mail: info@camden-electronics.co.uk Website: www.camden-electronics.co.uk

Because we operate a constant improvement policy, our products are subject to change without notice.

CAMDEN
ELECTRONICS LTD

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [camden manufacturer](#):

Other Similar products are found below :

[412689X](#) [CTBP92HE/10](#) [CTBP92VE/12R](#) [CTBP9350/12](#) [IND515205-240-T/GRN](#) [IND515205-240-T/RD](#) [IND5032405-240-T/GRN](#)
[CE10.00.EI](#) [C192SHAND](#) [RTM5006/16-PAT](#) [CNMB/6ST/2](#) [CNMB/4ST/2](#) [CSACST004](#) [CTBP9200/9](#) [CIME/M/BE2250SS](#) [CHH64E1BL](#)
[CIM/15W-DMFS](#) [CHHBAT2GY](#) [CFTBN/2](#) [CCB2S1/04](#) [CHDX6-222C](#) [CHDX8-224](#) [CHDASMP29](#) [CHDASMP34](#) [CHDX810DD](#)
[CHDX811DD](#) [CCTTM40LR](#) [CTBP92VJ/5S](#) [CTBP92VJ/8R](#) [CTSN431/12/M](#) [CTSN433/12/M](#) [CUABOX006](#) [IND513113-LED-RD](#)
[CE10.00.FM](#) [CBRPH-BLK](#) [RX2008/S-5-WH](#) [CBARD-CAR](#) [CRDCG0007](#) [CNMB/4/KIT](#) [CTB5050/5](#) [CTBP92HE/11](#) [CTBP9358/10AO](#)
[CHH66C2GY](#) [CHH456PBK](#) [CHH451ABK](#) [CIM/9W-DMFS](#) [CIM/25W-DMFS](#) [RTM5004/14-NC-BLK](#) [RTM5006/16-NC-BLK](#)
[IND5032405-125-T/AMB](#)