


## Description

The PRO-EB-450 Evaluation board is designed to provide a means to facilitate engineering evaluation of the OnBoard 2.4 GHz SMD antenna: PRO-OB-440. With a typical operating frequency range of 2.4 ~ 2.5 GHz, the antenna can be used for WiFi/BT/BLE/ZigBee/ISM applications.


To evaluate the performance of antenna, calibrate the Vector Network analyzer (VNA) for the testing frequency band and connect the evaluation board to the calibrated port using the given SMA connector on the board.

## **Product Image**

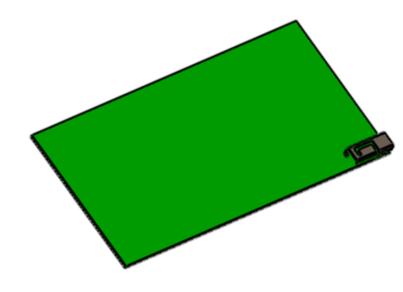

## **Antenna Images**







5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 11-01-22** 



**PRO-EB-450** 

Request Samples 🕥

Check Inventory

100.0 x 50.0 mm RoHS/RoHS II Compliant MSL Level = 1

# **Electrical Specification**

Parameter	Specification	Unit	
Operating Frequency	2400 - 2500	MHz	
Center Frequency	2450		
Return Loss	< -6.9	dB	
Polarization	Mixed Linear	-	
Maximum Gain	< 5.0	dBi	
Efficiency	> 65	%	
Impedance	50	Ω	

<u>Note</u>: All measurements were conducted on the evaluation board in free space. Performance will vary depending on the ground plane, application, and environment.


# **Mechanical Specification**


Parameter	Specification
Evaluation board Dimension	100.0 x 50.0 mm



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com


**REVISED: 11-01-22** 

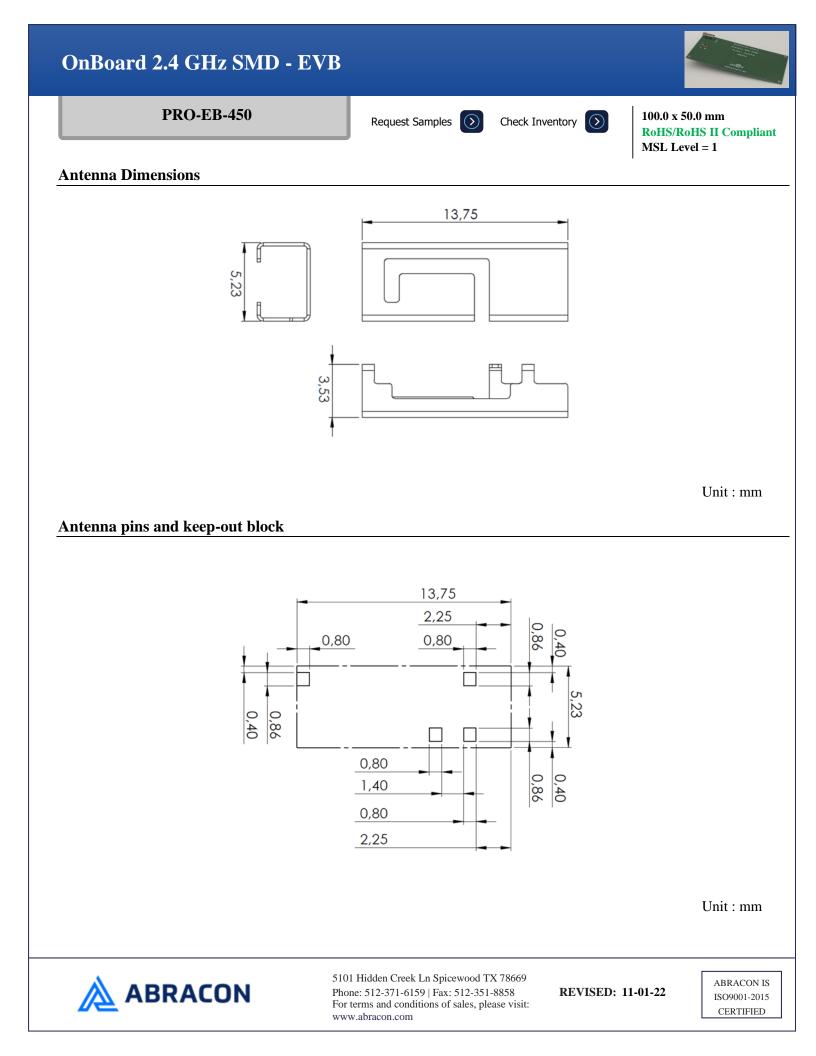


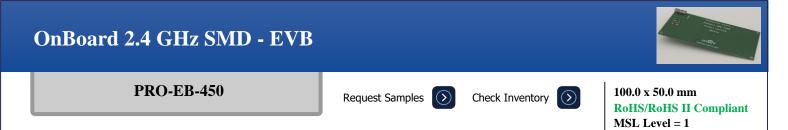

#### PCB layout and antenna pin numbering

The antenna uses PIFA technology and should thus be mounted on a ground plane. If there are several layers in the PCB, there is an advantage to add vias for smooth interconnection of the ground areas to avoid splits in the ground plane. It is also important that there is a ground clearance around the NC pads and the RF feed pad, through all layers of the PCB. It is recommended to implement a matching network to optimize the antenna impedance in your application. The components can be positioned under the antenna. See recommendations in the figures below.

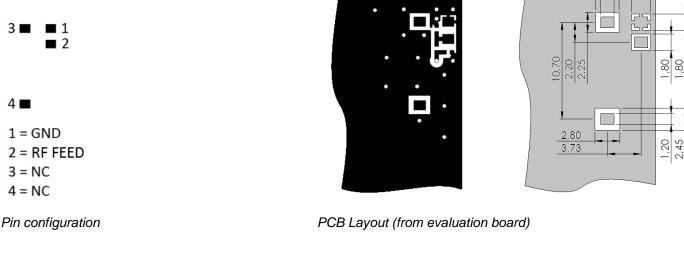



Clearance through all layers

Unit : mm




5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 11-01-22** 

<u>2,</u>60 1,50


2.10

45

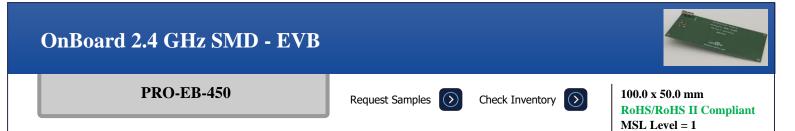

## **Measurement Setup**


The antenna measurements were all done in free space with the OnBoard SMD 2400 evaluation board (PRO-EB-450) that has a PCB size of 100 x 50 mm.

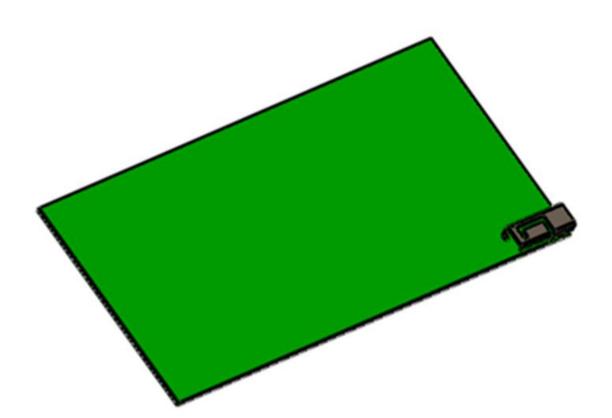




5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com


**REVISED: 11-01-22** 

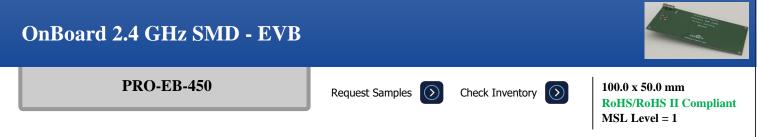


## **Reflection Characteristics – Return Loss**

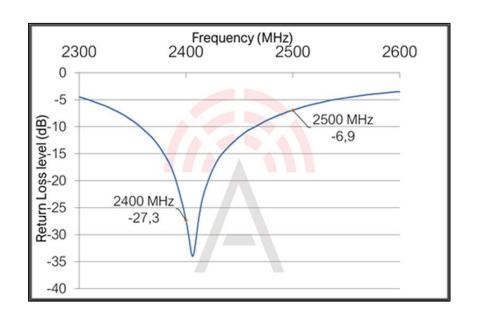

# **Total Radiation Efficiency**

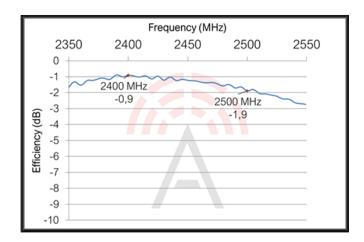


# **Maximum Radiation Gain**

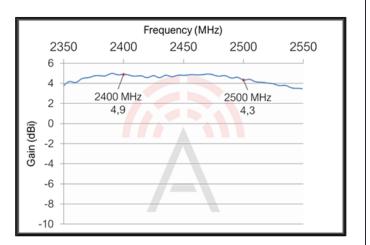





5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 11-01-22** 

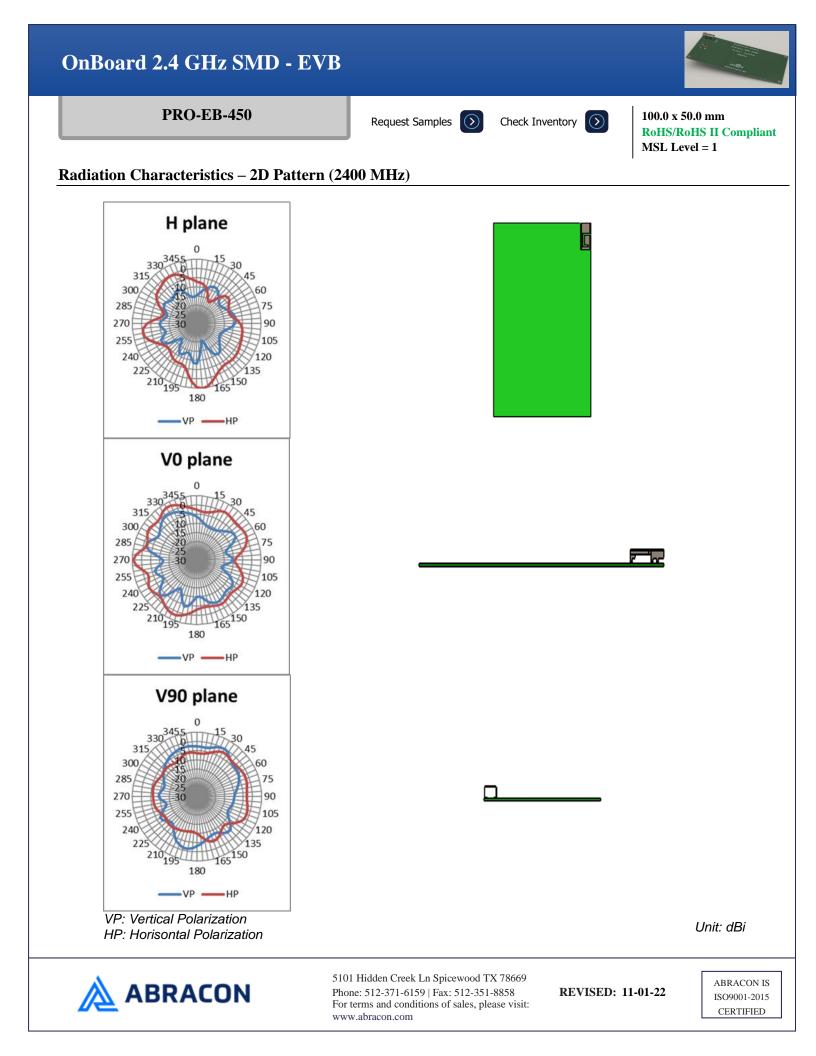

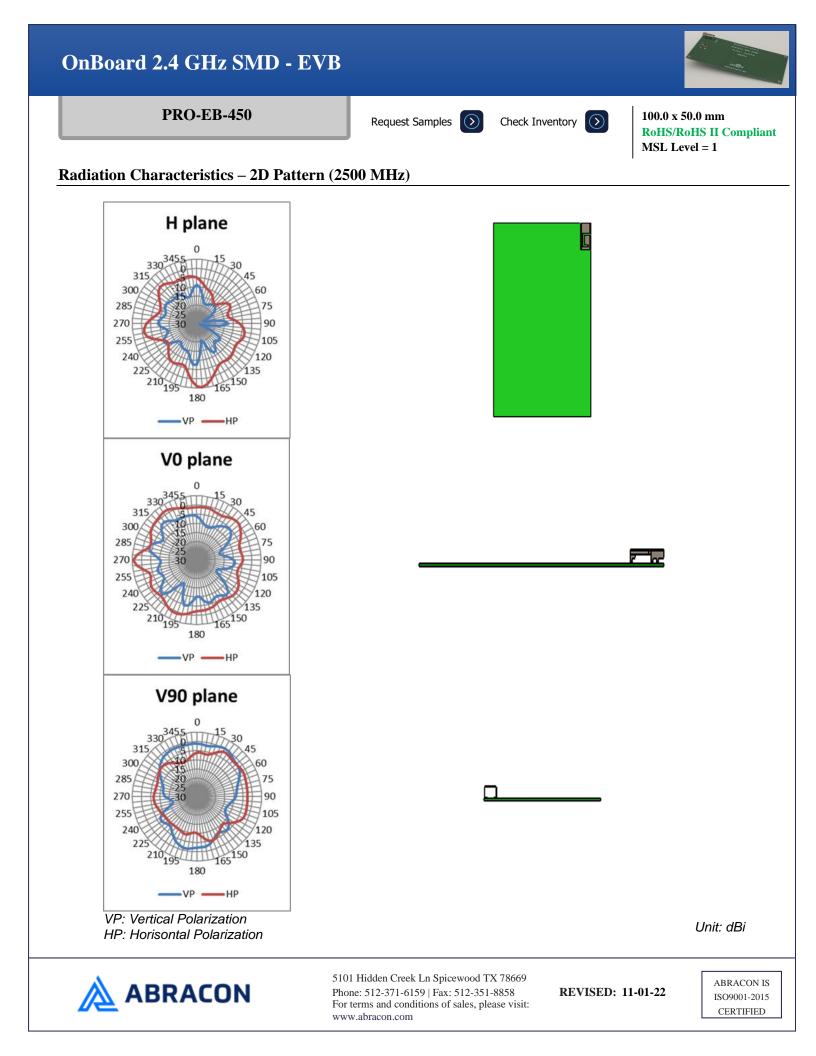

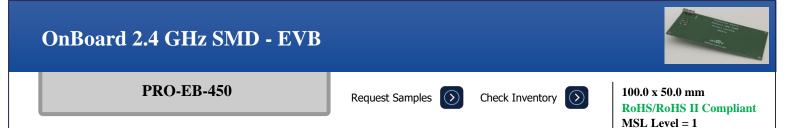


### **Evaluation Board Outline & Matching Circuit**

The evaluation board (PRO-EB-450) is developed to simplify antenna testing and evaluation. It has an arbitrary size of  $100 \times 50$  mm and includes an SMA connector. The purpose is to give a reference design for an optimal antenna implementation. The evaluation board can also be used to test other implementations by cutting and soldering the PCB into any device.



Evaluation board outline

The evaluation board has a matching circuit implemented next to the antenna. This is aimed to enable optimization possibilities for the user. The component positions are sized for 0402 (1005 metric) SMD components.

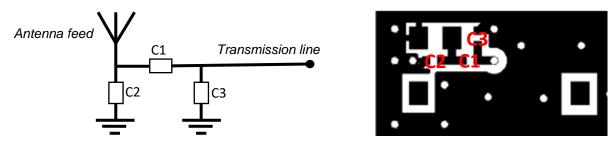

### Matching circuit

The antenna needs a matching circuit to adjust the resonant frequency balance. When delivered, the evaluation board is tuned for optimum balance at the 2.4 GHz frequency band. The components for this setup are (can be replaced by equivalent): C1 = 1.5 nH (LQW15AN1N5B00D) C2 = 0.5 pF (GRM1555C1HR50WA01D) C3 = N/A


However, it is common that the resonant frequency will shift during implementation in an arbitrary device. Therefore, this matching may be changed with other values/components/brands for compensation of such effects. This is further described in the General Implementation Guidelines section below.

Note: Overall Evaluation Board dimensions: 100 x 50 mm.




5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 11-01-22** 

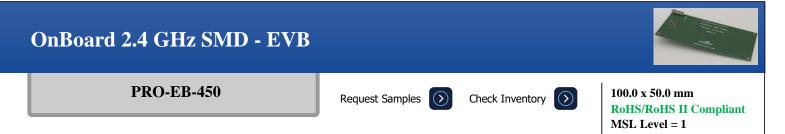

#### **General Implementation Guidelines**

The antenna can be positioned in different ways, although there are some positions which are more beneficial. Below picture shows a typical PCB with examples on different antenna positions. The optimal position is option 1 or 4.

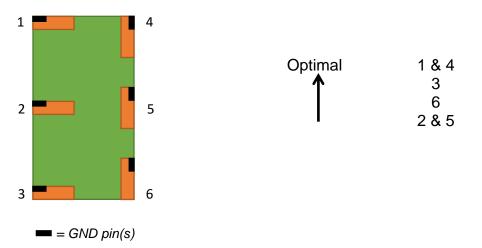

The antenna should be aligned with the PCB edge if possible, preferably with the GND pin(s) close to a corner.

The antenna enables that small electrical components are mounted inside the antenna keep-out block. This is a spaceefficient solution which has very little influence on the performance. It may have an impact on the antenna tuning, but is fully possible if there is limited space on the PCB.


Another general aspect on surface mounted antennas is regarding the PCB population. If other electrical components are positioned in the surrounding area of the antenna, some impact on the antenna tuning and radiated performance may be expected. It is recommended that such components are distributed below a topographical slope that starts on PCB level at the antenna keep-out block, and slowly increases the height.

It shall also be highlighted that plastic and metal parts in the near proximity of antennas may influence the antenna tuning and/or performance. This aspect should be noted as a general guideline for all antennas. The effects are difficult to estimate without detailed information, but it is common that a plastic housing above the antenna shifts the resonant frequency down. It is recommended to measure the antenna in the actual device after implementation.



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 11-01-22** 

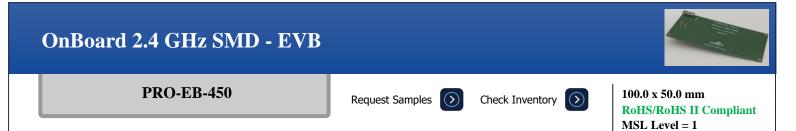

# Packaging

1 pcs/box.

## **Ordering Information**

Part number	Part name	Details
PRO-OB-440	OnBoard SMD 2400	Antenna for 2.4-2.5 GHz.
PRO-EB-450	Evaluation board, Onboard SMD	Evaluation board with PRO-OB-440
	2400	for 2.4 - 2.5 GHz (Wi-Fi/BT/BLE/Zigbee) applications.

ATTENTION: Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln Spicewood TX 78669 Phone: 512-371-6159 | Fax: 512-351-8858 For terms and conditions of sales, please visit: www.abracon.com

**REVISED: 11-01-22** 

# **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Antenna Development Tools category:

Click to view products by Abracon manufacturer:

Other Similar products are found below :

 PCSD.06.A
 1002427-02
 1004796-01
 YC0010AAEVB
 1001013-02
 1005454-01
 1004795-01
 1002436-01
 ACR1004A-EVB
 RAC0024 

 EVB
 RAC00245-EVB
 ACR1004GC-EVB
 W3012-K
 W3006-K
 SPD.25A
 74889100TB
 A10192-U1
 DTAD.01.A.50
 SR4C033-EVB-1

 AEK-LTE-CER
 IOT-K
 SR4W035-EVB-1
 W3010-K
 LORA-K
 ISM-K
 REFLECTOR-EVB-1
 ACAG0201-2450-EVB
 ACAG0301 

 15752450-EVB
 ACAG0301-1575-EVB
 ACAG0301-24505500-EVB
 ACAG0301-5500-EVB
 ACAG0801-2450-EVB
 ACAG1204-433-EVB

 ACAG1204-868-EVB
 ACAG1204-915-EVB
 ACAR0301-SW2-EVB
 ACAR3005-C2WB-EVB
 ACAR3005-S824-EVB
 ACAR3705-S698 

 EVB
 ACAR4008-S698-EVB
 ACR0301U-EVB
 ACR1504I3-EVB-A
 ACR1504I3-EVB-S
 ACR2005I4-EVB
 ACR4006X-EVB
 PRO-EB-450

 PRO-EB-453
 PRO-EB-472
 PRO-EB-550
 PRO-EB-550
 PRO-EB-450
 PRO-EB-472
 PRO-EB-550