


# WORLD FAMOUS ELECTRONICS LLC.



## PULSE SENSOR THE EASY TO USE HEART RATE SENSOR & KIT

### General Description

The Pulse Sensor is the original low-cost optical heart rate sensor (PPG) for Arduino and other microcontrollers. It's designed and made by World Famous Electronics, who actively maintains extensive open-source projects and code at: [www.pulsesensor.com](http://www.pulsesensor.com)

### Features

- Includes Kit accessories for high-quality sensor readings
- Designed for Plug and Play
- Small size and embeddable into wearables
- Works with any MCU with an ADC
- Works with 3 Volts or 5 Volts
- Well-documented Arduino library
- Certified Open Source



### Kit Includes

Protective Vinyl Cover, insulating the circuit from user's skin.

A Velcro Finger Strap, size to fit any user.

Velcro Dots, allowing for consistent surface pressure and high-fidelity readings.

Precisely Sized Ear Clip, allowing for different types of wearable applications.

### Product Photo:




## Pulse Sensor Optical Heart Rate Monitor

### Absolute Maximum Ratings


	Min	Typ	Max	Unit
Operating Temperature Range	-40		+85	°C
Input Voltage Range	3		5.5	V
Output Voltage Range	0.3	Vdd/2	Vdd	V
Supply Current	3		4	mA

### Physical Dimensions PCB inch(mm)

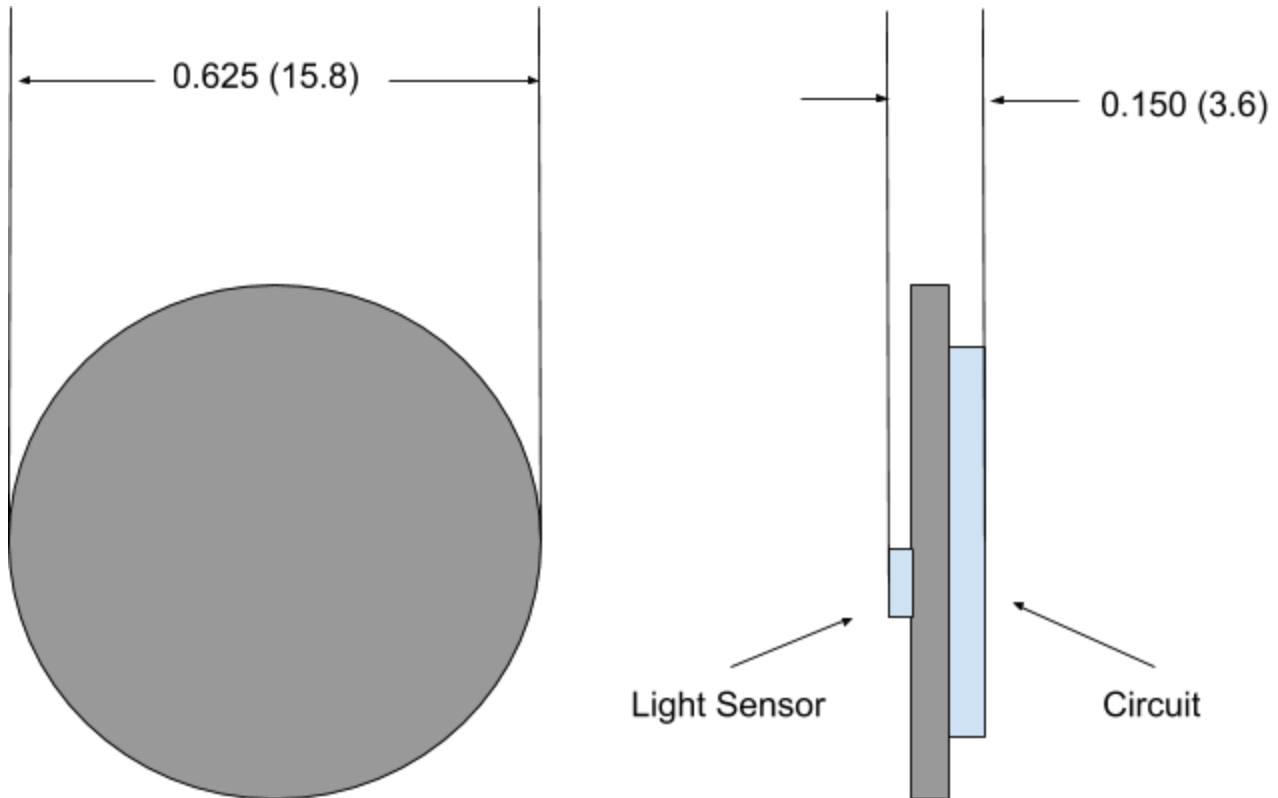

### Cable and Connection Details

- Length 24 inches (610 mm)
- 26 Gauge, Soft braided-wire
- PVC Insulation, Ribbon Style
- Male Header Termination
  - Black Wire = GND
  - Red Wire = Vdd
  - Purple Wire = Pulse Signal



Open Source Hardware Association Certification Number: US000075



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Multiple Function Sensor Development Tools](#) category:*

*Click to view products by [Adafruit](#) manufacturer:*

Other Similar products are found below :

[MAXWSNENV#](#) [STEVAL-MKIT01V1](#) [KT-O2-25%-TB200A-E](#) [KT-TVOC-200-TB200A](#) [KT-NmHc-200-TB200A](#) [SEN0344](#) [PIM520](#)  
[PIM518](#) [PIM519](#) [PIM502](#) [AS7022-EVALKIT](#) [ALTEHTG2SMIP](#) [MAX30101WING#](#) [OB1203SD-U-EVK](#) [MIKROE-4265](#) [A000070](#)  
[EV\\_ICG-20660L](#) [GX-F12A-P](#) [GX-F15A](#) [GX-F8AI-P](#) [GX-H15AI-P](#) [GX-H6A-P](#) [GX-HL15B-P](#) [1093](#) [MIKROE-2455](#) [MIKROE-2458](#)  
[MIKROE-2507](#) [MIKROE-2508](#) [MIKROE-2516](#) [MIKROE-2529](#) [1458](#) [MIKROE-1628](#) [176](#) [189](#) [1893](#) [2106](#) [ATQT4-XPRO](#) [GP30-DEMO](#)  
[MODULE](#) [GX-F12AI-P](#) [GX-F15A-P](#) [GX-FL15B-P](#) [GX-H12AI-P](#) [GX-H15A-P](#) [GX-H6AI-P](#) [GX-H8A-P](#) [GX-F15AI-P](#) [GX-FL15A-P](#) [AAS-](#)  
[AQS-UNO](#) [DFR0018](#) [DFR0131](#)