

AC VOLTAGE DETECTOR

MS8900

MS8900

VOLTAGE
AC 100V~240V




Features:

- ▶ Pocket Size
- ▶ Non-Contact Voltage Detector
- ▶ Sound and Light Instructions

EMC
LVD



Specifications		MS8900
Specifications		
Measurement Methods	Non-Contact	
Voltage Sensitivity	100 to 240V AC	
Voltage Range	100V~600V	
Detecting Distance	<5mm	
Frequency	50Hz~60Hz	
Operating Temperature	32 to 122°F (0 to 50°C)	
Operating Humidity	<85%RH	
General		
Power Supply	2x1.5V AAA Batteries	
Product Size	148mm×25mm×20mm/5.8"×0.98"×0.78"	
Product Weight	26g/0.06lb	
Safety Rating	CE ETL CAT.III 600V RoHS	

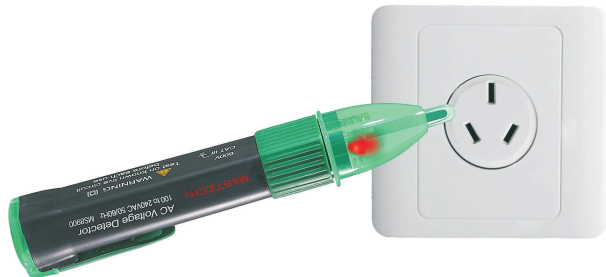

SMART SMD TESTER

MS8910

Features:

- ▶ Auto Scanning to Test Resistance, Capacitance, Continuity and Diode
- ▶ Auto Power Off
- ▶ Low Battery Indicator

EMC



Specifications			MS8910
Specifications			
Resistance	Range	3000Ω/3KΩ/30KΩ/300KΩ/3MΩ/30MΩ	Accuracy ±(1.0%+2)
Capacitance		3nF/30nF/300nF/3μF/30μF	±(2.5%+3)
		300μF/3mF/30mF	
Features			
Display		3000 counts	
Auto Ranging		●	
Manual Ranging		●	
Auto Scanning		●	
Auto Power Off		●	
Diode		2.7V	
Continuity Buzzer		<50Ω	
Low Battery Display		●	
General			
Power Supply		1x3V CR2032 Battery	
Product Size		175mm×32mm×20mm/6.89"×1.26"×0.79"	
Product Weight		46g/0.10lb	
Certificate		CE RoHS	



MS8910



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Adafruit Accessories](#) category:

Click to view products by [Adafruit](#) manufacturer:

Other Similar products are found below :

[3209](#) [3561](#) [3560](#) [3562](#) [2503](#) [3011](#) [3048](#) [2973](#) [2868](#) [2958](#) [2836](#) [2968](#) [3610](#) [3568](#) [3551](#) [2858](#) [3353](#) [3584](#) [3484](#) [2865](#) [3556](#) [3559](#) [3262](#)
[3348](#) [2499](#) [2878](#) [2963](#) [3219](#) [3005](#) [2882](#) [PGM1202](#) [02-LDR1](#) [02-LDR12](#) [02-LDR13](#) [02-LDR14](#) [02-LDR15](#) [02-LDR2](#) [02-LDR3](#) [02-LDR4](#)
[2194](#) [862](#) [460](#) [905](#) [02-LDR20](#) [02-LDR21](#) [02-LDR22](#) [02-LDR23](#) [1008](#) [1020](#) [1031](#)