

# NPN SILICON RF POWER TRANSISTOR

## DESCRIPTION:


The **ASI BLV32F** is Designed for in linear v.h.f. amplifiers of television transmitters and transporters.

## FEATURES:

- Diffused emitter ballasting resistors
- $P_G = 16$  dB at 10 W/224 MHz
- **Omnigold™** Metalization System

## MAXIMUM RATINGS

$I_C$	4.0 A
$V_{CBO}$	60 V
$V_{CEO}$	32 V
$V_{CES}$	60 V
$V_{EBO}$	4.0 V
$P_{DISS}$	82 W @ $T_C = 25^\circ\text{C}$
$T_J$	-65 $^\circ\text{C}$ to +200 $^\circ\text{C}$
$T_{STG}$	-65 $^\circ\text{C}$ to +150 $^\circ\text{C}$
$\theta_{JC}$	2.1 $^\circ\text{C}/\text{W}$

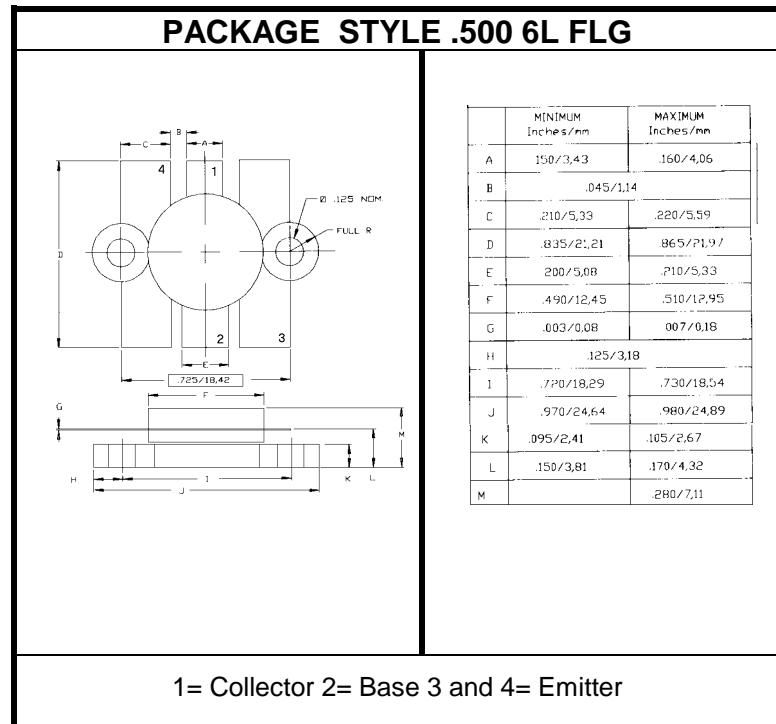

## CHARACTERISTICS $T_C = 25^\circ\text{C}$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
$BV_{CEO}$	$I_C = 100$ mA	32			V
$BV_{CES}$	$I_C = 15$ mA	60			V
$BV_{EBO}$	$I_E = 10$ mA	4.0			V
$I_{CES}$	$V_{CE} = 32$ V			5.0	mA
$h_{FE}$	$V_{CE} = 25$ V $I_C = 1.6$ A	20		120	---
$C_C$	$V_{CB} = 25$ V $f = 1.0$ MHz		50		pF
$P_G$	$V_{CE} = 25$ V $P_{OUT} = 10$ W $f = 224$ MHz	16			dB

ADVANCED SEMICONDUCTOR, INC.

7525 ETHEL AVENUE • NORTH HOLLYWOOD, CA 91605 • (818) 982-1200 • FAX (818) 765-3004

REV. A

1/1

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for RF Bipolar Transistors category:***

***Click to view products by Advanced Semiconductor manufacturer:***

Other Similar products are found below :

[MAPRST0912-50](#) [MCH4016-TL-H](#) [MMBT5551-G](#) [MRF10120](#) [15GN01CA-TB-E](#) [PH1214-25M](#) [MAPRST0912-350](#) [MMBTH10-TP](#) [BFP640F](#) [H6327](#) [BFP](#) [720F](#) [H6327](#) [BFP](#) [740F](#) [H6327](#) [BFR](#) [360F](#) [H6765](#) [MRF10031](#) [NSVF4009SG4T1G](#) [BFP](#) [182R](#) [E7764](#) [BFP405H6740XTSA1](#) [MRF10350](#) [BFR360FH6765XTSA1](#) [BFP410H6327XTSA1](#) [BFP620FH7764XTSA1](#) [BFP720ESDH6327XTSA1](#) [BFP720FH6327XTSA1](#) [BFR360L3E6765XTMA1](#) [BFP420H6433XTMA1](#) [BFP420H6740XTSA1](#) [BFP420H6801XTSA1](#) [MCH4015-TL-H](#) [BF888H6327XTSA1](#) [MMBT2222A-G](#) [BFP196WH6327XTSA1](#) [BFP405FH6327XTSA1](#) [BFP640ESDH6327XTSA1](#) [BFR193L3E6327XTMA1](#) [BFS483H6327XTSA1](#) [NSVF4020SG4T1G](#) [NSVF6003SB6T1G](#) [MRF10005](#) [BFP420FH6327XTSA1](#) [BFP740FESDH6327XTSA1](#) [BFR181E6327HTSA1](#) [BFR181WH6327XTSA1](#) [BFR182E6327HTSA1](#) [BFR193E6327HTSA1](#) [BFP181E7764HTSA1](#) [BFP183WH6327XTSA1](#) [BFP720H6327XTSA1](#) [BFR182WH6327XTSA1](#) [BFU590GX](#) [MAPR-000912-500S00](#) [BFR340FH6327XTSA1](#)