

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:

The **ASI MRF426** is Designed for high gain amplifier applications up to 30 MHz.

FEATURES:

- $P_G = 22$ dB min. at 25 W/30 MHz
- $IMD_3 = -30$ dBc max. at 25 W_(PEP)
- **Omnigold™** Metalization System
- Available as matched pairs.

MAXIMUM RATINGS

I_C	3.0 A
V_{CBO}	65 V
V_{CEO}	35 V
V_{EBO}	4.0 V
P_{DISS}	70 W @ $T_C = 25$ °C
T_J	-65 °C to +200 °C
T_{STG}	-65 °C to +150 °C
θ_{JC}	2.5 °C/W

PACKAGE STYLE .380 4L FLG

DIM	MINIMUM inches / mm	MAXIMUM inches / mm
A	.220 / 5.59	.230 / 5.84
B	.785 / 19.94	
C	.720 / 18.29	.730 / 18.54
D	.970 / 24.64	.980 / 24.89
E		.385 / 9.78
F	.004 / 0.10	.006 / 0.15
G	.085 / 2.16	.105 / 2.67
H	.160 / 4.06	.180 / 4.57
I		.280 / 7.11
J	.240 / 6.10	.255 / 6.48

CHARACTERISTICS $T_C = 25$ °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CBO}	$I_C = 50$ mA	65			V
BV_{CEO}	$I_C = 50$ mA	35			V
BV_{EBO}	$I_E = 10$ mA	4.0			V
I_{CES}	$V_{CE} = 28$ V			10	mA
h_{FE}	$V_{CE} = 5.0$ V $I_C = 1.0$ A	10		200	---
C_{OB}	$V_{CB} = 30$ V $f = 1.0$ MHz			80	pF
G_P	$V_{CE} = 28$ V $P_{OUT} = 25$ W _(PEP) $f = 30$ MHz	22			dB
η_C		35			%
IMD_3				-30	dBc

FIGURE 2 – OUTPUT POWER versus INPUT POWER

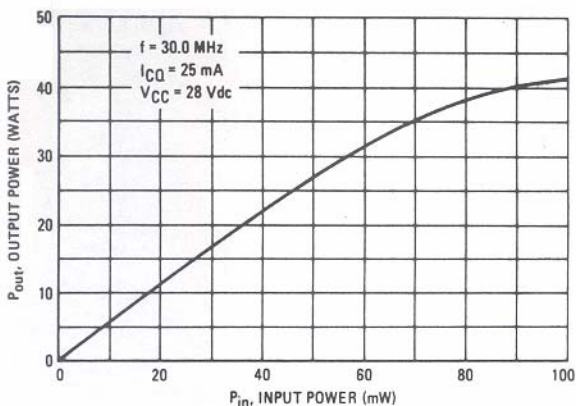


FIGURE 3 – OUTPUT POWER versus SUPPLY VOLTAGE

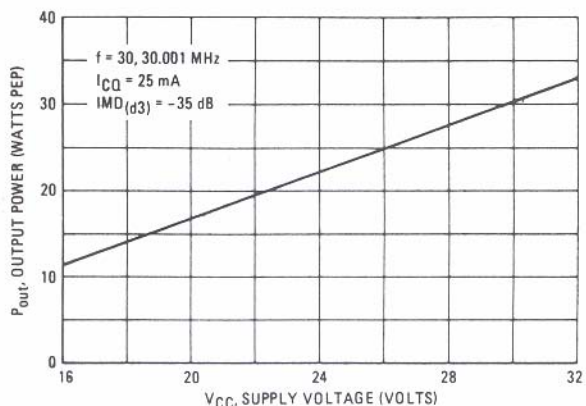


FIGURE 4 – POWER GAIN versus FREQUENCY

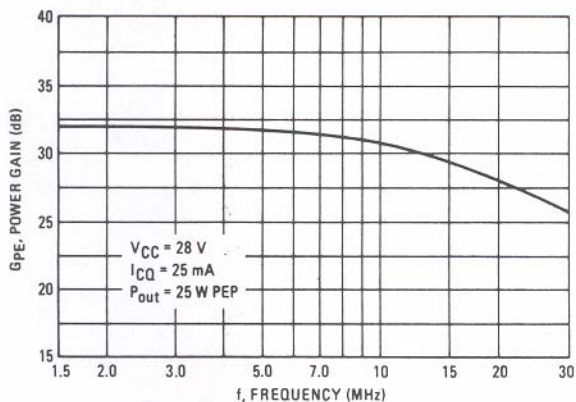


FIGURE 5 – INTERMODULATION DISTORTION versus OUTPUT POWER


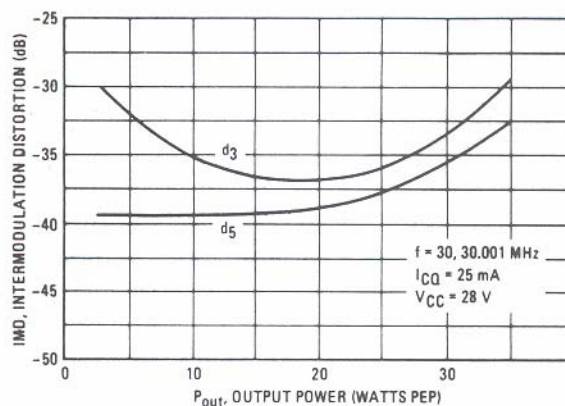


FIGURE 6 – DC SAFE OPERATING AREA

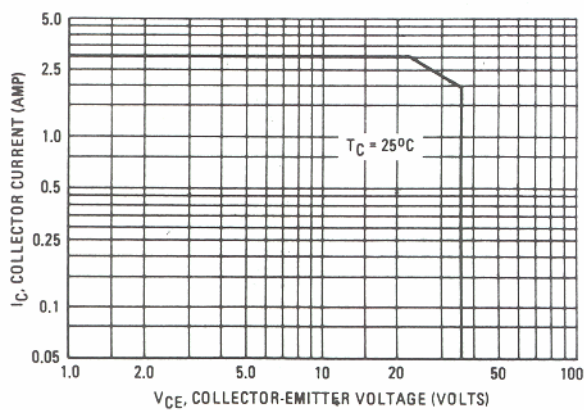

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF MOSFET Transistors](#) category:

Click to view products by [Advanced Semiconductor](#) manufacturer:

Other Similar products are found below :

[MRF492](#) [MRFE8VP8600HR5](#) [ARF1511](#) [ARF465BG](#) [BF 2030 E6814](#) [BLF861A](#) [MRF150J](#) [DU1215S](#) [DU28200M](#) [UF28100M](#) [DU2820S](#)
[MHT1008NT1](#) [MMRF1014NT1](#) [MRF426](#) [ARF468BG](#) [MAPHST0045](#) [MRFE6VP61K25NR6](#) [DU2860U](#) [VRF152GMP](#) [MRFE6VP5300NR1](#)
[BF2040E6814HTSA1](#) [MRFE6VP5150GNR1](#) [LET9060S](#) [MRF136Y](#) [BF999E6327HTSA1](#) [SD2931-12MR](#) [BF998E6327HTSA1](#)
[AFV10700HR5](#) [MRF141](#) [MRF171](#) [MRF172](#) [MRF174](#) [QPD1020SR](#) [BF 1005S E6327](#) [MRF134](#) [MRF136](#) [MRF137](#) [MRF141G](#) [MRF151](#)
[MRF151A](#) [MRF151G](#) [MRF157](#) [MRF158](#) [MRF160](#) [MRF171A](#) [MRF173](#) [MRF177](#) [UF2840G](#) [TGF3021-SM](#) [ARF1510](#)