

# NPN SILICON RF POWER TRANSISTOR

## DESCRIPTION:


The **ASI MRF464** is Designed for 28 Volt Power Amplifier Applications up to 30 MHz.

## FEATURES INCLUDE:

- $P_G = 15$  dB Min. @ 30MHz & 80W
- Common Emitter

## MAXIMUM RATINGS

$I_C$	10 A
$V_{CB}$	65 V
$V_{CE}$	35 V
$V_{EB}$	2.5 V
$P_{DISS}$	250 W @ $T_C = 25^\circ\text{C}$
$T_J$	-65 °C to +200 °C
$T_{STG}$	-65 °C to +150 °C
$\theta_{JC}$	0.7 °C/W

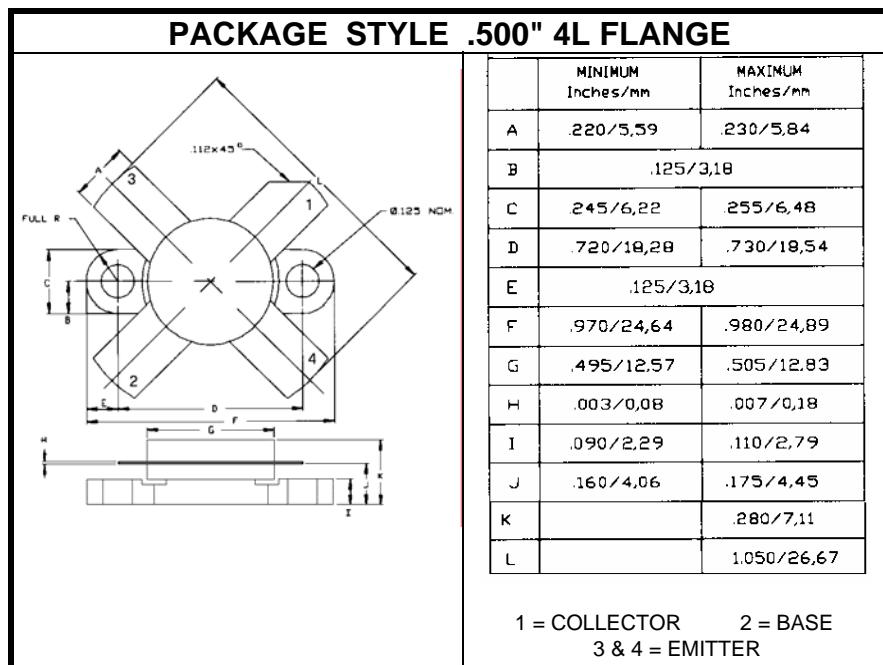

## CHARACTERISTICS $T_C = 25^\circ\text{C}$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
$BV_{CES}$	$I_C = 100$ mA	65			V
$BV_{CEO}$	$I_C = 100$ mA	35			V
$BV_{EBO}$	$I_E = 10$ mA	2.5			V
$I_{CES}$	$V_{CE} = 28$ V			10	mA
$h_{FE}$	$V_{CE} = 5.0$ V $I_C = 5.0$ A	10		200	---
$C_{OB}$	$V_{CB} = 28$ V			200	pF
$G_{PE}$ $\eta_c$	$V_{CC} = 28$ V $f = 30.000$ & $30.001$ MHz $P_{OUT} = 80$ W(PEP)	15 40			dB %

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for RF Bipolar Transistors category:***

***Click to view products by Advanced Semiconductor manufacturer:***

Other Similar products are found below :

[MAPRST0912-50](#) [MCH4016-TL-H](#) [MMBT5551-G](#) [MRF10120](#) [15GN01CA-TB-E](#) [PH1214-25M](#) [MAPRST0912-350](#) [MMBTH10-TP](#) [BFP640F](#) [H6327](#) [BFP](#) [720F](#) [H6327](#) [BFP](#) [740F](#) [H6327](#) [BFR](#) [360F](#) [H6765](#) [MRF10031](#) [NSVF4009SG4T1G](#) [BFP](#) [182R](#) [E7764](#) [BFP405H6740XTSA1](#) [MRF10350](#) [BFR360FH6765XTSA1](#) [BFP410H6327XTSA1](#) [BFP620FH7764XTSA1](#) [BFP720ESDH6327XTSA1](#) [BFP720FH6327XTSA1](#) [BFR360L3E6765XTMA1](#) [BFP420H6433XTMA1](#) [BFP420H6740XTSA1](#) [BFP420H6801XTSA1](#) [MCH4015-TL-H](#) [BF888H6327XTSA1](#) [MMBT2222A-G](#) [BFP196WH6327XTSA1](#) [BFP405FH6327XTSA1](#) [BFP640ESDH6327XTSA1](#) [BFR193L3E6327XTMA1](#) [BFS483H6327XTSA1](#) [NSVF4020SG4T1G](#) [NSVF6003SB6T1G](#) [MRF10005](#) [BFP420FH6327XTSA1](#) [BFP740FESDH6327XTSA1](#) [BFR181E6327HTSA1](#) [BFR181WH6327XTSA1](#) [BFR182E6327HTSA1](#) [BFR193E6327HTSA1](#) [BFP181E7764HTSA1](#) [BFP183WH6327XTSA1](#) [BFP720H6327XTSA1](#) [BFR182WH6327XTSA1](#) [BFU590GX](#) [MAPR-000912-500S00](#) [BFR340FH6327XTSA1](#)