

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:


The **ASI MRF652S** is Designed for UHF large signal, amplifier Applications in FM equipment up to 512 MHz.

FEATURES:

- Common Emitter
- $P_G = 10 \text{ dB}$ at $5.0 \text{ W}/512 \text{ MHz}$
- **Omnigold™** Metalization System

MAXIMUM RATINGS

I_C	2.0 A
V_{CBO}	36 V
V_{CER}	16 V
V_{EBO}	4.0 V
P_{DISS}	25 W @ $T_C = 25 \text{ }^\circ\text{C}$
T_J	-65 $^\circ\text{C}$ to +200 $^\circ\text{C}$
T_{STG}	-65 $^\circ\text{C}$ to +150 $^\circ\text{C}$
θ_{JC}	200 $^\circ\text{C}/\text{W}$

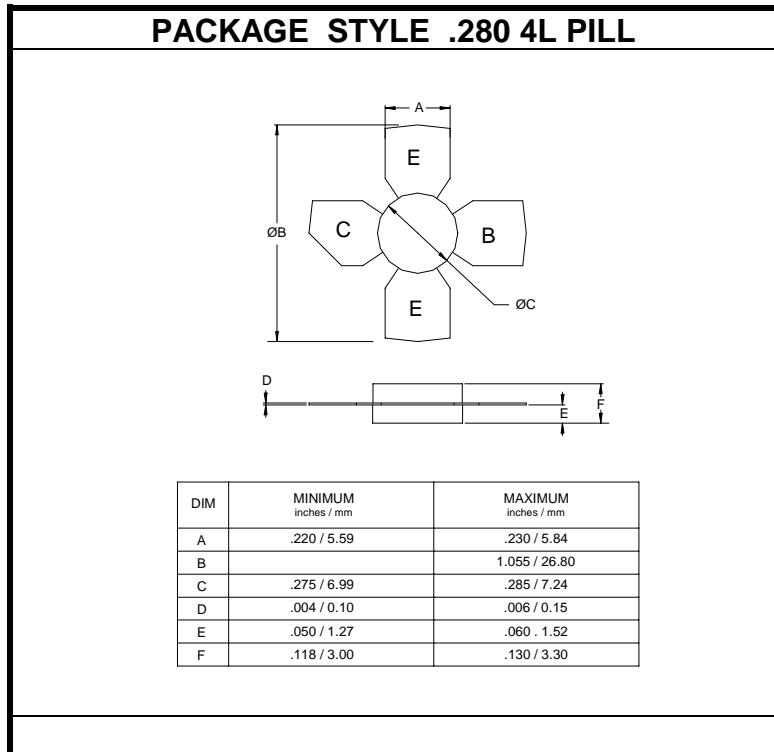

CHARACTERISTICS $T_C = 25 \text{ }^\circ\text{C}$

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CEO}	$I_C = 25 \text{ mA}$	16			V
BV_{CES}	$I_C = 25 \text{ mA}$	36			V
BV_{CBO}	$I_C = 25 \text{ mA}$	36			V
BV_{EBO}	$I_E = 5.0 \text{ mA}$	4.0			V
I_{CES}	$V_{CE} = 15 \text{ V}$			1.0	mA
h_{FE}	$V_{CE} = 5.0 \text{ V}$ $I_C = 200 \text{ mA}$	10		150	---
C_{ob}	$V_{CB} = 15 \text{ V}$ $f = 1.0 \text{ MHz}$		9.5	15	pF
P_G η_c	$V_{CC} = 12.5 \text{ V}$ $P_{OUT} = 5.0 \text{ W}$ $f = 512 \text{ MHz}$	10 60	11 65		dB %

ADVANCED SEMICONDUCTOR, INC.

7525 ETHEL AVENUE • NORTH HOLLYWOOD, CA 91605 • (818) 982-1200 • FAX (818) 765-3004

REV. B

1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for RF Bipolar Transistors category:

Click to view products by Advanced Semiconductor manufacturer:

Other Similar products are found below :

[MAPRST0912-50](#) [MCH4016-TL-H](#) [MMBT5551-G](#) [MRF10120](#) [15GN01CA-TB-E](#) [PH1214-25M](#) [MAPRST0912-350](#) [MMBTH10-TP](#) [BFP640F](#) [H6327](#) [BFP](#) [720F](#) [H6327](#) [BFP](#) [740F](#) [H6327](#) [BFR](#) [360F](#) [H6765](#) [MRF10031](#) [NSVF4009SG4T1G](#) [BFP](#) [182R](#) [E7764](#) [BFP405H6740XTSA1](#) [MRF10350](#) [BFR360FH6765XTSA1](#) [BFP410H6327XTSA1](#) [BFP620FH7764XTSA1](#) [BFP720ESDH6327XTSA1](#) [BFP720FH6327XTSA1](#) [BFR360L3E6765XTMA1](#) [BFP420H6433XTMA1](#) [BFP420H6740XTSA1](#) [BFP420H6801XTSA1](#) [MCH4015-TL-H](#) [BF888H6327XTSA1](#) [MMBT2222A-G](#) [BFP196WH6327XTSA1](#) [BFP405FH6327XTSA1](#) [BFP640ESDH6327XTSA1](#) [BFR193L3E6327XTMA1](#) [BFS483H6327XTSA1](#) [NSVF4020SG4T1G](#) [NSVF6003SB6T1G](#) [MRF10005](#) [BFP420FH6327XTSA1](#) [BFP740FESDH6327XTSA1](#) [BFR181E6327HTSA1](#) [BFR181WH6327XTSA1](#) [BFR182E6327HTSA1](#) [BFR193E6327HTSA1](#) [BFP181E7764HTSA1](#) [BFP183WH6327XTSA1](#) [BFP720H6327XTSA1](#) [BFR182WH6327XTSA1](#) [BFU590GX](#) [MAPR-000912-500S00](#) [BFR340FH6327XTSA1](#)