


# IDK-1108

## 8.4" SVGA Industrial Display kit with Touch Solution

NEW

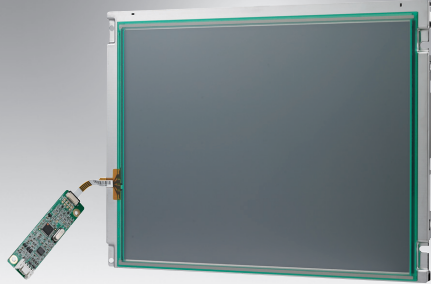

### Features

- 8.4" LCD supports 800 x 600 pixels and wide operating temperature (-10 ~ 60° C)
- Brightness of 450 cd/m<sup>2</sup> with LED backlight
- 4-wire resistive touch solution
- High contrast ratio of 600:1
- High uniformity of 85%
- LVDS signal interface
- Low power consumption 2.94 W (panel only)
- LED driver board built in
- Touch controller included (USB)
- AR surface treatment (optional)
- Optical bonding (optional)

### Introduction


The Advantech IDK-1108 series comes with a 8.4" industrial grade LCD display with 4-wire resistive touch. The series is also available with flexible options for LCD screens enhanced treatment such as Anti-Reflection surface treatment and optical bonding solution. IDK-1108 series supports 4-wire resistive touch with low power consumption at the maximum of 2.94 W. IDK-1108 series is ideal for embedded applications which customers have maximum flexibility for mechanical design.

### Specifications

LCD Panel	Display Size	8.4" LED backlight panel
	Resolution	800 x 600
	Viewing Angle (U/D/L/R)	80° / 60° / 80° / 80°
	Brightness	450 cd/m <sup>2</sup>
	Backlight Life (hrs)	50,000hrs
	Contrast Ratio	600 : 1
	Response Time (ms)	30 ms
	Colors	6 Bit (262K)/8 bit (16.2 M)
	Voltage	3.3 V Power
	Consumption	2.94 W
	Signal Interface	1 channel LVDS
	Weight	250 g
	Dimensions (W x H x D)	203 x 142.6 x 10.3 mm
Touch Screen	Touch Screen	4-wire Resistive
	Transparency	82.5± 2.5%
	Surface Hardness	3H
	Durability	1 million times
Environment	Operating Temperature	-10 ~ 70° C
	Storage Temperature	-30 ~ 70° C
	Humidity	90% @ Max. 39° C, non-condensing

## Dimensions

Unit: mm

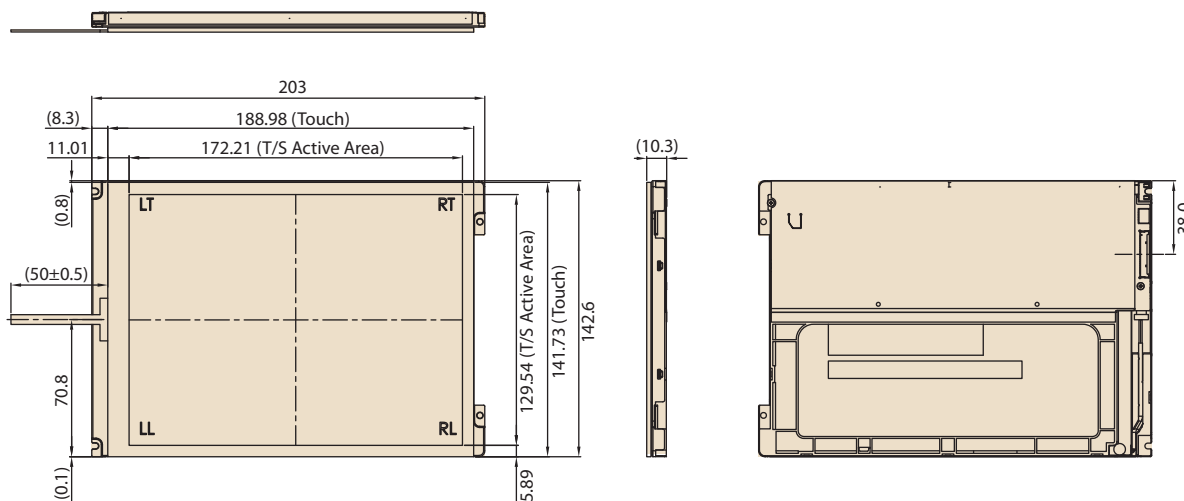

## Ordering Information

Part No.	Size	Brightness (cd/m <sup>2</sup> )	Interface	Touch screen	Touch Interface
IDK-1108R-45SVA1E	8.4"	450	LVDS	4-wire Resistive	USB

## Packing List

Part Number	Description
ETM-RES05C-EEH4EE	1 x 4-wire USB Touch controller
1700020324-01	1x USB Touch cable 5P-2.0/USB-A (M) 180CM
2066110000	1 x CD-ROM for User manual and touch driver

Note: Package contents are subject to change without prior notice

## Optional Order

SBC Part No.	LVDS Cable Part No.	Display Interface	B/L Cable Part No	Touch Interface	Touch Power Input
MIO-5270	96CB-L2040PAB4	LVDS: Single channel 18bit (SVGA)	96CB-E0405PIB3 (12V: PWM)	USB	5 V
PCM-9362	96CB-L2020PAB2	LVDS: Single channel 18bit (SVGA)	96CB-E0405PIB3 (12V: PWM)	USB	5 V
AIMB-270	96CB-L2040PAB4	LVDS: Single channel 18bit (SVGA)	96CB-E0405PIB3 (12V: PWM)	USB	5 V

For more compatible embedded board solution, please visit our Build Your display web page as bellow  
<http://www.advantech.com/buildyourdisplay>

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Display Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[P6153-PR](#) [TDP0700T800480PCAP](#) [P6171DPR-DC-RS](#) [P6171DPR-DC-U](#) [MIKROMEDIA 4 FOR STM32F4 CAPACITIVE FPI](#)  
[MIKROMEDIA 3 FOR STM32F4 CAPACITIVE FPI](#) [TN0216ANVNANN-GN00](#) [TN0104ANVAANN-GN00](#) [TN0181ANVNANN-GN00](#)  
[MIKROMEDIA 5 FOR TIVA CAPACITIVE](#) [MIKROMEDIA 4 FOR TIVA CAPACITIVE](#) [MIKROMEDIA 4 FOR PIC32MZ CAPACITIVE](#)  
[RVT43ULFNWC03 V4](#) [SM-RVT101HVBFWCA0](#) [SM-RVT101HVBNWCA0](#) [SM-RVT35HHBFWCA0](#) [SM-RVT35HHBNWCA0](#) [SM-](#)  
[RVT43HLBFWCA0](#) [SM-RVT43HLBNWCA0](#) [SM-RVT50HQBNWCA0](#) [SM-RVT70HSBFWCA0](#) [SM-RVT70HSBNWCA0](#) [PIM579](#)  
[1215686](#) [PIM543](#) [DFR0678](#) [P6191PR-DC-U-V3](#) [16381](#) [17916](#) [18205](#) [21229](#) [18625](#) [12885](#) [19885](#) [11769](#) [MIKROMEDIA FOR DSPIC33](#)  
[MIKROMEDIA FOR PIC24](#) [MIKROMEDIA FOR PIC32](#) [MIKROMEDIA FOR STELLARIS M3](#) [MIKROMEDIA HMI 3.5 RES](#)  
[MIKROMEDIA HMI 5](#) [MIKROMEDIA PLUS FOR FT90X](#) [MIKROMEDIA PLUS FOR PIC32MX7 SHIELD](#) [MIKROMEDIA PROTO](#)  
[SHIELD](#) [14628](#) [MIKROMEDIA 5 FOR TIVA](#) [MIKROMEDIA 5 FOR TIVA SHIELD](#) [MIKROMEDIA 7 FOR STM32F4](#) [MIKROMEDIA](#)  
[CONNECT SHIELD](#) [MIKROMEDIA FOR ARM](#)