

TO-92 Plastic-Encapsulate Transistors


S9015C331 PNP Transistors

Features

- High Total Power Dissipation ($P_C = 0.45W$)
- High h_{FE} and Good Linearity
- Complementary to S9014

Maximum Ratings ($T_a=25^\circ C$ unless otherwise noted)









Symbol	Parameter	Value	Unit
V_{CB0}	Collector Base Voltage	-50	V
V_{CEO}	Collector Emitter Voltage	-45	V
V_{EBO}	Emitter Base Voltage	-5	V
I_C	Collector Current	-0.1	A
P_C	Collector Power Dissipation	450	mW
T_j	Junction Temperature	150	$^\circ C$
T_{stg}	Storage Temperature	-55 ~ +150	$^\circ C$

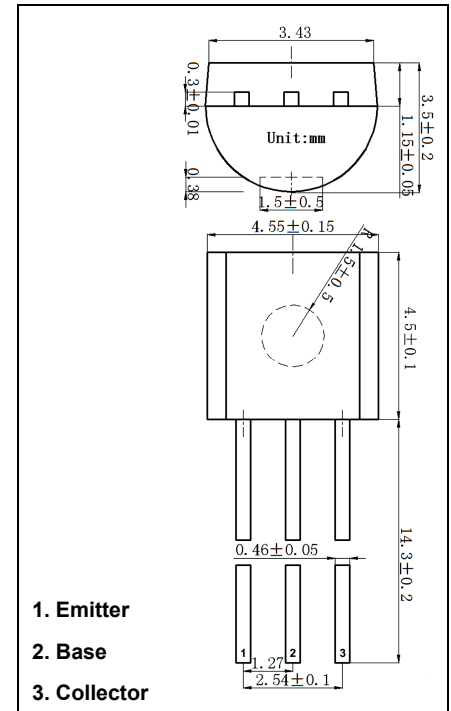

Electrical Characteristics ($T_a=25^\circ C$ unless otherwise specified)

Symbol	Parameter	Test Conditions	Min	Typ	Max	Unit
$V_{(BR)CB0}$	Collector-base breakdown voltage	$I_C = -100\mu A, I_E = 0$	-50			V
$V_{(BR)CEO}$	Collector-emitter breakdown voltage	$I_C = -1mA, I_B = 0$	-45			V
$V_{(BR)EBO}$	Emitter-base breakdown voltage	$I_E = -100\mu A, I_C = 0$	-5			V
I_{CB0}	Collector cut-off current	$V_{CB} = -50V, I_E = 0$			-50	nA
I_{EBO}	Emitter cut-off current	$V_{EB} = -5V, I_C = 0$			-50	nA
$h_{FE(1)}$	DC current gain	$V_{CE} = -5V, I_C = -1mA$	200		300	
$h_{FE(2)}$		$V_{CE} = -5V, I_C = -10mA$	90			
$h_{FE(3)}$		$V_{CE} = -5V, I_C = -50mA$	50			
$V_{CE(sat)}$	Collector-emitter saturation voltage	$I_C = -100mA, I_B = -10mA$			-0.3	V
$V_{BE(sat)}$	Base-emitter saturation voltage	$I_C = -100mA, I_B = -10mA$			-1.0	V
f_T	Transition frequency	$V_{CE} = -5V, I_C = -10mA, f = 30MHz$	100			MHz

Typical Characteristics

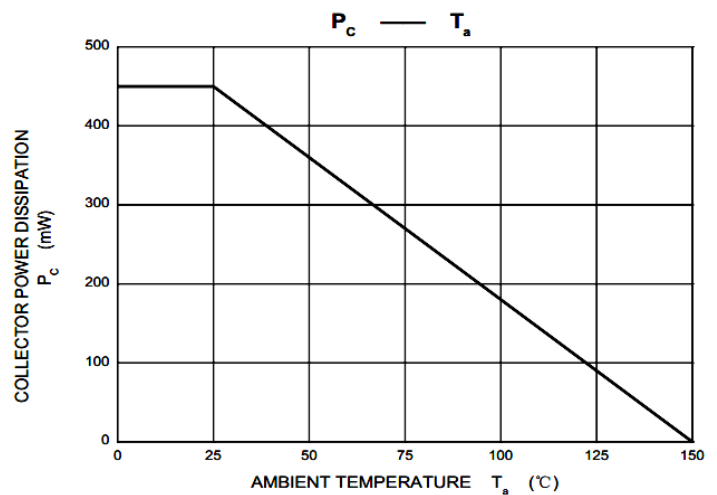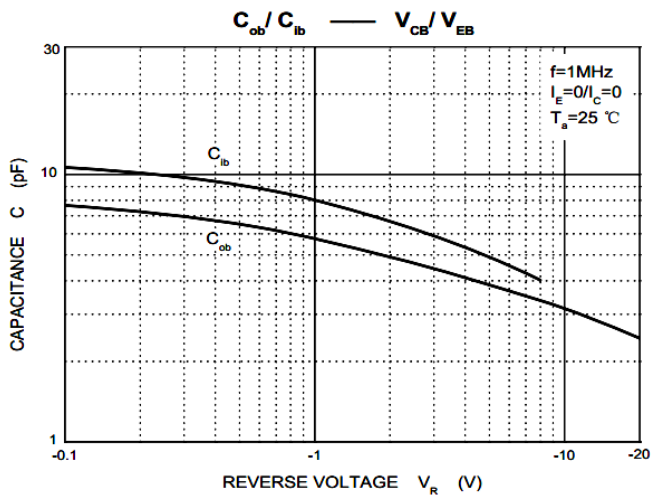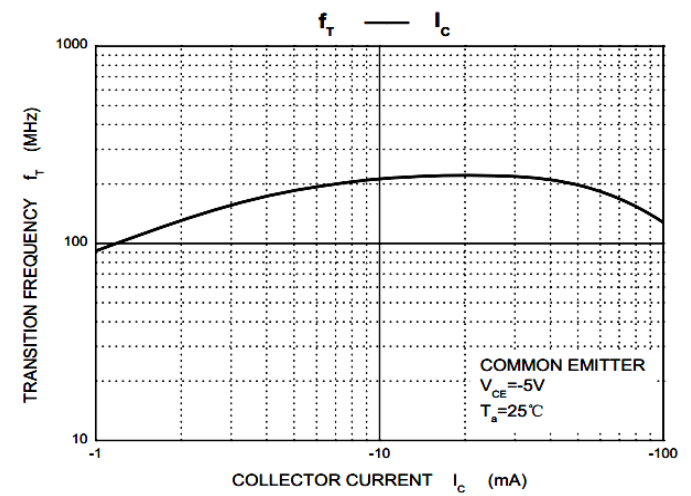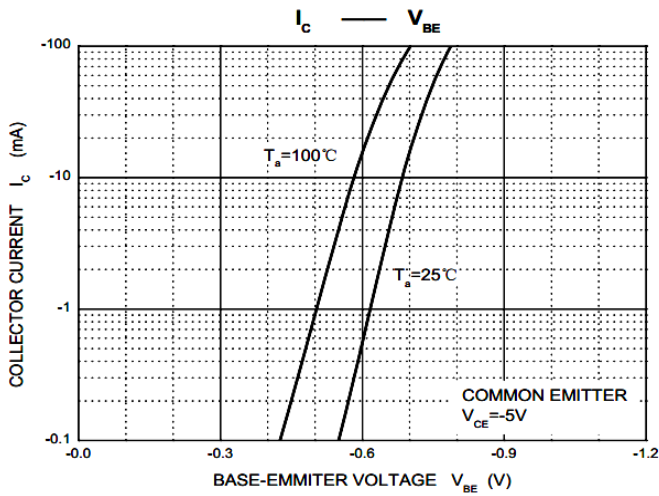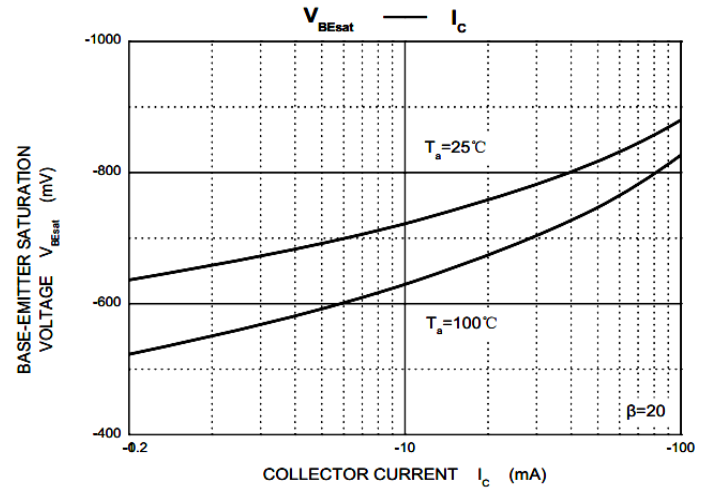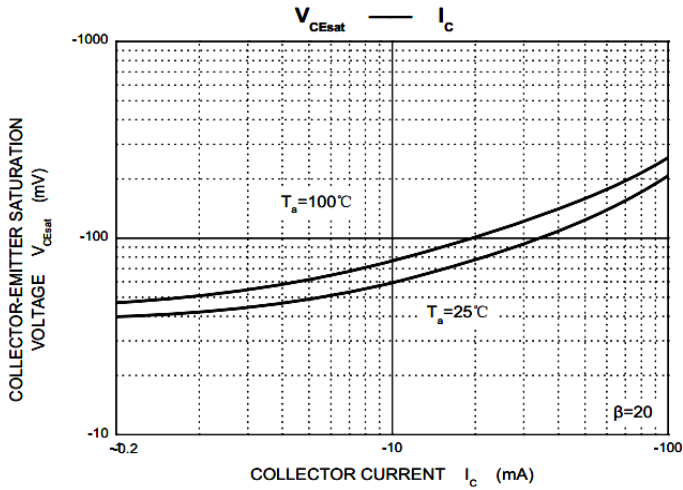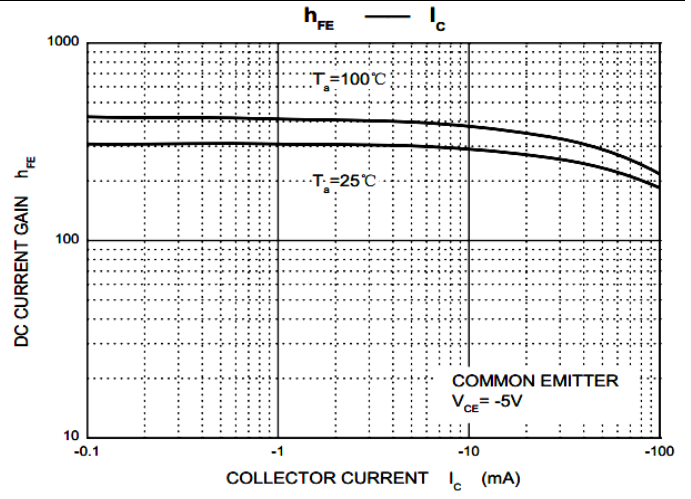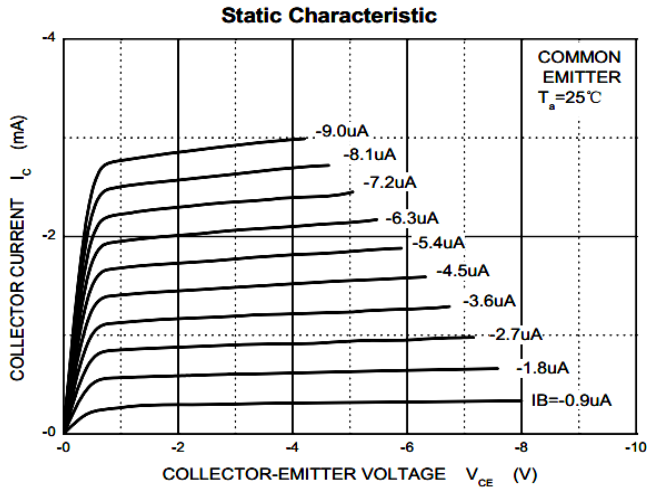

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Bipolar Transistors - BJT category](#):

Click to view products by [ALJ manufacturer](#):

Other Similar products are found below :

[BC559C](#) [MCH4017-TL-H](#) [MMBT-2369-TR](#) [BC546/116](#) [NJVMJD148T4G](#) [NTE16](#) [NTE195A](#) [IMX9T110](#) [2N4401-A](#) [2N6728](#) [2SA1419T-TD-H](#) [2SB1204S-TL-E](#) [2SC5488A-TL-H](#) [FMC5AT148](#) [2N2369ADCSM](#) [2N2907A](#) [2N3904-NS](#) [2N5769](#) [2SC4618TLN](#) [CPH6501-TL-E](#) [BC856BW-13-F](#) [US6T6TR](#) [BAX18/A52R](#) [BC556/112](#) [IMZ2AT108](#) [MMST8098T146](#) [MCH6102-TL-E](#) [2N3879](#) [30A02MH-TL-E](#) [NTE13](#) [NTE282](#) [NTE323](#) [NTE350](#) [NTE81](#) [JANTX2N2920L](#) [JANSR2N2907AUB](#) [CMLT3946EG TR](#) [SNSS40600CF8T1G](#) [CMLT3906EG TR](#) [GRP-DATA-JANS2N2907AUB](#) [GRP-DATA-JANS2N2222AUA](#) [MMDT3946FL3-7](#) [2N4240](#) [JANS2N3019](#) [MSB30KH-13](#) [2N2221AUB](#) [2SD1815T-TL-E](#) [2N6678](#) [2N2907Ae4](#) [JAN2N3507](#)