


Miniature PCB Relay RE

- 1 pole 6 A, 1 form A (NO) contact
- Sensitive coil 200 mW
- 4 kV coil-contact
- Optimized height 10.6mm
- PCB area 200mm²
- Wash tight
- Product in accordance to IEC 60335-1 (domestic appliances)



F0141-B

Typical applications
PLC's, timers, temperature control, I/O cards, white goods



Approvals



VDE REG.-Nr. 5063, UL E214025
Technical data of approved types on request

Contact Data

| | |
|--|------------------------------|
| Contact arrangement | 1 form A (NO) |
| Rated voltage | 250VAC |
| Max. switching voltage | 400VAC |
| Rated current | 6A |
| Limiting making current, max 4s, duty factor 10% | 15A |
| Breaking capacity max. | 1500VA |
| Contact material | AgCdO, AgNi 0.15, AgNi 90/10 |
| Frequency of operation, with/without load | 360/72000 ops./h |
| Operate/release time max. | 10/5ms |
| Bounce time max. | 4ms |

Contact ratings

| Type | Contact | Load | Cycles |
|----------------------|---------|-----------------------------------|--------------------------|
| IEC 61810 | | | |
| RE030 | A (NO) | 6A, 250VAC, cosφ=1, 70°C | 100x10 ³ |
| RE034 | A (NO) | 6A, 250VAC, cosφ=1, 70°C | 100x10 ³ |
| UL 508 | | | |
| RE030 | A (NO) | 1/4 hp, 240VAC, motor 40°C | 30x10 ³ |
| RE030 | A (NO) | B300 pilot duty 40°C | 6x10 ³ |
| RE034 | A (NO) | 6A, 250VAC, general purpose, 70°C | 100x10 ³ |
| RE034 | A (NO) | B300 pilot duty 40°C | 6x10 ³ |
| Mechanical endurance | | | >30x10 ⁶ ops. |



Coil Data


| | |
|---|-------------|
| Coil voltage range | 5 to 48 VDC |
| Operative range, IEC 61810 | 2 |
| Coil insulation system according UL1446 | F |

Coil versions, DC coil

| Coil code | Rated voltage VDC | Operate voltage VDC | Release voltage VDC | Coil resistance Ω±10% ¹⁾ | Rated coil power mW |
|-----------|-------------------|---------------------|---------------------|-------------------------------------|---------------------|
| 5 | 5 | 3.5 | 0.5 | 125 | 200 |
| 6 | 6 | 4.2 | 0.6 | 180 | 200 |
| 12 | 12 | 8.4 | 1.2 | 720 | 200 |
| 18 | 18 | 12.6 | 1.8 | 1620 | 200 |
| 24 | 24 | 16.8 | 2.4 | 2880 ¹⁾ | 200 |
| 48 | 48 | 33.6 | 4.8 | 11520 ¹⁾ | 200 |

¹⁾ Coil resistance ±15%.

All figures are given for coil without pre-energization, at ambient temperature +23°C. Other coil voltages on request.

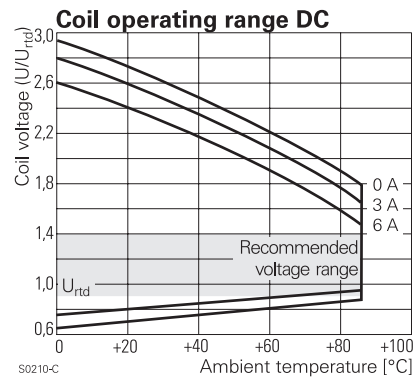

Insulation Data

| | |
|------------------------------------|-----------------------|
| Initial dielectric strength | |
| between open contacts | 1000V _{rms} |
| between contact and coil | 4000V _{rms} |
| Initial insulation resistance | |
| open contact circuit | >10x10 ⁹ Ω |
| coil-contact circuit | >10x10 ⁹ Ω |
| Clearance/creepage | |
| between contact and coil | ≥4/4mm |
| Material group of insulation parts | IIla |
| Tracking index of relay base | PTI250V |


Miniature PCB Relay RE (Continued)

Other Data


| | |
|---|----------------------------|
| Material compliance: EU RoHS/ELV, China RoHS, REACH, Halogen content refer to the Product Compliance Support Center at www.te.com/customersupport/rohssupportcenter | |
| Resistance to heat and fire | according EN 60335, par.30 |
| Ambient temperature | -40 to +70°C |
| | -40 to +85°C at 4A |
| Category of environmental protection | |
| IEC 61810 | RTIII - wash tight |
| Vibration resistance (functional) | 10g |
| Terminal type | PCB-THT |
| Resistance to soldering heat THT | |
| IEC 60068-2-20 | 260°C/5s |
| Packaging/unit | tube/25 pcs. |

PCB layout / terminal assignment

Bottom view on solder pins




S0176-BH



S0176-BJ

Dimensions

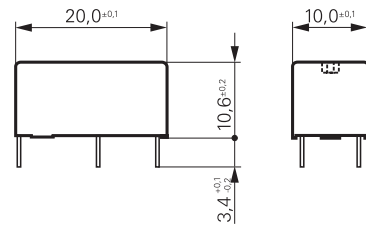

S0271-AH

Product code structure

Typical product code **RE 0 3 2 012**

| | | | | | | | | | |
|------------------------------|--|--|--|--|--|-------------|-------------------------|--------------|---------|
| Type | RE Miniature PCB Relay RE | | | | | | | | |
| Version | 0 Wash tight | | | | | | | | |
| Contact configuration | 3 1 form A (NO) contact | | | | | | | | |
| Contact material | <table border="0"> <tr> <td>1 AgNi 0.15</td> <td>2 AgNi 0.15 gold plated</td> </tr> <tr> <td>4 AgNi 90/10</td> <td>0 AgCdO</td> </tr> </table> | | | | | 1 AgNi 0.15 | 2 AgNi 0.15 gold plated | 4 AgNi 90/10 | 0 AgCdO |
| 1 AgNi 0.15 | 2 AgNi 0.15 gold plated | | | | | | | | |
| 4 AgNi 90/10 | 0 AgCdO | | | | | | | | |
| Coil | Coil code: please refer to coil versions table | | | | | | | | |

| Product code | Version | Contacts | Contact material | Coil | Part number |
|--------------|------------|--------------|------------------|-------|-------------|
| RE030005 | wash tight | 1 form A | AgCdO | 5VDC | 1393217-1 |
| RE030006 | | 1 NO contact | | 6VDC | 1393217-2 |
| RE030012 | | | | 12VDC | 1393217-4 |
| RE030024 | | | | 24VDC | 1393217-8 |
| RE030048 | | | | 48VDC | 1-1393217-1 |
| RE032005 | | | AgNi 0,15 | 5VDC | 1-1393217-9 |
| RE032006 | | | gold plated | 6VDC | 2-1393217-0 |
| RE032012 | | | | 12VDC | 2-1393217-2 |
| RE032024 | | | | 24VDC | 2-1393217-4 |
| RE032048 | | | | 48VDC | 2-1393217-5 |
| RE034005 | | | AgNi 90/10 | 5VDC | 2-1416010-3 |
| RE034006 | | | | 6VDC | 2-1416010-4 |
| RE034012 | | | | 12VDC | 2-1416010-6 |
| RE034024 | | | | 24VDC | 2-1416010-7 |
| RE034048 | | | | 48VDC | 2-1416010-8 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [General Purpose Relays](#) category:

Click to view products by [TE Connectivity](#) manufacturer:

Other Similar products are found below :

[APF30318](#) [JVN1AF-4.5V-F](#) [PCN-105D3MHZ](#) [5JO-10000S-SIL](#) [5JO-1000CD-SIL](#) [5JO-400CD-SIL](#) [LY2S-AC220/240](#) [LYQ20DC12](#)
[6031007G](#) [6131406HQ](#) [6-1393099-8](#) [6-1393122-4](#) [6-1393123-2](#) [6-1393767-1](#) [6-1393843-7](#) [6-1415012-1](#) [6-1419102-2](#) [6-1423698-4](#) [6-](#)
[1608051-6](#) [6-1616170-6](#) [6-1616248-2](#) [6-1616282-3](#) [6-1616348-2](#) [6-1616350-1](#) [6-1616350-8](#) [6-1616358-7](#) [6-1616359-9](#) [6-1616360-9](#) [6-](#)
[1617039-1](#) [6-1617090-2](#) [6-1617090-5](#) [6-1617347-5](#) [6-1617353-3](#) [6-1617801-8](#) [6-1618248-4](#) [M83536/1-027M](#) [M83725/1-005](#) [CX-4014](#)
[MAHC-5494](#) [MAVCD-5419-6](#) [703XCX-120A](#) [7-1393100-5](#) [7-1393111-7](#) [7-1393144-5](#) [7-1393767-8](#) [7-1419130-3](#) [7-1608047-2](#) [7-1608065-](#)
[1](#) [7-1617090-0](#) [7-1617090-4](#)