REV
 DATE
 ECN NUMBER
 ECR COMMENT

 005
 21 Jun 2017
 C03630
 ADD TEMPERATURE RATING


## General purpose crocodile clip.

Manufactured from bright mild steel.

Large (30mm) jaw opening makes it suitable as a battery clip.

The integral cable clamp has a secure 4mm screw fixing.

The enhanced finger grip ensures a simple operation.

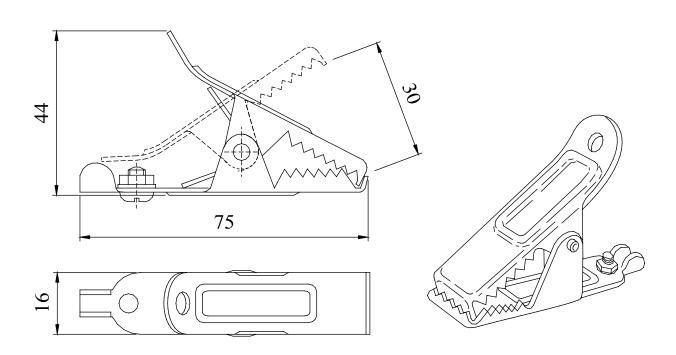

CLIP

MATERIAL : Bright Mild Steel

CS4, nickel plated

: Temperature Rating

 $-20 \text{ to} + 200^{\circ}\text{C}$ 

SCREW / NUT

: M4 x 6mm, Steel,

& WASHER
Current Rating

Nickel plated : 25 Amps

RATED VOLTAGE:

: 50V

PVC INSULATED BOOT AVAILABLE IN RED 310-0500 OR BLACK 310-0100 OPERATING TEMPERATURE WITH BOOT FITTED -20 TO +60°C



PROPRIETARY AND CONFIDENTIAL:

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE
ANY EFFOO ALPHA MANUFACTURING
WRITTEN PERMISSION OF ALPHA 3 MANUFACTURING
IS PROHIBITED.

ERMISSION OF ALPHA 3 MANUFACTURING
TED.
acturing is a division of Alpha 3 Manufacturing LTD
acturing, Deltron Emcon House, Hargreaves Way,
d. Park, Scunthorpe, North Lincoinshire, DN15 8RF, UK

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMENTES ADDIAL TOLERANCE: NO DECIMAL PLACES 1 DECIMAL PLACE 2 DECIMAL PLACES ANGULAR TOLERANCE:

IF IN DOUBT ASK! DO NOT SCALE DRAWING!	AUTHOR Shaun Barron		LARGE CROCODILE			
SEE NOTE	EDITOR	DT	FILE 30	304-0000		
ATERIAL SEE NOTE	APPROVER	DT	PART 30	304-0000		
THE FINISHED PRODUCT SHOULD BE CLEAN AND FREE FROM ALL LIQUIDS AND DEBRIS. SURFACES SHOULD BE OF UNIFORM	THIRD ANGLE PROJECTION	SHEET 1 OF 1	ISSUE/REV. 005	VERSION	7	
APPEARANCE FREE FROM SHARP EDGES, BURRS AND CORROSION		SCALE 1:1 A4	RELEASED	EDIT DATE	21 Jun 2017	

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for deltron manufacturer:

Other Similar products are found below:

591-0400 593-0700 610-0700 610-0800 611-0400 650-0300 651-0300 651-0800 342-0000 W127G 066541F 066542D 610-0520 6300600 W205C W106C 611-0700 717-0400 456-0020 460-0070 479-0020-5 486-121209-66 480-C010 490-170805E-68 459-0080 459-0140
590-0700 MDU14S 4MP2616 461-0050 487-221208E-68 571-0400-01 480-C040 462-0020E 4DR3522 487-261612E-66 486-261609-68
466-0050 356-0200 702-0500 711-0500 487-261609E-66 487-221209E-68 462-0040A 456-0030 461-0070E 490-040503A-68 486-S682616 800-0400 4ELM6