



ISSUE 3; December 2012 - RoHS 2011/65/EU



### Description

- Suitable for real time clock applications
- 32.768kHz output crystal oscillators
- Ceramic package with a seam sealed metal lid, hermetically sealed

### Frequency Range

- Frequency 32.7680kHz

### Supply Voltage

- Voltage 1.8V ±5%

### Ageing

- Ageing ±3ppm max per year

### Output Compatibility & Load

- Output Compatibility CMOS
- Drive Capability 15pF max

### Frequency Stabilities

- Frequency Stability ±20ppm, ±25ppm ±50ppm, ±100ppm  
(inclusive of supply voltage and output load variations over the operating temperature range)

### Operating Temperature Ranges

- 0 to 70°C
- -40 to 85°C

### Output Details

- Logic '1' to pad 1 enables oscillator output
- Logic '0' to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state
- No connection to pad 1 enables oscillator output

### Environmental Parameters


- Storage Temperature Range: -55 to 125°C
- Shock: MIL-STD-883F, Method 2002.4: 1500G, 0.5ms, 3 times in each of 3 mutually perpendicular planes.
- Vibration: MIL-STD-883F, Method 2007.3: 20G (20Hz-2000Hz), 1.52mm amplitude

### Ordering Information (\*minimum required)

- Frequency\*
- Model\*
- Output
- Frequency Stability\*
- Operating Temperature Range\*
- Supply Voltage
- Example
- 32.768kHz CFPS-107
- CMOS ±50ppm 0 to 70C 1.8V




### Outline (mm)

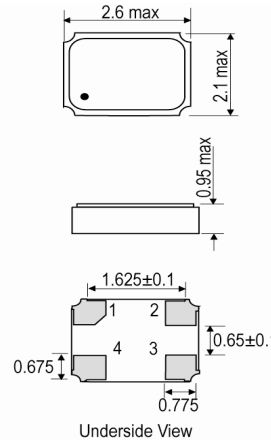


- Pad Connections
1. Tri-State Operation
  2. GND
  3. Output
  4. +Vs

### Solder Pad Layout



### Test Circuit

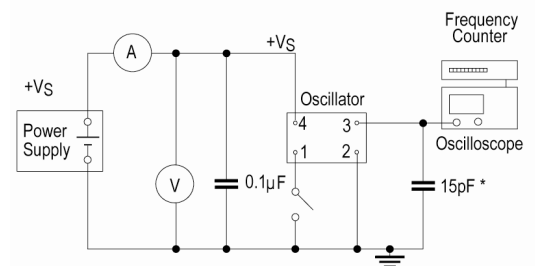

\* Inclusive of jigging and equipment capacitance

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
 Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18  
 USA: +1 (0)408.273.4530


Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
 Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)



**Packing Details**

- Pack Style: **Bulk**            Loose in bulk pack  
Pack Size                    100
- Pack Style: **Reel**            Tape and reel in accordance with EIA-481-D  
Pack Size                    1,000
- Alternative packing options available

**Wave Form**

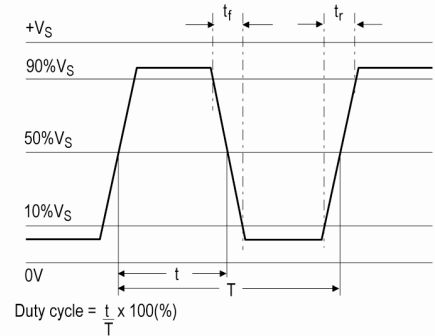

**Electrical Specification - maximum limiting values 1.8V ±5%**

Frequency Range	Temp Range	Stability Inclusive		Current Draw	Rise & Fall (10 to 90%)	Duty Cycle %
		Min	Max			
32.768kHz	0 to 70°C	±20ppm	±100ppm	1.5mA	50ns	40/60%
	-40 to 85°C	±25ppm	±100ppm	1.5mA	50ns	40/60%

*This document was correct at the time of printing; please contact your local sales office for the latest version*

**Sales Office Contact Details:**

UK: +44 (0)1460 270200  
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18  
USA: +1 (0)408.273.4530

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [iqd manufacturer](#):*

Other Similar products are found below :

[LFXTAL071761CUTT](#) [LFMCXO063767BULK](#) [LFMCXO063773BULK](#) [LFOCXO063802BULK](#) [LFOCXO063809BULK](#)  
[LFTCXO063709BULK](#) [LFTCXO063710BULK](#) [LFTCXO063779BULK](#) [LFTCXO070028Cutt](#) [LFTVXO063701BULK](#)  
[LFTVXO063702BULK](#) [LFTVXO063703BULK](#) [LFTVXO063707BULK](#) [LFTVXO063791BULK](#) [LFXTAL003156](#) [LFMCXO063766BULK](#)  
[LFMCXO063771BULK](#) [LFOCXO063816BULK](#) [LFTCXO063713BULK](#) [LFTCXO063714BULK](#) [LFTCXO063716BULK](#)  
[LFTVXO063704BULK](#) [LFTVXO063705BULK](#) [LFTVXO063706BULK](#) [LFTVXO063789BULK](#) [LFTVXO063790BULK](#) [LFXTAL003113](#)  
[LFOCXO063809](#) [LFSPXO009581](#) [LFTCXO063784](#) [LFTVXO063786](#) [LFSPXO009686Bulk](#) [LFRBXO059244Bulk](#) [LFTVXO075802Cutt](#)  
[LFOCXO067293Bulk](#) [LFTCXO075792Cutt](#) [LFMCXO064079BULK](#) [LFSPXO071189](#) [LFOCXO067293](#) [LFXTAL012312BULK](#)  
[LFTCXO063780BULK](#) [LFSPXO056269CUTT](#) [LFOCXO063803BULK](#) [LFSPXO009592CUTT](#) [LFOCXO065520Bulk](#) [LFMISC070550Bulk](#)  
[LFSPXO025494Cutt](#) [LFMCXO064080BULK](#) [LFOCXO063804BULK](#) [LFSPXO019884BULK](#)