



ISSUE 6; September 2012 - RoHS 2011/65/EU



Description

- Standard 5 x 3.2 crystal oscillator.
- Ceramic package with a seam sealed metal lid, hermetically sealed.
- Please see our CFPS-12 for a 5.0V version of this package.
- Please see our CFPS-37 for a 2.5V version of this package.
- Please see our CFPS-69 for a low current version of this package.
- Fast Make capability: CFPS-9 programmable oscillator as the nearest equivalent fast make model.
- MEMS capability: IQMS-510 series oscillators are the nearest equivalent MEMS model.

Frequency Range

- Frequency 0.5 to 160.0 MHz

Supply Voltage

- Voltage 3.3V ±0.3V

Ageing

- Ageing ±3ppm max per year @ 25°C

Output Compatibility & Load

- Output Compatibility CMOS
- Drive Capability 15pF max

Frequency Stabilities

- Frequency Stability ±25ppm, ±100ppm
(inclusive of supply voltage and output load variations over the operating temperature range)

Operating Temperature Ranges

- 10 to 70°C
- 40 to 85°C

Output Control

- Standby Operation:
Logic '1' (>70% VS) to pad 1 enables oscillator output
Logic '0' (<30% VS) to pad 1 disables oscillator output; when disabled the oscillator output goes to the high impedance state
No connection to pad 1 enables oscillator output
Standby Current: 10µA max

Environmental Parameters


- Storage Temperature Range: -55 to 125°C
- Shock: MIL-STD-202F, Method 213B: 1000G, 0.5ms, 1/2 sine wave
- Vibration: MIL-STD-202F, Method 204D, Test Condition D: 20G (10Hz-2000Hz), 4hrs in 3 mutually perpendicular planes (total 12hrs)

Ordering Information (*minimum required)


- Frequency*
- Model*
- Output
- Frequency Stability*
- Operating Temperature Range*
- Supply Voltage
- Example:
10.0MHz CFPS-9
CMOS ±50ppm -10 to 70C 3.3V



Outline (mm)

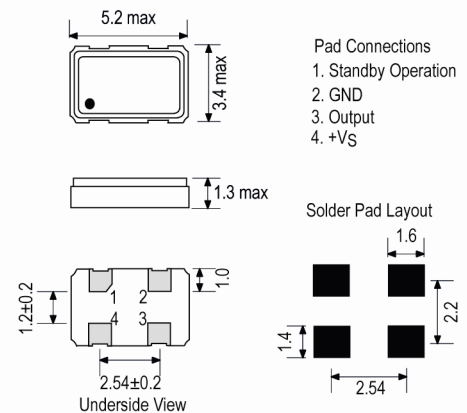

Test Circuit

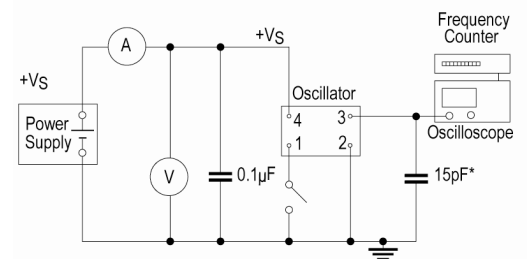

* Inclusive of jigging and equipment capacitance

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
USA: +1 (0)408.273.4530


Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com



Packing Details

- Pack Style: **Bulk** Loose in bulk pack
Pack Size 100
- Pack Style: **Reel** Tape & reel in accordance with EIA-481-D
Pack Size 1,000
- Alternative packing options available

Wave Form

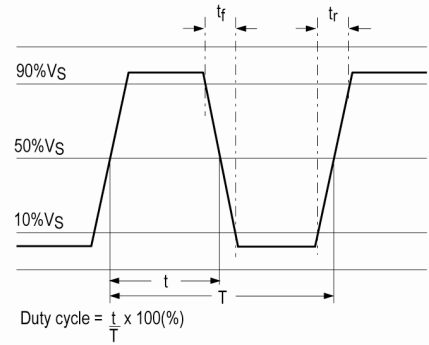

Electrical Specification - maximum limiting values 3.3V ±0.3V

Frequency Range	Temp Range	Stability Inclusive		Current Draw	Rise & Fall (10 to 90%)	Duty Cycle %
		Min	Max			
0.5 to 9.999999MHz	-10 to 70°C	±25ppm	±100ppm	20.0mA	10ns	40/60%
	-40 to 85°C	±25ppm	±100ppm	20.0mA	10ns	40/60%
10.0 to 19.999999MHz	-10 to 70°C	±25ppm	±100ppm	20.0mA	10ns	40/60%
	-40 to 85°C	±25ppm	±100ppm	20.0mA	10ns	40/60%
20.0 to 31.999999MHz	-10 to 70°C	±25ppm	±100ppm	20.0mA	10ns	40/60%
	-40 to 85°C	±25ppm	±100ppm	20.0mA	10ns	40/60%
32.0 to 49.999999MHz	-10 to 70°C	±25ppm	±100ppm	20.0mA	10ns	40/60%
	-40 to 85°C	±25ppm	±100ppm	20.0mA	10ns	40/60%
50.0 to 79.999999MHz	-10 to 70°C	±25ppm	±100ppm	30.0mA	8ns	40/60%
	-40 to 85°C	±25ppm	±100ppm	30.0mA	8ns	40/60%
80.0 to 99.999999MHz	-10 to 70°C	±25ppm	±100ppm	40.0mA	5ns	40/60%
	-40 to 85°C	±25ppm	±100ppm	40.0mA	5ns	40/60%
100.0 to 160.0MHz	-10 to 70°C	±25ppm	±100ppm	50.0mA	4ns	40/60%
	-40 to 85°C	±25ppm	±100ppm	50.0mA	4ns	40/60%

This document was correct at the time of printing; please contact your local sales office for the latest version

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: +49 (0)7264 9145-0

France: +33 (0)5 34 50 91 18
USA: +1 (0)408.273.4530

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [iqd manufacturer](#):

Other Similar products are found below :

[LFXTAL071761CUTT](#) [LFMCXO063767BULK](#) [LFMCXO063773BULK](#) [LFOCXO063802BULK](#) [LFOCXO063809BULK](#)
[LFTCXO063709BULK](#) [LFTCXO063710BULK](#) [LFTCXO063779BULK](#) [LFTCXO070028Cutt](#) [LFTVXO063701BULK](#)
[LFTVXO063702BULK](#) [LFTVXO063703BULK](#) [LFTVXO063707BULK](#) [LFTVXO063791BULK](#) [LFXTAL003156](#) [LFMCXO063766BULK](#)
[LFMCXO063771BULK](#) [LFOCXO063816BULK](#) [LFTCXO063713BULK](#) [LFTCXO063714BULK](#) [LFTCXO063716BULK](#)
[LFTVXO063704BULK](#) [LFTVXO063705BULK](#) [LFTVXO063706BULK](#) [LFTVXO063789BULK](#) [LFTVXO063790BULK](#) [LFXTAL003113](#)
[LFOCXO063809](#) [LFSPXO009581](#) [LFTCXO063784](#) [LFTVXO063786](#) [LFSPXO009686Bulk](#) [LFRBXO059244Bulk](#) [LFTVXO075802Cutt](#)
[LFOCXO067293Bulk](#) [LFTCXO075792Cutt](#) [LFMCXO064079BULK](#) [LFSPXO071189](#) [LFOCXO067293](#) [LFXTAL012312BULK](#)
[LFTCXO063780BULK](#) [LFSPXO056269CUTT](#) [LFOCXO063803BULK](#) [LFSPXO009592CUTT](#) [LFOCXO065520Bulk](#) [LFMISC070550Bulk](#)
[LFSPXO025494Cutt](#) [LFMCXO064080BULK](#) [LFOCXO063804BULK](#) [LFSPXO019884BULK](#)