


INTERCONNECTION

Pluggable Terminal Strips Plug in Style

- Moulded in natural PA6, self extinguishing to UL94-V2 or white PA6.6, self extinguishing to UL94-V0
- Easily cut to size
- Available pre-cut to length
- CE Approved



SPECIFICATION


Voltage (max)	450V AC
Working temperature	110°C
No. of poles	12
Moulding	UL94-V2 Self extinguishing PA6 UL94-V0 Self extinguishing PA6.6
Conducting bush	Nikel plated brass
Screws	Zinc, plated steel

UL94-V2 Material

TYPE NO.	SIZE / RATING	INSERT DIAMETER	TERMINAL SCREWS	LENGTH	WIDTH	HEIGHT	PITCH	FIXING HOLE DIAMETER	MAX CURRENT
CTSN431/12MF	8mm/6A	2.9mm	M3	94mm	16mm	15.5mm	8mm	2.75mm	17.5A
CTSN433/12MF	10.25mm/10A	3.4mm	M3	119.4mm	20.5mm	16.4mm	10.25mm	3.2mm	24A
CTSN434/12MF	12.5mm/16A	4.3mm	M3.5	143mm	23.5mm	19mm	12.3mm	3.5mm	57A



UL94-V0 Material

TYPE NO.	SIZE / RATING	INSERT DIAMETER	TERMINAL SCREWS	LENGTH	WIDTH	HEIGHT	PITCH	FIXING HOLE DIAMETER	MAX CURRENT
CTSN631/12MF	8mm/6A	2.9mm	M3	94mm	16mm	15.5mm	8mm	2.75mm	17.5A
CTSN633/12MF	10.25mm/10A	3.4mm	M3	119.4mm	20.5mm	16.4mm	10.25mm	3.2mm	24A
CTSN634/12MF	12.5mm/16A	4.3mm	M3.5	143mm	23.5mm	19mm	12.3mm	3.5mm	57A

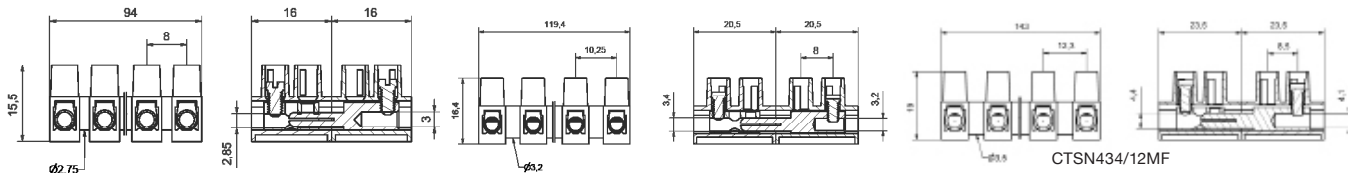


Strain relief

- Clamps external conductors in lighting fixtures according to EN 60598
- Natural colour PA6
- Takes the strain on the wires
- Prevents conductors from twisting
- Protects wire coating from abrasion and friction

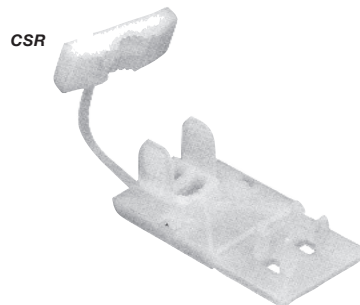

TYPE NO.	TERMINAL STRIP	LENGTH	WIDTH	HEIGHT
CSR1	CTSN431	49.5mm	31mm	22.5mm
CSR2	CTSN433 / CTSN433T	52.5mm	31mm	22.5mm
CSR3	CTSN434	54.5mm	31mm	22.5mm



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [camden manufacturer](#):

Other Similar products are found below :

[412689X](#) [CTBP92HE/10](#) [CTBP92VE/12R](#) [CTBP9350/12](#) [IND515205-240-T/GRN](#) [IND515205-240-T/RD](#) [IND5032405-240-T/GRN](#)
[CE10.00.EI](#) [C192SHAND](#) [RTM5006/16-PAT](#) [CNMB/6ST/2](#) [CNMB/4ST/2](#) [CSACST004](#) [CTBP9200/9](#) [CIME/M/BE2250SS](#) [CHH64E1BL](#)
[CIM/15W-DMFS](#) [CHHBAT2GY](#) [CFTBN/2](#) [CCB2S1/04](#) [CHDX6-222C](#) [CHDX8-224](#) [CHDASMP29](#) [CHDASMP34](#) [CHDX810DD](#)
[CHDX811DD](#) [CCTTM40LR](#) [CTBP92VJ/5S](#) [CTBP92VJ/8R](#) [CTSN431/12/M](#) [CTSN433/12/M](#) [CUABOX006](#) [IND513113-LED-RD](#)
[CE10.00.FM](#) [CBRPH-BLK](#) [RX2008/S-5-WH](#) [CBARD-CAR](#) [CRDCG0007](#) [CNMB/4/KIT](#) [CTB5050/5](#) [CTBP92HE/11](#) [CTBP9358/10AO](#)
[CHH66C2GY](#) [CHH456PBK](#) [CHH451ABK](#) [CIM/9W-DMFS](#) [CIM/25W-DMFS](#) [RTM5004/14-NC-BLK](#) [RTM5006/16-NC-BLK](#)
[IND5032405-125-T/AMB](#)