

Easy Break **Terminal Strips****Features**



- Easy snapped to required number of poles
- No remaining burrs
- No tools needed to cut to length
- Moulded from PA6 to UL94V-2
- Supplied natural colour. Black optional
- Supplied with screws in raised position

Specification

Voltage	450V
Temperature	-30 to 110°C
Moulding	PA6 UL94V-2
Inserts	Nickel plated brass
Screws	Zinc plated steel
No. of poles	12

Type No.	Length A (mm)	Width B (mm)	Height C (mm)	D	E	Screw
CTSOS431	95.5	17.5	12.75	8	3	M3
CTSOS433	118.1	19	13.85	10	3.5	M3
CTSOS434	142.2	20.8	16.6	12	4.4	M3.5
CTSOS435	159.9	23	20.6	13.5	6	M4
CTSOS438	179.3	26	27.85	15	M5	

Insert Diameter	Ø3mm	Ø3.5mm	Ø4.4mm	Ø6mm	Ø8.2mm
Rated Connecting capacity	2.5mm ²	6mm ²	10mm ²	16mm ²	35mm ²
Conductors minimum section	1mm ²	2.5mm ²	4mm ²	6mm ²	16mm ²
Test current	24A	41A	57A	76A	125A

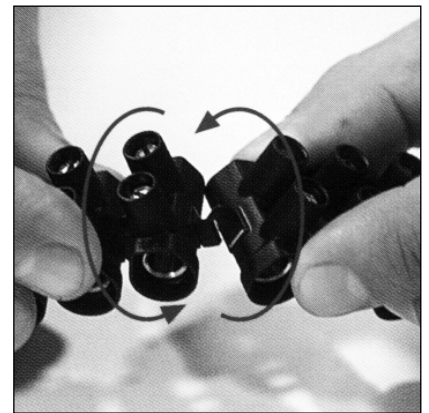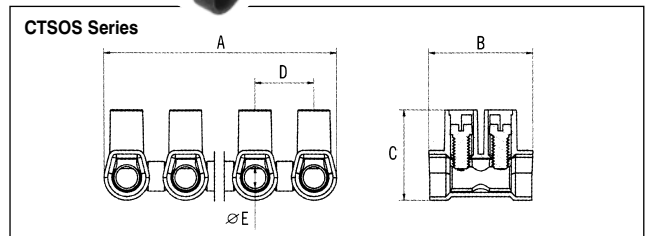

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [camden manufacturer](#):

Other Similar products are found below :

[412689X](#) [CTBP92VE/12R](#) [CTBP9350/12](#) [IND515205-240-T/GRN](#) [IND515205-240-T/RD](#) [IND5032405-240-T/GRN](#) [CE10.00.EI](#)
[C192SHAND](#) [CNMB/6ST/2](#) [CNMB/4ST/2](#) [CSACST004](#) [CTBP9200/9](#) [CIME/M/BE2250SS](#) [CHH64E1BL](#) [CIM/15W-DMFS](#) [CHHBAT2GY](#)
[CFTBN/2](#) [CCB2S1/04](#) [CHDX6-221C](#) [CHDX8-224](#) [CHDASMP29](#) [CHDASMP34](#) [CHDX810DD](#) [CHDX811DD](#) [CCTTM40LR](#)
[CTBP92VJ/5S](#) [CTBP92VJ/8R](#) [CTSN431/12/M](#) [CTSN433/12/M](#) [CUABOX006](#) [CE10.00.FM](#) [CBRPH-BLK](#) [BIM2003/13-WH/WH](#)
[RX2008/S-5-WH](#) [CBARD-CAR](#) [CRDCG0007](#) [CNMB/4/KIT](#) [CTB5050/5](#) [CTBP92HE/11](#) [CTBP9358/10AO](#) [CHH66C2GY](#) [CHH456PBK](#)
[CHH451ABK](#) [CIM/9W-DMFS](#) [CIM/25W-DMFS](#) [RTM5006/16-NC-BLK](#) [IND5032405-125-T/AMB](#) [CCB1S1/03](#) [CCD2S1/04](#) [CCE1S1/05](#)