

Issue No.	Eng. Ref. No.	REVISIONS	Date	App. By
01	--	Original	20.01.10	DPP

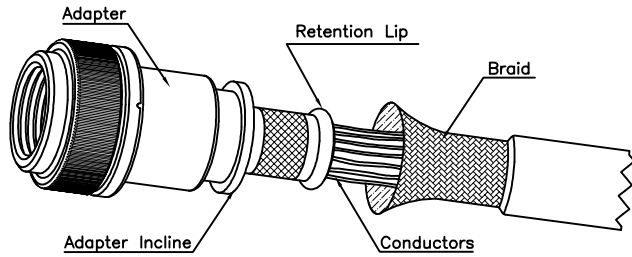


Figure-1

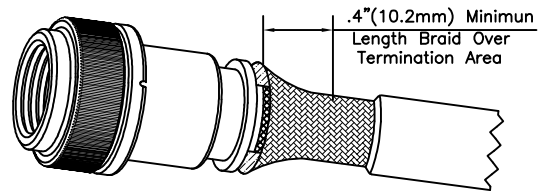


Figure-2

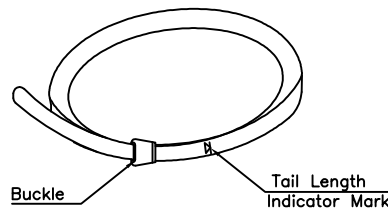


Figure-3

1. Prepare Cable Braid for termination process (Figure-1).
2. Push Braid forward over Adapter Retension Lip to the Adapter incline Point (or .4" [10.2mm] minimum braid length). Adjust Braid as required to remove slack and insure a snug fit around the shield termination area (figure-2)
3. Prepare the Band in the following manner:-
 - A. Roll Band through the Buckle Slot twice. (Band must be double-coiled over the cable)
 - B. Pull on Band until Mark (▷) is within approximately .250 inch (6.4mm) of Buckle Slot (figure-3). The Band may be tightened further if desired.
4. Using a suitable Band Assembly Tool, [⬆] tighten and assemble the coiled band to fix the prepared braid over the Adapter terminating area firmly.
5. Shrink the heatshrink boot, when necessary, using a heat shrink gun.

⬆ We recommend the following tools from
BAND-IT-IDEX Inc. CO 80216-3070, USA.

For Standard Band (1/4" wide) - A40199

For Micro Band (1/8" wide) - A30199

Amphenol AIIPL		TITLE <i>Braid Assembly Instructions- Band lock Adaptor</i>			
				All Dimensions are in MM/INCHES	
	Name	Date	Dwg. No. PSTDBS257	STANDARD	
Drawn by	<i>Santhosh</i>	20.01.10			
Checked by	<i>K.S.C</i>	20.01.10			
App.by	<i>DPP</i>	20.01.10			
			Dwg. Size A4	Doc. No.: QF-DEV-76 REV. NO. : 02	Sheet 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Circular MIL Spec Tools, Hardware & Accessories](#) *category:*

Click to view products by [Amphenol](#) *manufacturer:*

Other Similar products are found below :

[0113-201-2025](#) [600-079-06](#) [600-146-06](#) [M10-101982-143](#) [M10-101982-163](#) [M10-101983-183](#) [M10-150912-083](#) [M10-454396-008](#)
[602GB18808](#) [CS3102A-22-14PW](#) [M2887615-CD](#) [627-009](#) [M38999/9-19B](#) [630A007NF083A](#) [630B007M051A](#) [630BJ003NF032H](#) [637-](#)
[149NF04B](#) [M39029/29-215](#) [6408-203V-09273](#) [6426-201-11343](#) [650FS002NF16](#) [660-008NF14S7-01](#) [660-009M22H8-03](#) [660-013NF19U6-](#)
[210](#) [660-015M10S6-17](#) [660-015NF10S5-01](#) [660-015NF14R3.5-01](#) [660-023NF19H6-19](#) [660-024NF11S12-01](#) [660-024NF11S3-01](#) [660-](#)
[024NF17S4-109](#) [660-050XM17F4-01](#) [660-068NF25R6-30G](#) [660-070M23S8-04](#) [660-073MTCH9-20](#) [M83723/61-18W](#) [M83723/61-218R](#)
[M83723/61-224W](#) [667-084-23C](#) [667-084-35C](#) [667-224NF16](#) [687-697NF-1](#) [M85049/94-10-A](#) [M85049/96-7-A](#) [M855282-10A01A](#)
[M85528/2-10B](#) [M855282-18A01A](#) [M85528/2-22A01A](#) [M85528/2-22AA](#) [710HS460NF2508](#)