




Applications :


- 5G development
- Research & Development Labs
- Bench VNA's and analyzers
- High Volume Production Test
- RF Module Testing

When everything is important, Times new Clarity™ Series is the clear choice. Industry-leading performance and unparalleled value.

- | | | |
|--------------------------------|------------------------------|--------------------------|
| • Broad Frequency Response | • Solid Connector Retention | • Long Flex Life |
| • Rugged & Durable | • RF Stable with Flexure | • Ergonomically Designed |
| • Predictable over Temperature | • Consistent between Batches | • Attractive Appearance |

Ordering Information:

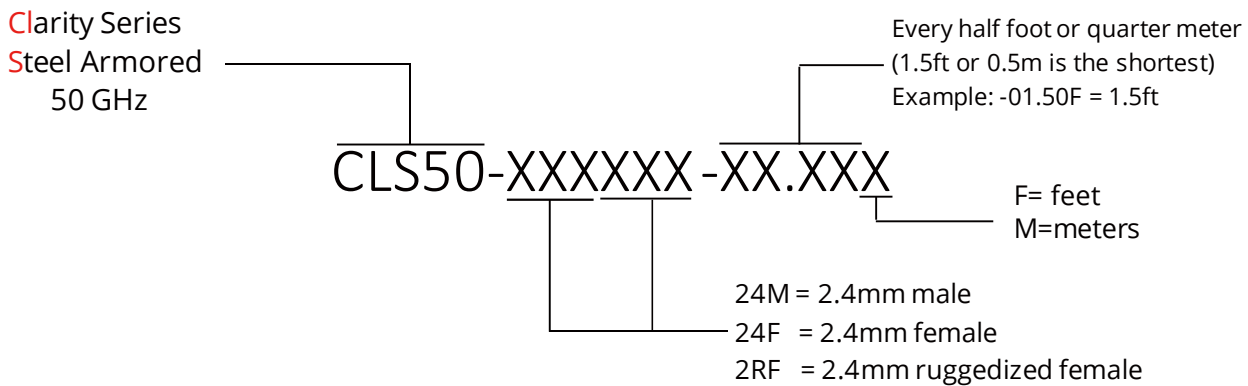

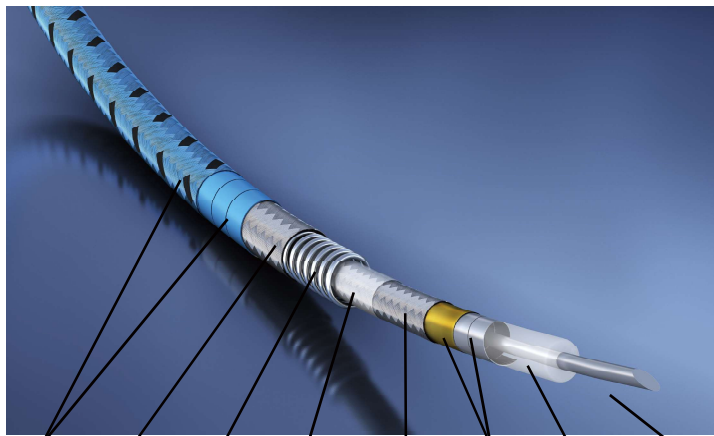

Abrasion resistant PTFE braid and interlayer
 Stainless steel wire round braid
 Stainless steel spring
 FEP Jacket
 Silver plated copper round wire braid
 Helically interlayer
 Times Solid TF-4 Dielectric
 Solid Silver plate copper center conductor

Connectors & Strain Relief :


- User friendly stainless steel SureGrip™ knurled coupling nut
- Unique, elliptical-shaped, Sure-Grip™ injected molded strain relief




Mechanical Specifications				
Dimensions		in	mm	
Armored Diameter: armor/strain relief		0.29 / 0.50	7.95 / 12.70	
Min bend radius, armored (max flex life)		1.5 (3.0)	38 (76)	
Crushing (armored version)		200 lbs/lin.in.		
Flex life ¹		50,000		
Temperature Range		-67°/+ 257°F	-55°/+125°C	
Electrical Specifications (50GHz)				
Impedance		50 Ohms		
Velocity of Propagation		70%		
Shielding Effectiveness		> 100 dB		
Capacitance		29pf/ft (95pf/m)		
VSWR (typ/max)		1.30:1 / 1.40:1		
Phase Stability (degrees)*	typical	+/- 4.0		
Amplitude Stability (dB)*	typical	+/- 0.08		
Attenuation, max	@77°F (25°C)	18 GHz	40 GHz	50 GHz
		0.93	1.50	1.72
		(3.06)	(4.93)	(5.64)
Attenuation (per 100ft) at any frequency: 0.5556*√f(MHz) + 0.0008*f(MHz)				

1. As tested using Times' flex testing methods. 4ft long cable. Longer cables can have more total instability. Assumes test equipment is calibrated every 8 hours. New cables can have a break in period of several hundred flexes before optimum stability occurs. Contact your Times representative or the factory for a copy of this test procedure and/or actual test results.

Amplitude Stability while in motion

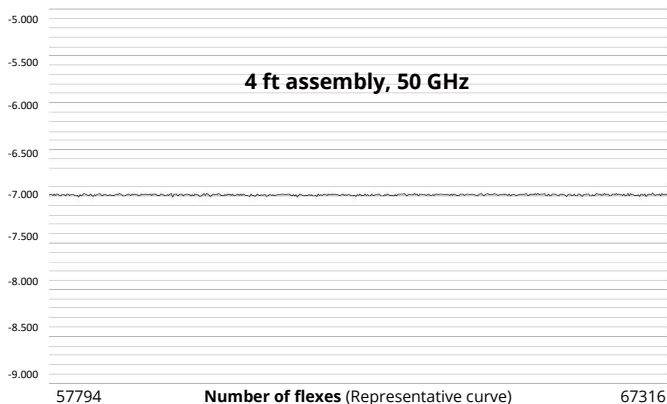

Phase Stability while in motion

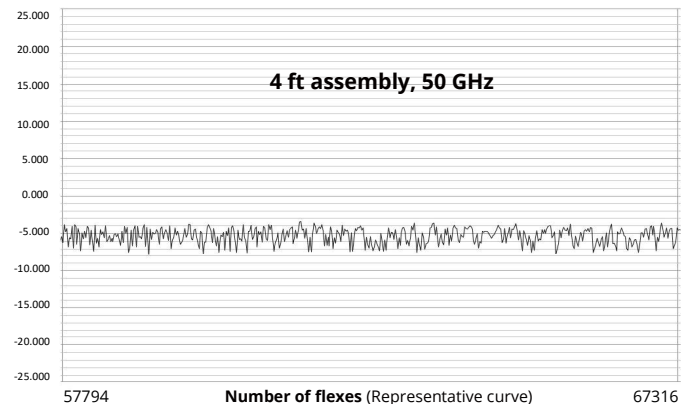

Always :

- Inspect interfaces before every mate. Clean frequently
- Gently start the coupling nut. Fully thread & tighten w/fingers first
- Use a calibrated torque wrench
- Cap connectors and protect the assembly when not in use

Never :

- Force the cable beyond the recommended minimum bend radius
- Force two connectors. If any resistance is felt STOP and examine
- Mate connectors that have non-concentric contacts
- Insert foreign or dirty objects into the interface

World Headquarters:

358 Hall Avenue, Wallingford, CT 06492 | Fax: 203-949-8423
 Tel: 203-949-8400 , 1-800-867-2629 | International: 203-949-8503



TMC Building 4, No. 318 Yuanshan Road, Xinzhuang Industrial Park,
 Shanghai, China 201108 | Tel: 86-21-5176-1209 | Fax: 86-21-64424098

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Cable Assemblies](#) category:

Click to view products by [Amphenol](#) manufacturer:

Other Similar products are found below :

[73-6352-10](#) [73-6353-3](#) [73-6364-6](#) [R285001001](#) [R288940004](#) [R288940005](#) [145111-05-12.00](#) [1661-C-24](#) [1801171170914KE](#) [24P104C24J1-012](#) [24P104C24P1-006](#) [24P104C24P1-018](#) [24P204C24J1-003](#) [172-2150-EX](#) [1800920920914PJ](#) [FCB-3030-ALT](#) [21117-046](#) [21117-050](#) [PCX-24-50](#) [24P103C24P2-003](#) [25P203C25P2-003](#) [PTWY-24-78](#) [R284008001](#) [R285001021](#) [R285426000](#) [R288940003](#) [R288940008](#) [RF179-74BJ3-77RP1-0305](#) [4814-BB-24](#) [5260-72](#) [JT2N1-CL1-1F](#) [DLP-COAX1](#) [4814-K-48](#) [115101-09-06.00](#) [CCNTN2-MM-LL335-26](#) [73-6351-25](#) [73-6352-3](#) [73-6353-25](#) [1800920920610PJ](#) [GD0BQ0BQ024.0](#) [1-3636-600-5210](#) [TL8A-11SMA-11SMA-01500-51](#) [R284C0351060](#) [R288940009](#) [R284C0351028](#) [R288940002](#) [9702-1SL-1](#) [PT82NSMA](#) [73-6353-10](#) [R285020301W](#)