

BAT54W, BAT54AW, BAT54CW, BAT54SW

SURFACE MOUNT SCHOTTKY BARRIER

VOLTAGE 30 Volts

CURRENT 0.2 Ampers

PACKAGE SOT-323

FEATURES

- Low turn-on voltage
- Fast switching
- PN Junction Guard Ring for Transient and ESD Protection.


MECHANICAL DATA

Case: SOT-323, Plastic

Terminals: Solderable per MIL-STD-202, Method 208

Approx. Weight: 0.008 gram

Marking: L4, L42, L43, L44

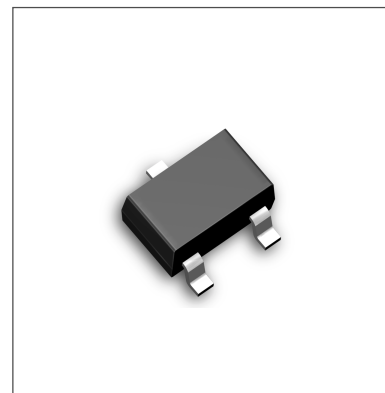


MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.






For capacitive load, derate current by 20%.

Parameter	Symbol	BAT54W	BAT54AW	BAT54CW	BAT54SW	Units
Peak Repetitive Reverse Voltage	V_{RRM}	30	30	30	30	V
Maximum Average Forward Current at $T_a=25^{\circ}\text{C}$	I_o	0.2	0.2	0.2	0.2	A
Peak Forward Surge Current, 8.3ms single half sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	0.6	0.6	0.6	0.6	A
Maximum Instantaneous Forward Voltage	V_F	0.32 @ $I_F=0.001\text{A}$ 1.0 @ $I_F=0.1\text{A}$				V
Maximum DC Reverse Current at Rated DC Blocking Voltage	I_R	0.002 @ $V_R=25\text{V}$				mA
Thermal Resistance, Junction to Ambient Air	$R_{\theta JA}$	635				$^{\circ}\text{C} / \text{W}$
Operating Junction Temperature Range	T_J	-55 TO +125				$^{\circ}\text{C}$
Storage Temperature Range	T_{STG}	-55 TO +125				$^{\circ}\text{C}$

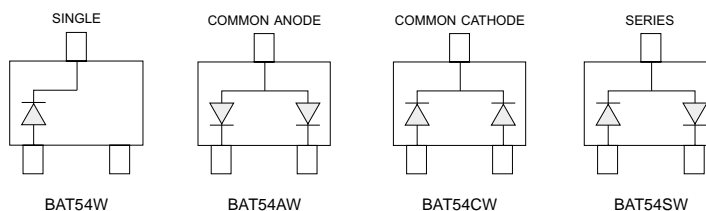

BAT54W, BAT54AW, BAT54CW, BAT54SW


SURFACE MOUNT SCHOTTKY BARRIER

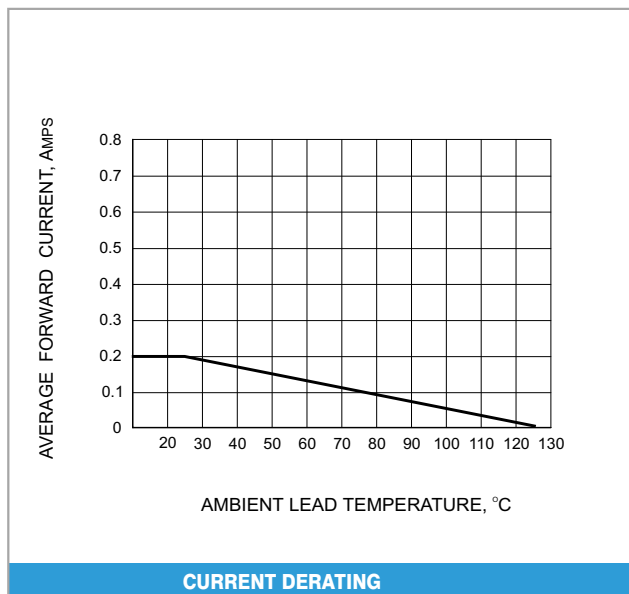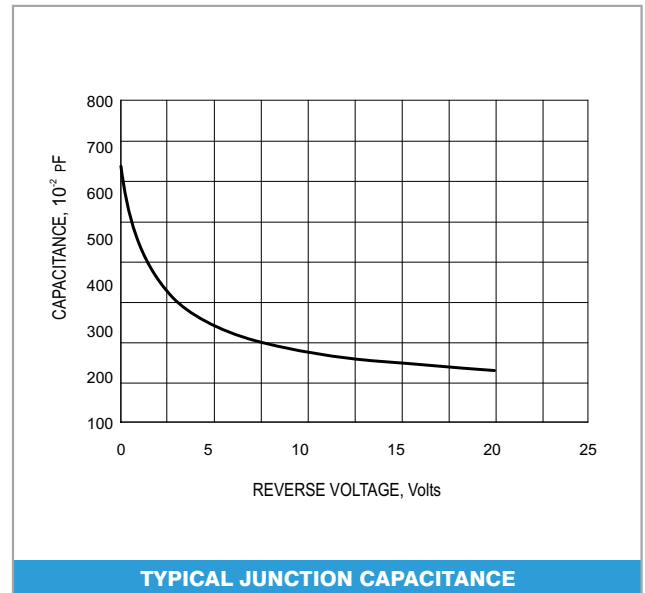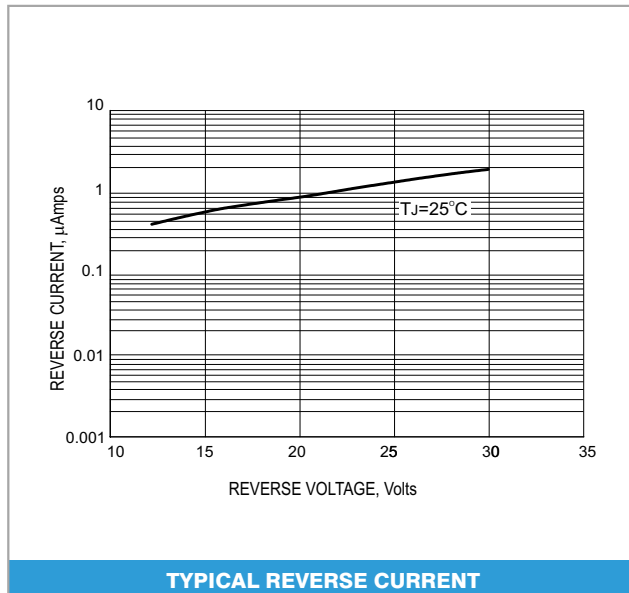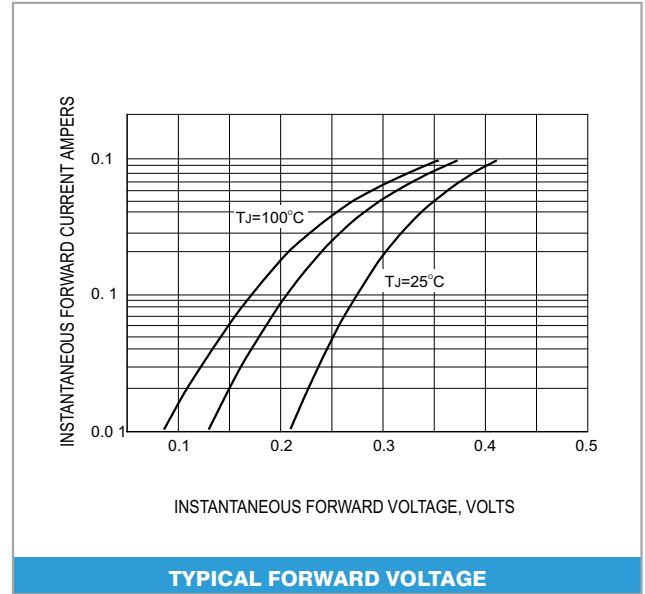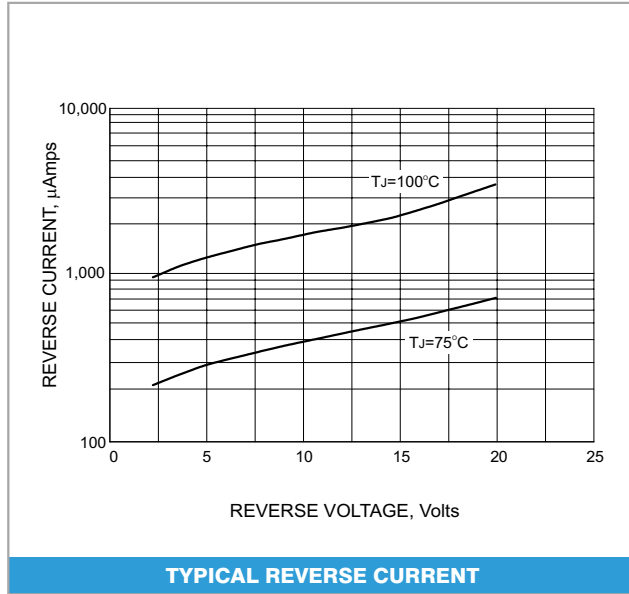

BAT54W, BAT54AW, BAT54CW, BAT54SW

SURFACE MOUNT SCHOTTKY BARRIER

SOT-323

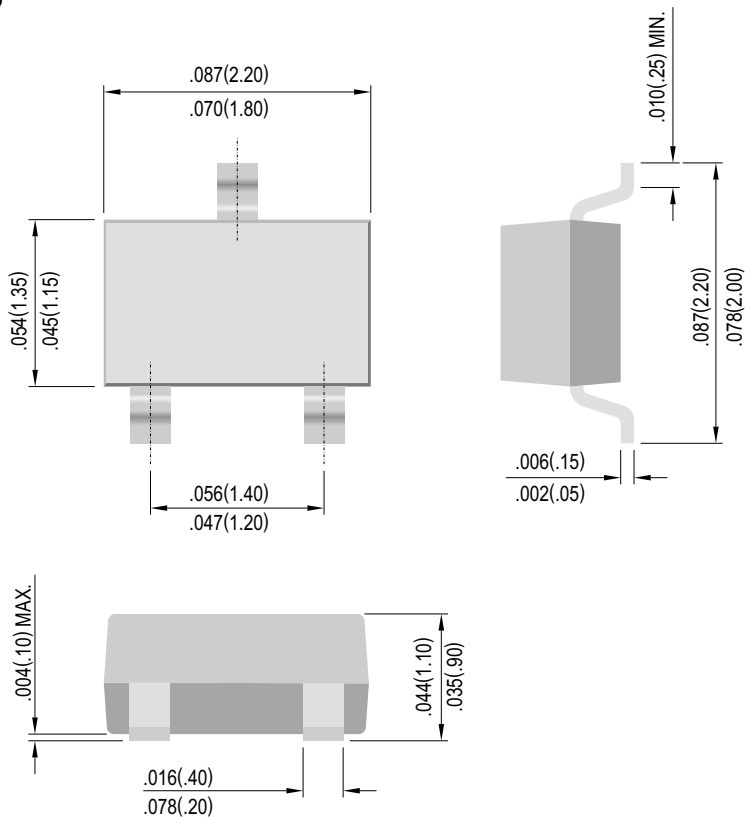

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Schottky Diodes & Rectifiers](#) category:

Click to view products by [amsem](#) manufacturer:

Other Similar products are found below :

[MA4E2039](#) [MMBD301M3T5G](#) [RB160M-50TR](#) [D83C](#) [BAS16E6433HTMA1](#) [BAS 3010S-02LRH E6327](#) [BAT 54-02LRH E6327](#)
[NRVBAF360T3G](#) [NSR05F40QNXT5G](#) [NTE555](#) [JANS1N6640](#) [SS3003CH-TL-E](#) [GA01SHT18](#) [CRS10I30A\(TE85L,QM](#) [MBRA140TRPBF](#)
[MBRB30H30CT-1G](#) [BAT 15-04R E6152](#) [JANTX1N5712-1](#) [DMJ3940-000](#) [SB007-03C-TB-E](#) [NRVBB20100CTT4G](#) [NRVBM120LT1G](#)
[NTSB30U100CT-1G](#) [CRG04\(T5L,TEMQ\)](#) [ACDBA1100LR-HF](#) [ACDBA1200-HF](#) [ACDBA240-HF](#) [ACDBA3100-HF](#) [CDBQC0530L-HF](#)
[ACDBA260LR-HF](#) [ACDBA1100-HF](#) [10BQ015-M3/5BT](#) [NRVBM120ET1G](#) [VSSB410S-M3/5BT](#) [1N5819T-G](#) [PDS1040Q-13](#) [B160BQ-13-F](#)
[SDM05U20CSP-7](#) [BAS 70-07 E6433](#) [B140S1F-7](#) [HSM560Je3/TR13](#) [DDB2265-000](#) [ZHCS506QTA](#) [HSM190Je3/TR13](#) [B330AF-13](#)
[ACDBUC0230-HF](#) [SDM1U100S1F-7](#) [MBR10200CTF-G1](#) [CDLL5712](#) [DMF2822-000](#)