

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [30490-1002](#)
Status: **Active**
Overview: [Mini-Fit Jr.™ Power Connectors](#)
Description: Mini-Fit® Grounding Pin, 18-24 AWG, Reel, Phosphor Bronze , Tin or Select Gold (Au)

Documents:

[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

General

Product Family	Crimp Terminals
Series	30490
Application	Power
Comments	Grounding Pin
Crimp Quality Equipment	Yes
Overview	Mini-Fit Jr.™ Power Connectors
Product Name	Mini-Fit®
UPC	800754373463

Physical

Gender	Male
Material - Metal	Phosphor Bronze
Material - Plating Mating	Gold
Material - Plating Termination	Tin-Lead
Net Weight	0.151/g
Packaging Type	Reel
Plating min - Mating	0.762µm
Termination Interface: Style	Crimp or Compression
Wire Insulation Diameter	1.30-3.10mm
Wire Size AWG	18, 20, 22, 24
Wire Size mm²	N/A

Electrical

Current - Maximum per Contact	9.0A
-------------------------------	------

Material Info

Reference - Drawing Numbers

Sales Drawing	SD-30490-***2
---------------	---------------

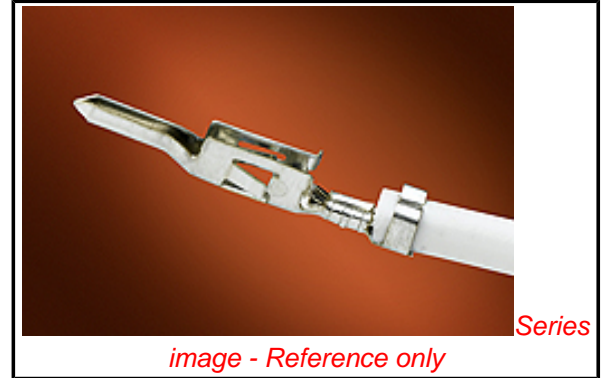


image - Reference only

EU RoHS

**ELV and RoHS
Compliant**

**REACH SVHC
Contains SVHC: No
Low-Halogen Status
Low-Halogen**

China RoHS



**Need more information on product
environmental compliance?**

Email productcompliance@molex.com
 For a multiple part number RoHS Certificate of
 Compliance, [click here](#)

Please visit the [Contact Us](#) section for any
 non-product compliance questions.

Search Parts in this Series

[30490Series](#)

Mates With

[5556](#) Mini-Fit® Crimp Terminal, [44485](#)
 Series

Use With

Mini-Fit Jr.™ Plug Housing [5559](#) Single
 Row, [30068](#) , [5559d](#)

Application Tooling | FAQ

*Tooling specifications and manuals are
 found by selecting the products below.
 Crimp Height Specifications are then
 contained in the Application Tooling
 Specification document.*

Global

Description	Product #
Extraction Tool	0011030044
Hand Crimp Tool for Male and Female Crimp Terminals, 16-24 AWG Wire	0638190900

FineAdjust™ Applicator for Insulation OD 2.50-2.95mm, 18-24 AWG Wire	<u>0639002600</u>
FineAdjust™ Applicator for Insulation OD 1.65-2.05mm, 18-24 AWG Wire	<u>0639002900</u>
FineAdjust™ Applicator for Insulation OD 1.90-2.30mm - 18-24 AWG	<u>0639015600</u>
FineAdjust™ Applicator for Insulation OD 1.40-1.70mm - 18-24 AWG	<u>0639023900</u>
FineAdjust™ Applicator for Insulation OD 2.50-2.95mm Optimized for 18 AWG Only	<u>0639024800</u>
FineAdjust™ Applicator for Insulation OD 2.30-2.60mm - 18-24 AWG	<u>0639024900</u>
T2 Terminator™ for insulation OD 2.50-2.95mm - 18-24 AWG	<u>0639102600</u>
T2 Terminator™ for insulation OD 1.65 – 2.05mm – 18 – 24 AWG	<u>0639102900</u>
T2 Terminator™ for insulation OD 1.90-2.30mm - 18-24 AWG	<u>0639115600</u>
T2 Terminator™ for insulation OD 1.40-1.70mm - 18-24 AWG	<u>0639123900</u>
T2 Terminator™ for insulation OD 2.50-2.95mm optimized for 18 AWG only	<u>0639124800</u>
T2 Terminator™ for insulation OD 2.30-2.60mm - 18-24 AWG	<u>0639124900</u>

This document was generated on 04/17/2015

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [molex](#) manufacturer:

Other Similar products are found below :

[60506-C-50](#) [73108](#) [72903](#) [1062837003](#) [0533241060](#) [68301-1017](#) [71506-C](#) [880504](#) [387790039](#) [53254-0710](#) [85071-0017](#) [387204903](#)
[783472003](#) [514412093](#) [0026482195](#) [0191310031](#) [503308-4410](#) [0008650814](#) [791099208](#) [0039000218](#) [89762-1403](#) [89762-1542](#) [89762-1582](#)
[0011404526](#) [00136](#) [0022173102](#) [0026615060](#) [CR4006A30M003](#) [0039532085](#) [58098-0628](#) [0003092041](#) [0008520123](#) [0011030025](#)
[0011184017](#) [0022162060](#) [0022552102](#) [01312](#) [M15730061](#) [61432](#) [6150300002](#) [CS63W64](#) [CS8264N](#) [CS8365N](#) [CS8369](#) [62201-8780](#) [62500-1774](#) [M37730026](#) [63103-50](#) [63443-2215](#) [63443-3160](#)