



## CATHODE & GATE LEAD KITS

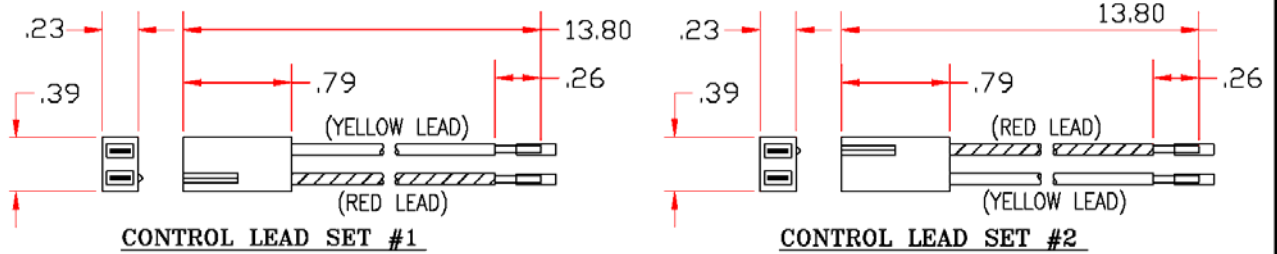

1. WIRE COMPOSITION:  
 AWG 22, TINNED COPPER STRANDED WIRE WITH ETEF INSULATION RATED TO 125° C.
2. LEAD COLOR:  
 RED (CATHODE) AND YELLOW (GATE). RED LEAD IS POSITIONED NEXT TO KEY ON BLACK POLARIZED HOUSING.
3. RECEPTACLES:  
 FEMALE TERMINAL WITH LOCKING TAB FITS .11 x .03 IN. BLADES.

LEAD KIT TO ORDER	ORDER FOR MODULE	DESCRIPTION
LEAD KIT #NK	LD43-ND43-CD63-PD43 (FULL CONTROL)	LEAD SET 1 & LEAD SET 2 – ONE EACH/MODULE
LEAD KIT #NL	LD42-LS43-ND42-CD62 (HALF CONTROL)	LEAD SET 1 – ONE/MODULE
LEAD KIT #NM	LD47-ND47-CD67-PS43 (HALF CONTROL)	LEAD SET 2 – ONE/MODULE

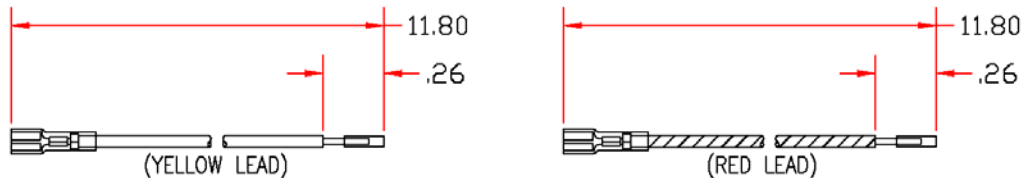

1. WIRE COMPOSITION:  
 AWG 22, TINNED COPPER STRANDED WIRE WITH ETEF INSULATION RATED TO 125° C.
2. LEAD COLORS:  
 RED (CATHODE) AND YELLOW (GATE). BOTH WITH INSULATED TERMINALS.
3. RECEPTACLES:  
 FEMALE TERMINAL WITH NYLON INSULATOR THAT FITS .11 x .03 IN. BLADE.

LEAD KIT TO ORDER	ORDER FOR MODULE	DESCRIPTION
LEAD KIT #MQ	CD43 (FULL CONTROL)	TWO RED & TWO YELLOW LEADS PER MODULE.
LEAD KIT #MR	CD42-CD47 (HALF CONTROL)	ONE RED AND ONE YELLOW LEAD PER MODULE

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [powerex manufacturer](#):*

Other Similar products are found below :

[R7013003XXUA](#) [R9G01212XX](#) [VLA541-01R](#) [QRD0630T30](#) [CM400DY-24NF](#) [CM100TX-24S1](#) [CM600HA-24A](#) [NLD422PB](#)  
[PSM03S93E5-A](#) [BP2B-V](#) [ND431625](#) [R5031213LSWS](#) [BG2B](#) [BG2C-5015](#) [ND431825](#) [T9G0121203DH](#) [CD611616C](#) [BG1A-PX](#)  
[TCS4402802DH](#) [CD421690C](#) [PM600DVA060](#) [CD411899C](#) [CD631615B](#) [C601PB](#) [R5021213LSWS](#) [BG2A-NFH](#) [C180PB](#) [CD431690B](#)  
[NLR425CM](#) [HARDWARE KIT 50](#) [CD410899C](#) [CM400HA-24A](#) [CD411699C](#) [LEAD KIT #NK](#) [HARDWARE KIT 49](#) [VLA500-01](#)  
[HARDWARE KIT 87](#) [VLA502-01](#) [VLA106-24154](#) [VLA106-15242](#)