


Thermally conductive foil both sides adhesive

- good thermal characteristics
- double-sided adhesive layers
- replaces mechanical fastenings
- cuttings and cut-outs upon request

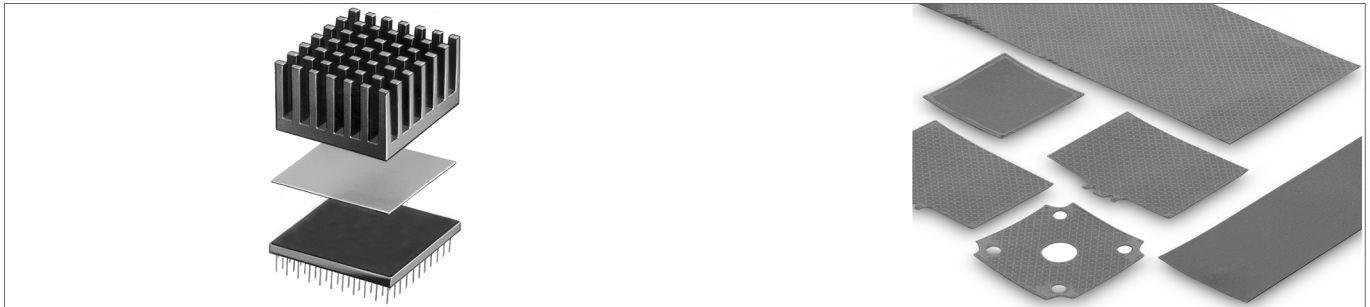

art. no.	version	width [mm]	art. no.	version	width [mm]
WLFT 404 R25	running metre	25	WLFT 405 R25	running metre	25
WLFT 404 R50	running metre	50	WLFT 405 R50	running metre	50
WLFT 404 R100	running metre	100	WLFT 405 R100	running metre	100
WLFT 404 R200	running metre	200	WLFT 405 R200	running metre	200

art. no.	version	dimensions [mm]	art. no.	version	dimensions [mm]
WLFT 404 100x100	plate	100 x 100	WLFT 405 100x100	plate	100 x 100
WLFT 404 100x200	plate	100 x 200	WLFT 405 100x200	plate	100 x 200
WLFT 404 200x200	plate	200 x 200	WLFT 405 200x200	plate	200 x 200

Technical data

	WLFT 404	WLFT 405
description	isolations, double-sided adhesive	non isolations, double-sided adhesive
complete thickness	0.127 (± 0.03) mm	0.15 (± 0.03) mm
truss material	polyimide (kapton MT) 0.025 mm	aluminium foil 0.05 mm
glue layer	acrylate (pressure sensitive) double-sided	acrylate (pressure sensitive) double-sided
specific thermal resistance	3.7 °C cm ² /W	3.4 °C cm ² /W
thermal conductivity	0.37 W/mK	0.5 W/mK
snap through stability	5 KV/mm	–
holding force (overlapping)	0.86 MPa	0.93 MPa
holding force (shear rate)	Al 25 °C 0.897 [MPa]/ Al 150 °C 0.345 [MPa]/ Cu 25 °C 0.828 [MPa]/ Cu 150 °C 0.31 [MPa]/ Al₂O₃ 25 °C 1.17 [MPa]/ Al₂O₃ 150 °C 0.34 [MPa]	Al 25 °C 0.86 [MPa]/ Al 150 °C 0.38 [MPa]/ Cu 25 °C 1.1 [MPa]/ Cu 150 °C 0.48 [MPa]/ Al₂O₃ 25 °C 1.0 [MPa]/ Al₂O₃ 150 °C 0.41 [MPa]
temperature range	-40 °C ... +150 °C	-40 °C ... +150 °C
flammability	UL 94 V-0	UL 94 V-0

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [fisher manufacturer](#):

Other Similar products are found below :

[FR 105 52 220 ME](#) [FR 120 42 200 ME](#) [GEL 28 30](#) [GEL 45 10](#) [GEL 45 50](#) [GEL 60 10](#) [AKG 33 20 80 ME](#) [AKG 69 24 100 ME](#) [BL 16 SMD](#)
[067 12](#) [ICKSR40X30](#) [CAB 5 05 GS](#) [LA 17 150 230](#) [LA 21 150 230](#) [LA 21 150 24](#) [LA 27 K 100 12](#) [LA 27 K 100 24](#) [LA 27 K 150 12](#) [LA 27](#)
[K 50 24](#) [SK4615AL](#) [SK56920AL](#) [SK57225SA](#) [SK57720AL](#) [SK57850SA](#) [SK58420AL](#) [SK58437.5SA](#) [SK 622 1000 AL](#) [SK 622 1000 SA](#)
[SK 622 100 AL](#) [SK 623 100 SA](#) [SK 626 1000 SA](#) [SK 627 1000 AL](#) [SK 627 200 AL](#) [SK 627 200 SA](#) [SK 627 50 SA](#) [SK 636 100 AL](#) [SK LED](#)
[R 65 SA](#) [SK LED R 80 SA](#) [AKG 69 24 100 SA](#) [AKG 69 24 50 SA](#) [AKG 71 24 80 ME](#) [FR 80 42 160 ME](#) [GE K 80 42 100 SA](#) [GEL 10](#) [GEL](#)
[45 30](#) [GEL 60 25](#) [GEL F 15 10](#) [TUF 120 42 220 ME](#) [TUF 55 16 200 SA](#) [CAB 5 ZS](#) [CAB 9 GS](#)