

# PANEL MOUNT INDICATOR, NON-RELAMPABLE

## LED TECHNOLOGY


MOUNTING HOLE, Ø 0.500"

PART NO.	LENS COLOR	VOLTAGE	CURRENT [mA]	RATED LIFE HOURS
<b>LED 6V SERIES</b>				
WL-6391Q2M1-6V	RED	5V-6V	20mA	100,000
WL-6391Q2M3-6V	AMBER	5V-6V	20mA	100,000
WL-6391Q2M5-6V	GREEN	5V-6V	20mA	100,000
WL-6391Q2M6-6V	BLUE	5V-6V	20mA	100,000
WL-6391Q2M4-6V	WHITE	5V-6V	20mA	100,000
<b>LED 12V SERIES</b>				
WL-6391Q2M1-12V	RED	12V-14V	20mA	100,000
WL-6391Q2M3-12V	AMBER	12V-14V	20mA	100,000
WL-6391Q2M5-12V	GREEN	12V-14V	20mA </td <td>100,000</td>	100,000
WL-6391Q2M6-12V	BLUE	12V-14V	20mA	100,000
WL-6391Q2M4-12V	WHITE	12V-14V	20mA	100,000
<b>LED 24V SERIES</b>				
WL-6391Q2M1-24V	RED	24V-28V	20mA	100,000
WL-6391Q2M3-24V	AMBER	24V-28V	20mA	100,000
WL-6391Q2M5-24V	GREEN	24V-28V	20mA	100,000
WL-6391Q2M6-24V	BLUE	24V-28V	20mA	100,000
WL-6391Q2M4-24V	WHITE	24V-28V	20mA	100,000

## NOTES

1. Recommended panel thickness  
0.031" to 0.125"
2. .250 x .032 terminals are standard
3. Storage temperature  
 $T_{STG}$ : -25°C - +80°C
4. Ambient temperature  
 $T_A$ : -20°C - +60°C
5. Voltage tolerance  
 $V_{OP}$ : ±10%
6. DC operation only
7. Body material  
Polycarbonate, white
8. Lens material  
Polycarbonate
9. Bezel material  
Stainless steel
10. Terminals  
Quick-connect, tinned brass
11. Gaskets  
Buna-N
12. Mounting hardware (nut, lock washer, and gasket) included

## DIMENSIONAL CHARACTERISTICS

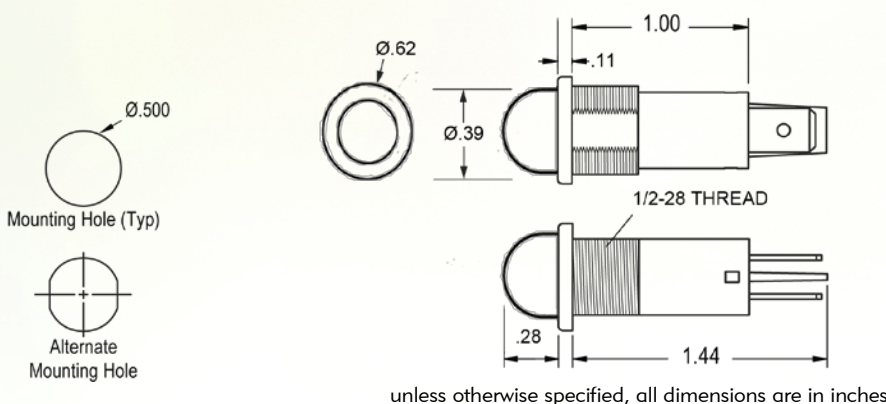

## CERTIFICATIONS

UL (E340667), RoHS



- Splash proof
- Outdoor applications
- NEMA 3-R



## OPTIONS

Additional options and lens styles available. Please contact Wamco for more information.



## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [wamco manufacturer](#):*

Other Similar products are found below :

[WL-2195A5-28V](#) [WL-19041351](#) [WL-B05I03L0300](#) [WL-1090D1-12V](#) [WL-1061QC1](#) [WL-192A1250](#) [WL-2153A5](#) [WL-19012353](#) [WL-19010351](#) [WL-19210250](#) [WL-19091352](#) [WL-19040352](#) [WL-19040252](#) [WL-1090QC4-28V](#) [WL-19050352](#) [WL-1090QC3-28V](#) [WL-B05G10F0900](#) [WL-6091QM5-24V](#) [WL-19040257](#) [WL-19210350](#) [WL-19080255](#) [WL-192A0351](#) [WL-1090A1-28V](#) [WL-192A1350](#) [WL-19210251](#) [WL-19040451](#) [WL-19040353](#) [WL-19011352](#) [WL-19081350](#) [WL-192A0350](#) [WL-19040357](#) [WL-19050257](#) [WL-1062C1](#) [WL-1090A5-12V](#) [WL-19090350](#) [WL-1860235W3D](#) [WL-1051QC1](#) [WL-1052QC5](#) [WL-6391Q2D5-24V](#) [WL-2151A1](#) [WL-19090252](#) [WL-1032D5](#) [WL-192A1251](#) [WL-2191U5-12V](#) [WL-2152A5](#) [WL-19090355](#) [WL-6391Q2M3-12V](#) [WL-1060QC5](#) [WL-2150A3](#) [WL-19210351](#)