




**Compact Size
Panel Mount Indicator, Non-Relampable
LED Technology
Mounting Hole, Ø 0.310"**



All dimensions are in inches

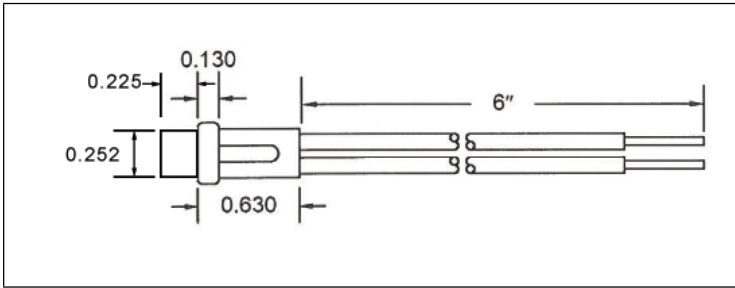

Minimum panel thickness: 0.030"

6" leads with 1/2" strip are standard
Due to compact size, components (resistors, diodes)
will be installed in the leads.

Storage temperature T_{STG} : -25°C - +80°C
Ambient temperature T_A : -20°C - +60°C
Voltage tolerance V_{OP} : ±10%

Part No.	Lens Color	Voltage (DC)	Current (mA)	Rated Life
LED 6V Series				
WL-2191SL1-6V	Red	5V-6V	20mA	100,000 Hrs
WL-2191SL5-6V	Green	5V-6V	20mA	100,000 Hrs
WL-2191SL6-6V	Blue	5V-6V	20mA	100,000 Hrs
WL-2191SL7-6V	Yellow	5V-6V	20mA	100,000 Hrs
LED 12V Series				
WL-2191SL1-12V	Red	12V-14V	20mA	100,000 Hrs
WL-2191SL5-12V	Green	12V-14V	20mA	100,000 Hrs
WL-2191SL6-12V	Blue	12V-14V	20mA	100,000 Hrs
WL-2191SL7-12V	Yellow	12V-14V	20mA	100,000 Hrs
LED 24V Series				
WL-2191SL1-24V	Red	24V-28V	20mA	100,000 Hrs
WL-2191SL5-24V	Green	24V-28V	20mA	100,000 Hrs
WL-2191SL6-24V	Blue	24V-28V	20mA	100,000 Hrs
WL-2191SL7-24V	Yellow	24V-28V	20mA	100,000 Hrs

Body Material: Nylon, white
Lens Material: Polycarbonate
Bezel Material: Chrome
Wire Gauge: 18 AWG
Wire Strip: 1/2"
Anode(+): Red lead
Notes: Tinnerman clips available separately.

Certifications: Most Wamco indicators carry Agency approvals. Please contact Wamco for the latest Agency information regarding the specific product series and voltage required.
Options: Additional options and lens styles available. Please contact Wamco for more information.

Drawn	SC	04/04/12	Compact Size Panel Mount Indicators LED	Datasheet: WL-2191SLX-XXX Series	Rev: 1
Checked	EB	04/04/12			
Approved	EB	04/05/12			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wamco manufacturer](#):

Other Similar products are found below :

[WL-2195A5-28V](#) [WL-19041351](#) [WL-B05I03L0300](#) [WL-1090D1-12V](#) [WL-1061QC1](#) [WL-192A1250](#) [WL-2153A5](#) [WL-19012353](#) [WL-19010351](#) [WL-19210250](#) [WL-19091352](#) [WL-19040352](#) [WL-19040252](#) [WL-1090QC4-28V](#) [WL-19050352](#) [WL-1090QC3-28V](#) [WL-B05G10F0900](#) [WL-6091QM5-24V](#) [WL-19040257](#) [WL-19210350](#) [WL-19080255](#) [WL-192A0351](#) [WL-1090A1-28V](#) [WL-192A1350](#) [WL-19210251](#) [WL-19040451](#) [WL-19040353](#) [WL-19011352](#) [WL-19081350](#) [WL-192A0350](#) [WL-19040357](#) [WL-19050257](#) [WL-1062C1](#) [WL-1090A5-12V](#) [WL-19090350](#) [WL-1860235W3D](#) [WL-1051QC1](#) [WL-1052QC5](#) [WL-6391Q2D5-24V](#) [WL-2151A1](#) [WL-19090252](#) [WL-1032D5](#) [WL-192A1251](#) [WL-2191U5-12V](#) [WL-2152A5](#) [WL-19090355](#) [WL-6391Q2M3-12V](#) [WL-1060QC5](#) [WL-2150A3](#) [WL-19210351](#)