

SMT PHEMT LOW NOISE AMPLIFIER, 9 - 18 GHz

Typical Applications


The HMC516LC5 is ideal for use as a LNA or driver amplifier for:

- Point-to-Point Radios
- Point-to-Multi-Point Radios & VSAT
- Test Equipment and Sensors
- Military

Features

- Noise Figure: 2 dB
- Gain: 20 dB
- OIP3: +25 dBm
- Single Supply: +3V @ 65 mA
- 50 Ohm Matched Input/Output
- RoHS Compliant 5x5 mm Package

Functional Diagram

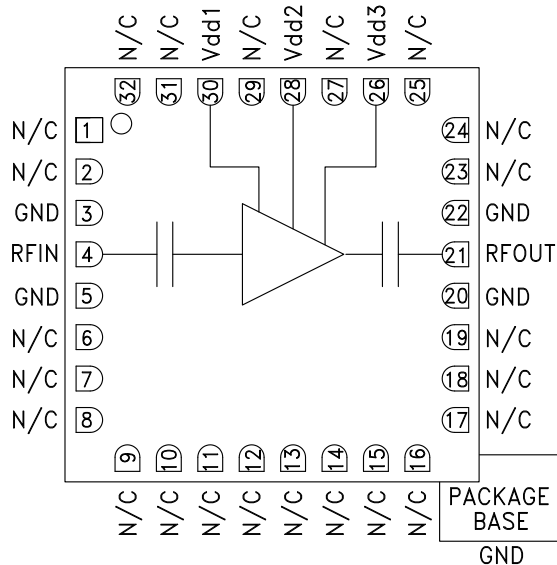

General Description

The HMC516LC5 is a high dynamic range GaAs pHEMT MMIC Low Noise Amplifier (LNA) housed in a leadless “Pb free” RoHS compliant SMT package. The HMC516LC5 provides 20 dB of small signal gain, 2 dB of noise figure and has an output IP3 of +25 dBm. The P1dB output power of +13 dBm enables the LNA to also function as a LO driver for balanced, I/Q or image reject mixers. The HMC516LC5 allows the use of surface mount manufacturing techniques.

Electrical Specifications, $T_A = +25^\circ C$, Vdd 1, 2, 3 = +3V


| Parameter | Min. | Typ. | Max. | Min. | Typ. | Max. | Units |
|--|--------|-------|---------|------|-------|-------|-------|
| Frequency Range | 9 - 12 | | 12 - 18 | | | | GHz |
| Gain | 17.5 | 20 | | 18 | 20.5 | | dB |
| Gain Variation Over Temperature | | 0.015 | 0.025 | | 0.015 | 0.025 | dB/°C |
| Noise Figure | | 2.0 | 2.5 | | 2.0 | 2.5 | dB |
| Input Return Loss | | 10 | | | 10 | | dB |
| Output Return Loss | | 12 | | | 12 | | dB |
| Output Power for 1 dB Compression (P1dB) | | 13 | | | 14 | | dBm |
| Saturated Output Power (P _{sat}) | | 15 | | | 16 | | dBm |
| Output Third Order Intercept (IP3) | | 25 | | | 25 | | dBm |
| Supply Current (I _{dd})(V _{dd} = +3V) | | 65 | 88 | | 65 | 88 | mA |

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.


For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106
 Phone: 781-329-4700 • Order online at www.analog.com
 Application Support: Phone: 1-800-ANALOG-D

**SMT PHEMT LOW NOISE
AMPLIFIER, 9 - 18 GHz**


Broadband Gain & Return Loss

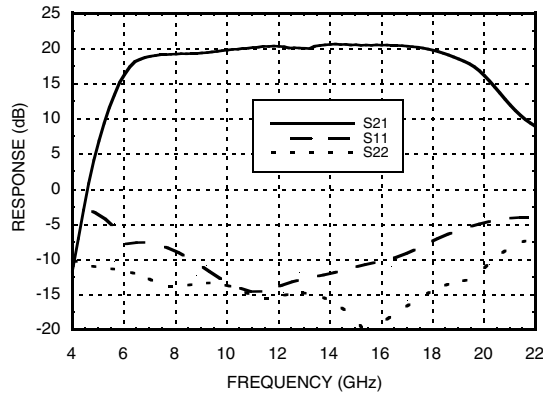


Gain vs. Temperature

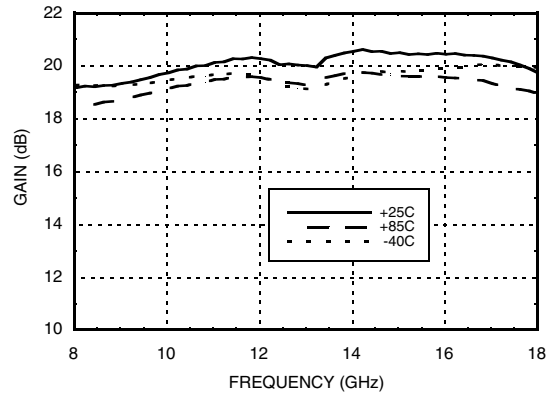


Input Return Loss vs. Temperature

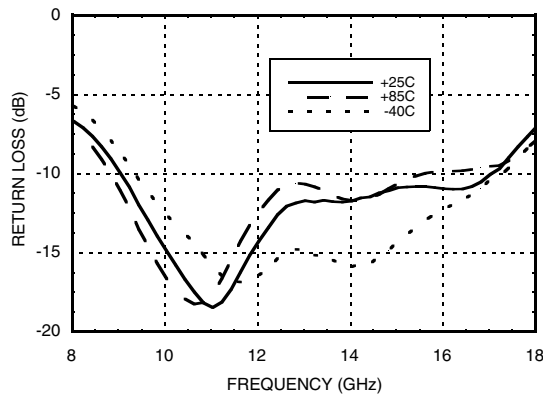


Output Return Loss vs. Temperature

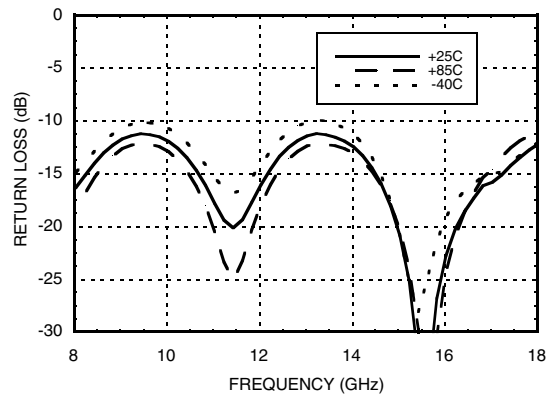

Noise Figure vs. Temperature

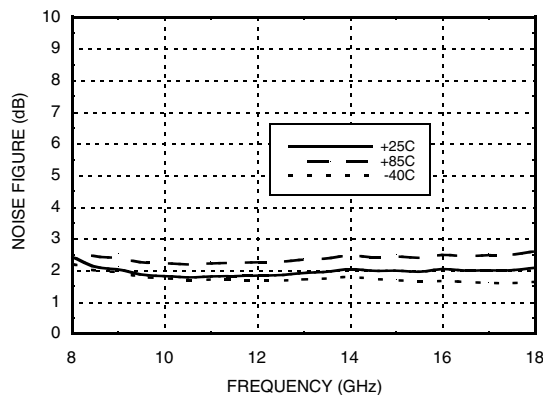


Output IP3 vs. Temperature

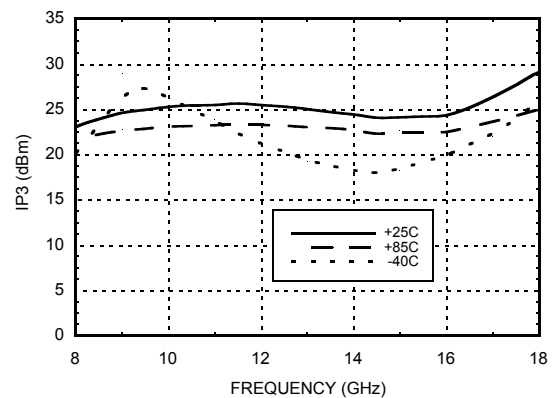


SMT PHEMT LOW NOISE AMPLIFIER, 9 - 18 GHz


P1dB vs. Temperature

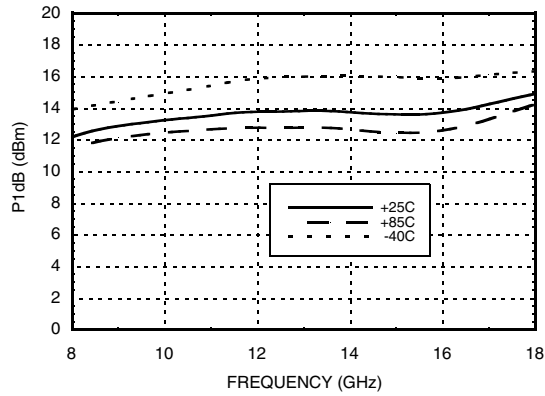


Psat vs. Temperature

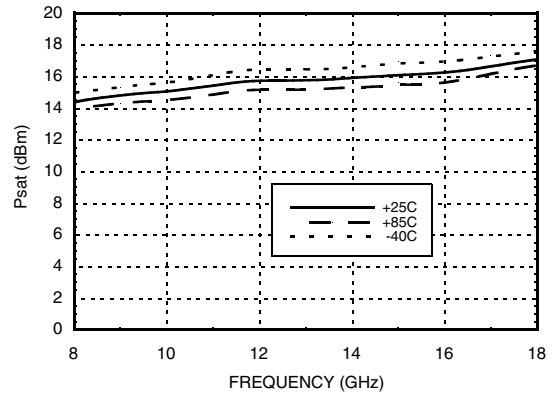


Reverse Isolation vs. Temperature

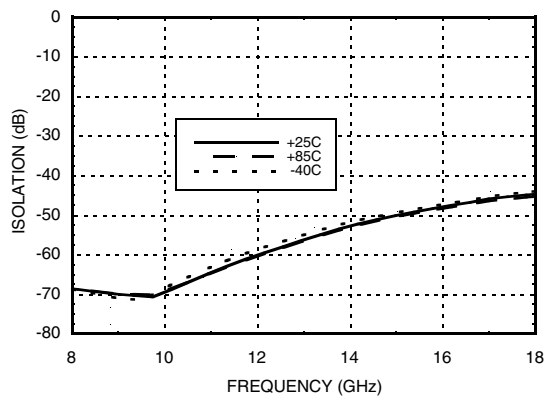

Power Compression @ 12 GHz

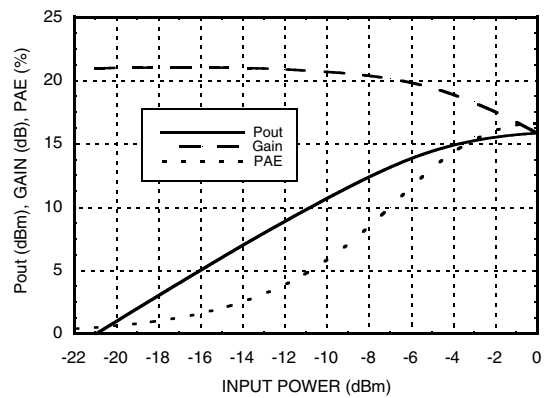

Gain, Noise Figure & Power vs. Supply Voltage @ 12 GHz

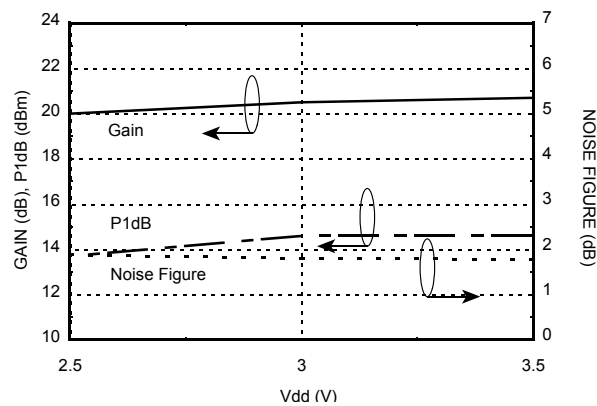

SMT PHEMT LOW NOISE AMPLIFIER, 9 - 18 GHz

Absolute Maximum Ratings

| | |
|--|----------------|
| Drain Bias Voltage (Vdd1, Vdd2, Vdd3) | +4 Vdc |
| RF Input Power (RFIN)(Vdd = +3.0 Vdc) | +5 dBm |
| Channel Temperature | 175 °C |
| Continuous Pdiss (T= 85 °C) (derate 14 mW/°C above 85 °C) | 1.17W |
| Thermal Resistance (channel to die bottom) | 76.9 °C/W |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -40 to +85 °C |
| ESD Sensitivity (HBM) | Class 1A |

Typical Supply Current vs. Vdd


| Vdd (V) | Idd (mA) |
|---------|----------|
| +2.5 | 61 |
| +3.0 | 65 |
| +3.5 | 69 |

Note: Amplifier will operate over full voltage range shown above.



ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS

Outline Drawing

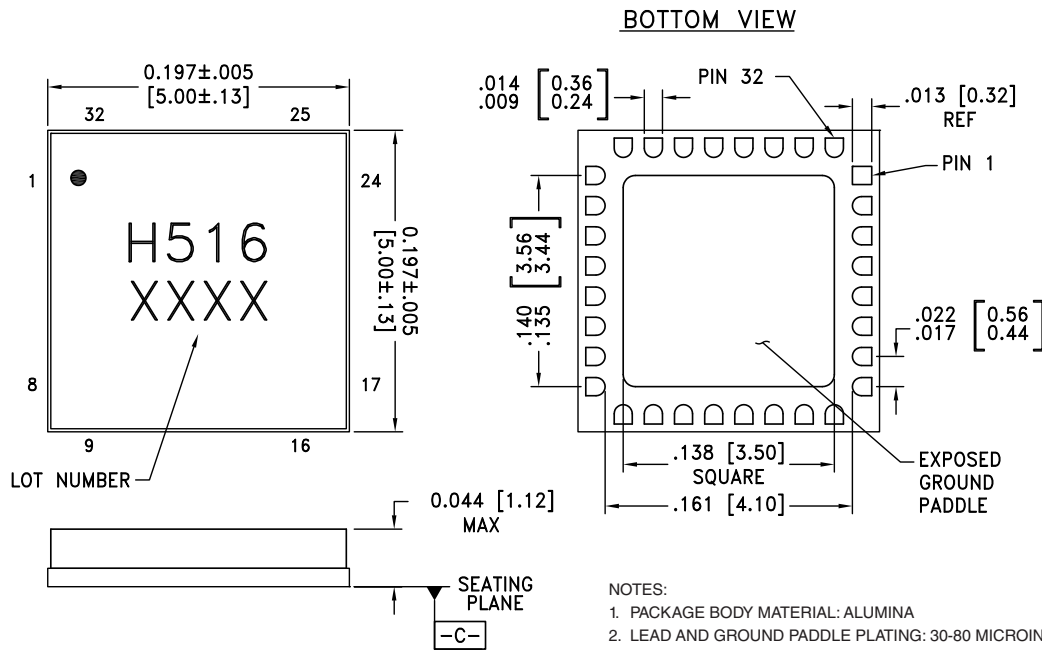

- NOTES:
1. PACKAGE BODY MATERIAL: ALUMINA
 2. LEAD AND GROUND PADDLE PLATING: 30-80 MICROINCHES GOLD OVER 50 MICROINCHES MINIMUM NICKEL
 3. DIMENSIONS ARE IN INCHES [MILLIMETERS]
 4. LEAD SPACING TOLERANCE IS NON-CUMULATIVE
 5. PACKAGE WARP SHALL NOT EXCEED 0.05mm DATUM
 6. ALL GROUND LEADS AND GROUND PADDLE MUST BE SOLDERED TO PCB RF GROUND

Package Information

| Part Number | Package Body Material | Lead Finish | MSL Rating | Package Marking ^[2] |
|-------------|-----------------------|------------------|---------------------|--------------------------------|
| HMC516LC5 | Alumina, White | Gold over Nickel | MSL3 ^[1] | H516 XXXX |

[1] Max peak reflow temperature of 260 °C

[2] 4-Digit lot number XXXX


SMT PHEMT LOW NOISE AMPLIFIER, 9 - 18 GHz

Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|---------------------------------------|------------|---|---------------------|
| 1, 2, 6 - 19, 23 - 25, 27, 29, 31, 32 | N/C | This pin may be connected to RF/DC ground. Performance will not be affected. | |
| 4 | RFIN | This pin is AC coupled and matched to 50 Ohms. | RFIN ○— — |
| 30, 28, 26 | Vdd1, 2, 3 | Power Supply Voltage for the amplifier. External bypass capacitors of 100 pF and 2.2 μF are required. | ○Vdd1,2,3 |
| 21 | RFOUT | This pin is AC coupled and matched to 50 Ohms. | — —○RFOUT |
| 3, 5, 20, 22 | GND | These pins and package bottom must be connected to RF/DC ground. | ○GND |


Application Circuit

| Component | Value |
|------------|--------|
| C1, C2, C3 | 100 pF |
| C4, C5, C6 | 2.2 μF |

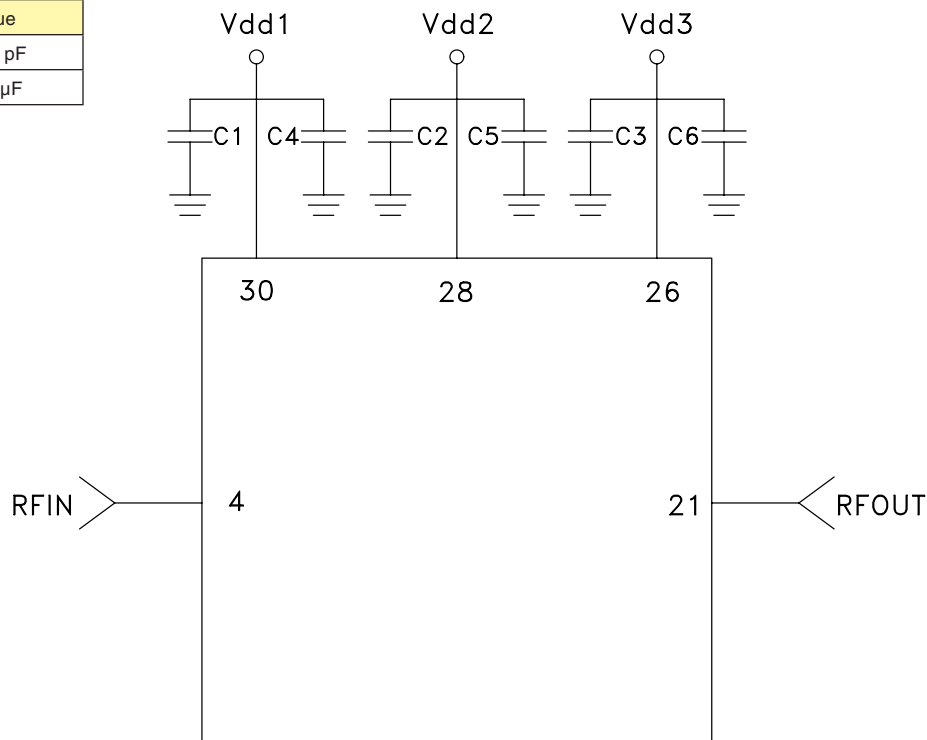

SMT PHEMT LOW NOISE AMPLIFIER, 9 - 18 GHz

Evaluation PCB

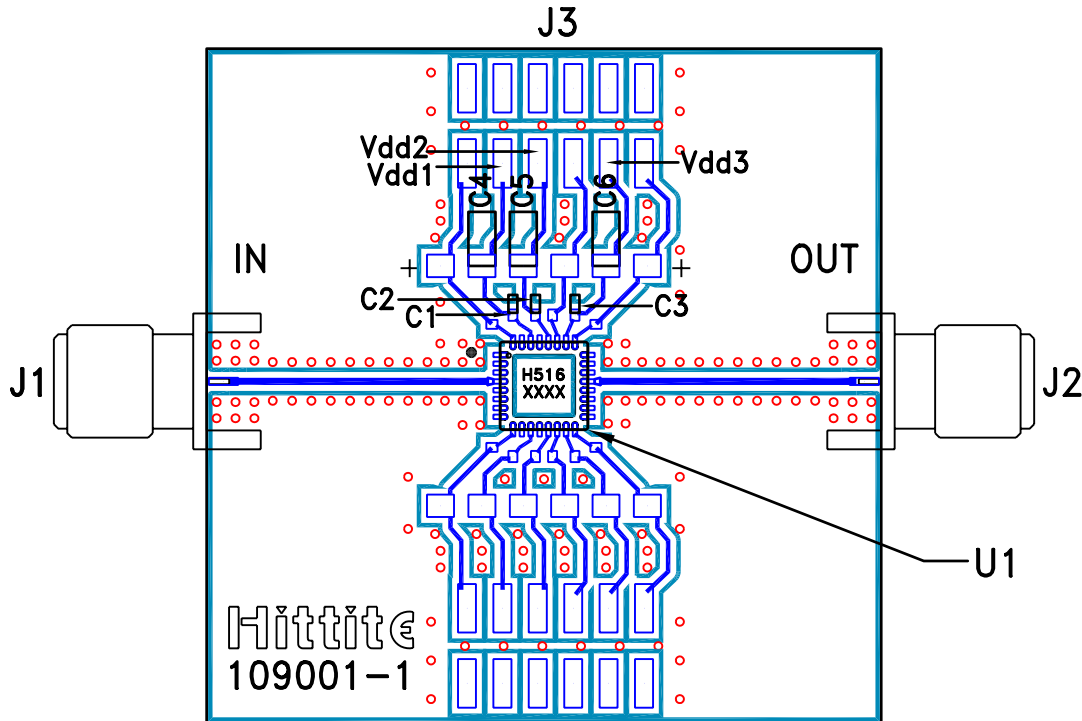

List of Materials for Evaluation PCB 110431 [1]

| Item | Description |
|---------|-----------------------------|
| J1 - J2 | PCB Mount K Connector |
| J3 | 2 mm DC Header |
| C1 - C3 | 100 pF Capacitor, 0402 Pkg. |
| C4 - C6 | 2.2 μF Capacitor, Tantalum |
| U1 | HMC516LC5 Amplifier |
| PCB [2] | 109001 Evaluation PCB |

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the application should use RF circuit design techniques. Signal lines should have 50 Ohm impedance while the package ground leads and exposed paddle should be connected directly to the ground plane similar to that shown. A sufficient number of via holes should be used to connect the top and bottom ground planes. The evaluation board should be mounted to an appropriate heat sink. The evaluation circuit board shown is available from Analog Devices, Inc., upon request.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Amplifier](#) category:

Click to view products by [Analog Devices](#) manufacturer:

Other Similar products are found below :

[A82-1](#) [BGA622H6820XTSA1](#) [BGA 728L7 E6327](#) [BGB719N7ESDE6327XTMA1](#) [HMC397-SX](#) [HMC405](#) [HMC561-SX](#) [HMC8120-SX](#)
[HMC8121-SX](#) [HMC-ALH382-SX](#) [HMC-ALH476-SX](#) [SE2433T-R](#) [SMA3101-TL-E](#) [SMA39](#) [A66-1](#) [A66-3](#) [A67-1](#) [A81-2](#) [LX5535LQ](#)
[LX5540LL](#) [MAAM02350](#) [HMC3653LP3BETR](#) [HMC549MS8GETR](#) [HMC576-SX](#) [HMC-ALH435-SX](#) [SMA101](#) [SMA32](#) [SMA411](#)
[SMA531](#) [SST12LP19E-QX6E](#) [WPM0510A](#) [HMC5879LS7TR](#) [HMC1087F10](#) [HMC1086](#) [HMC1016](#) [SMA1212](#) [MAX2689EWS+T](#)
[MAAMSS0041TR](#) [MAAM37000-A1G](#) [LTC6430AIUF-15#PBF](#) [SMA70-2](#) [SMA4011](#) [A231](#) [HMC-AUH232](#) [LX5511LQ](#) [LX5511LQ-TR](#)
[HMC7441-SX](#) [HMC-ALH310](#) [XD1001-BD-000V](#) [A4011](#)