




**Panel Mount Indicator, Non-Relampable
Neon and Incandescent Technology
Mounting Hole, Ø 0.500"**



All dimensions are in inches

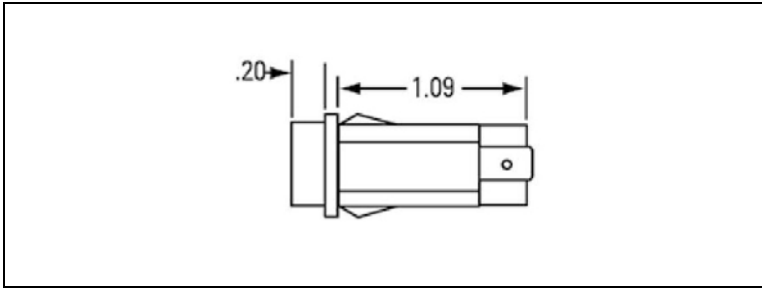

Recommended panel thickness: 0.030" to 0.090"

.187 terminals are standard

Storage temperature T_{STG} : -25°C - +80°C
 Ambient temperature T_A : -20°C - +60°C
 Voltage tolerance V_{OP} : ±10%

| Part No. | Lens Color | Voltage | Current mA | Rated Life |
|--------------------------------|------------|------------|------------|------------|
| Neon 115VAC Series | | | | |
| WL-1050QC1 | Red | 105-125VAC | 1.5mA | 25,000 Hrs |
| WL-1050QC2 | Clear | 105-125VAC | 1.5mA | 25,000 Hrs |
| WL-1050QC3 | Amber | 105-125VAC | 1.5mA | 25,000 Hrs |
| WL-1050QC4 | White | 105-125VAC | 1.5mA | 25,000 Hrs |
| WL-1052QC5 | Green | 105-125VAC | 1.5mA | 25,000 Hrs |
| Neon 230VAC Series | | | | |
| WL-1051QC1 | Red | 208-250VAC | 1.5mA | 25,000 Hrs |
| WL-1051QC3 | Amber | 208-250VAC | 1.5mA | 25,000 Hrs |
| WL-1051QC4 | White | 208-250VAC | 1.5mA | 25,000 Hrs |
| WL-1053QC5 | Green | 208-250VAC | 1.5mA | 25,000 Hrs |
| Incandescent 12V Series | | | | |
| WL-1090QC1-12V | Red | 12V-14V | 80mA | 25,000 Hrs |
| WL-1090QC3-12V | Amber | 12V-14V | 80mA | 25,000 Hrs |
| WL-1090QC4-12V | White | 12V-14V | 80mA | 25,000 Hrs |
| WL-1090QC5-12V | Green | 12V-14V | 80mA | 25,000 Hrs |
| Incandescent 28V Series | | | | |
| WL-1090QC1-28V | Red | 24V-28V | 40mA | 25,000 Hrs |
| WL-1090QC3-28V | Amber | 24V-28V | 40mA | 25,000 Hrs |
| WL-1090QC4-28V | White | 24V-28V | 40mA | 25,000 Hrs |
| WL-1090QC5-28V | Green | 24V-28V | 40mA | 25,000 Hrs |

Body Material: Nylon, white
 Lens Material: Polycarbonate
 Bezel Material: Stainless steel
 Note: .250 quick connects available upon request

Certifications: Most Wamco indicators carry Agency approvals. Please contact Wamco for the latest Agency information regarding the specific product series and voltage required.
 Options: Additional options and lens styles available. Please contact Wamco for more information.

| | | | | | |
|----------|----|----------|---|---|------------------|
| Drawn | SC | 03/01/10 | Panel Mount Indicators Neon and Incandescent | Datasheet: WL-105XQCX Series WL-1090QCX-XXX Series | Rev: 1 |
| Checked | EB | 03/01/10 | | | |
| Approved | EB | 03/02/10 | | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Other Tools](#) category:

Click to view products by [Wamco](#) manufacturer:

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [899-2-KT46](#) [899-5-KT46](#) [CR-0AFL4--332K](#) [CR-12FP4--260R](#) [CRCW04021100FRT7](#)
[CRCW04021961FRT7](#) [5800-0090](#) [CRCW04024021FRT7](#) [CRCW040254R9FRT7](#) [CRCW0603102JRT5](#) [59065-5](#) [00-8273-RDPP](#) [00-8729-](#)
[WHPP](#) [593033](#) [593058](#) [593072](#) [593564100](#) [593575](#) [593591](#) [593593](#) [011349-000](#) [LTLA506SBLAMNBL](#) [CRCW08052740FRT1](#) [LUC-](#)
[012S070DSM](#) [LUC-018S070DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [00-5080-YWPP](#) [5E4750/01-20R0-T/R](#) [LW1A-L1-GL](#) [LW1A-P1-GD](#)
[LW1L-A1C10V-GL](#) [LW1L-M1C70-A](#) [0202-0173](#) [00-9089-RDPP](#) [00-9300-RDPP](#) [CRCW2010331JR02](#) [01-1003W-8/32-10](#) [601-GP-08-](#)
[KT39](#) [601-JJ-06](#) [601-SPB](#) [601YSY](#) [602-JJ-03](#) [602SPB](#) [602Z](#) [603-JJ-07-FP](#) [603-JJY-04](#) [604J](#)