

Technical Data

Issue 2 / July 2006

AT526 35 Micron Copper Foil Shielding Tape

General description

35 micron copper foil coated with an electrically conductive acrylic adhesive supplied on a removable silicone liner.

- Conductive acrylic adhesive
- Good high and low temperature resistance
- Can be easily soldered
- Easy unwind


Specification

- Tested in accordance with ASTM D-1000 latest issue, BS EN 60454 - Part 2 test methods (Formerly VDE 0340, BS 3924.)
- Tested and meets military specification MIL – T - 47012
- Construction is tested in-house and conforms to the Flame retardant requirement part only of UL510

Technical Details

Technical details	BS value	ASTM value
Typical values		
Foil thickness:	0.035mm	1.4 mil
Adhesive thickness:	0.025mm	1.0 mil
Total thickness:	0.060mm	2.4 mil
Adhesion to steel:	4.5 N/cm	41 oz/inch
Tensile strength:	40 N/cm	23 lbs/inch
Temperature Resistance:	-20°C to +155°C	Up to +311°F
Recommended curing cycle:	1 hour at 150°C or 2 hours at 130°C	
Electrical resistance through		
Adhesive*:	0.003 ohms	
RoHS compliant	Yes	
Storage Temperature	+12°C to +25°C	

*Tested according to MIL STD 202F method 307 across surface area of 1 sq. inch.

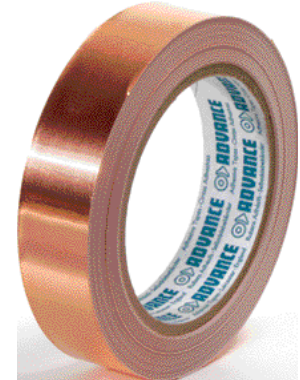

NOTE

Except where indicated otherwise, the figures stated are average values and should not be regarded as MAXIMUM or MINIMUM values for specification purposes. The Company reserves the right to improve products and any change in specification will result in a re-issue of the relevant 'Technical Data Sheet'. Customers should satisfy themselves that the tape is suitable for their requirements whether after such modifications or otherwise. Please check that you have the latest issue of the 'Technical Data Sheet'. All slitting and length tolerances are to British Standards. Before use the customer is advised to consult the Health & Safety Data Sheet produced by the company for this product, which is available on request.

STORAGE

Tapes stored below the minimum recommended temperature will require warming up to that level before use. Up to 24 hours may be required for this to take place.

 **ADVANCE**
adhesive tapes



INVESTOR IN PEOPLE

Advance Tapes International Limited, PO Box 122,
Abbey Meadows, Leicester, LE4 5RA.

Tel: 0116 251 0191. Fax: 0116 265 2046. www.advancetapes.com

AFERA

Association des Fabricants Européens de
Rubans Auto-Adhésifs.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [advance tapes manufacturer](#):

Other Similar products are found below :

[AT6000 ORANGE 33M X 50MM](#) [AT175 YELLOW 50M X 50MM](#) [AT4001 WHITE 55M X 25MM](#) [AT4002 WHITE 55M X 25MM](#) [AT160 BLUE 50M X 50MM](#) [AT8 BLACK 33M X 50MM](#) [AT202 WHITE 50M X 50MM](#) [AT159 BLACK 50M X 25MM](#) [AT159 GREEN 50M X 50MM](#) [AT175 SILVER 50M X 50MM](#) [AT6200 ORANGE 25M X 50MM](#) [AT2000 YELLOW 18M X 50MM](#) [AT2000 BLACK 18M X 100MM](#) [AT8 GREEN 33M X 50MM](#) [AT159 WHITE 50M X 50MM](#) [AT159 BLUE 50M X 50MM](#) [AT200 WHITE 50M X 50MM](#) [AT541 33M X 12MM](#) [AT506 50M X 50MM](#) [AT30 BLACK 33M X 50MM](#) [AT30 CLEAR 33M X 50MM](#) [AT159 GREY 50M X 25MM](#) [AT159 GREY 50M X 50MM](#) [AT8H GREEN / WHITE 33M X 50MM](#) [AT85 BLACK 10M X 50MM](#) [AT8H RED / WHITE 33M X 50MM](#) [AT8 RED 33M X 50MM](#) [AT79 BLACK 10M X 19MM](#) [AT45 BLUE 33M X 50MM](#) [AT544 33M X 25MM](#) [AT87 BLACK 10M X 19MM](#) [AT170 WHITE 50M X 50MM](#) [AT159 BLUE 50M X 25MM](#) [AT200 GREY 50M X 50MM](#) [AT160 RED 50M X 50MM](#) [AT7 GREY 33M X 19MM](#) [AT4002 WHITE 55M X 19MM](#) [AT202 BLACK 50M X 50MM](#) [AT132 WHITE 50M X 50MM](#) [AT202 SILVER 50M X 50MM](#) [AT525 COPPER 33M X 25MM](#) [AT27 TRANSPARENT 33M X 25MM](#) [AT6103 33M X 50MM](#) [AT521 SILVER 33M X 25MM](#) [AT132 50M X 50MM](#) [AT544 33M X 12MM](#) [AT180 BLACK 50M X 50MM](#) [AT77 33M X 19MM](#) [AT159 WHITE 50M X 25MM](#) [AT8 YELLOW 33M X 50MM](#)