




**Panel Mount Indicator, Non-Relampable
Neon Technology
Mounting Hole, Ø 0.500"**



All dimensions are in inches

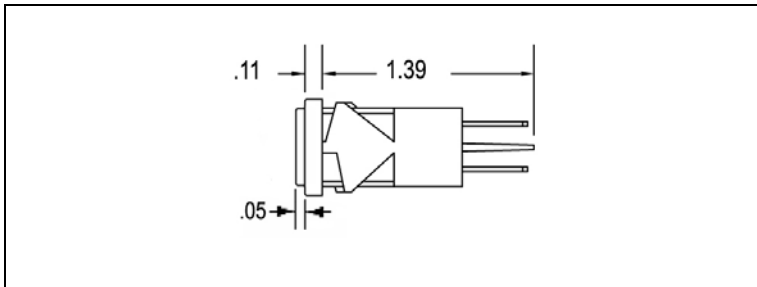

Recommended panel thickness: 0.030" to 0.090"

.187 terminals are standard

Storage temperature T_{STG} : -25°C - +80°C
 Ambient temperature T_A : -20°C - +60°C
 Voltage tolerance V_{OP} : ±10%

Part No.	Lens Color	Voltage	Current mA	Rated Life
Neon 115VAC Series				
WL-1060QD1	Red	105-125VAC	1.5mA	25,000 Hrs
WL-1060QD3	Amber	105-125VAC	1.5mA	25,000 Hrs
WL-1060QD4	White	105-125VAC	1.5mA	25,000 Hrs
WL-1060QD5	Green	105-125VAC	1.5mA	25,000 Hrs
Neon 230VAC Series				
WL-1061QD1	Red	208-250VAC	1.5mA	25,000 Hrs
WL-1061QD3	Amber	208-250VAC	1.5mA	25,000 Hrs
WL-1061QD4	White	208-250VAC	1.5mA	25,000 Hrs
WL-1061QD5	Green	208-250VAC	1.5mA	25,000 Hrs
Neon 480VAC Series				
WL-1062QD1	Red	432-528VAC	1.5mA	25,000 Hrs
WL-1062QD3	Amber	432-528VAC	1.5mA	25,000 Hrs
WL-1062QD4	White	432-528VAC	1.5mA	25,000 Hrs
WL-1062QD5	Green	432-528VAC	1.5mA	25,000 Hrs
Neon 600VAC Series				
WL-1063QD1	Red	540-660VAC	1.5mA	25,000 Hrs
WL-1063QD3	Amber	540-660VAC	1.5mA	25,000 Hrs
WL-1063QD4	White	540-660VAC	1.5mA	25,000 Hrs
WL-1063QD5	Green	540-660VAC	1.5mA	25,000 Hrs

Body Material: Polycarbonate, white
 Lens Material: Polycarbonate
 Bezel Material: Stainless steel
 Note: .250 quick connects available upon request

Certifications: Most Wamco indicators carry Agency approvals. Please contact Wamco for the latest Agency information regarding the specific product series and voltage required.
 Options: Additional options and lens styles available. Please contact Wamco for more information.

Drawn	SC	03/01/10	Panel Mount Indicators Neon	Datasheet: WL-106XQDX Series	Rev: 1
Checked	EB	03/01/10			
Approved	EB	03/02/10			

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [wamco manufacturer](#):

Other Similar products are found below :

[WL-2195A5-28V](#) [WL-19041351](#) [WL-B05I03L0300](#) [WL-1090D1-12V](#) [WL-1061QC1](#) [WL-192A1250](#) [WL-2153A5](#) [WL-19012353](#) [WL-19010351](#) [WL-19210250](#) [WL-19091352](#) [WL-19040352](#) [WL-19040252](#) [WL-1090QC4-28V](#) [WL-19050352](#) [WL-1090QC3-28V](#) [WL-B05G10F0900](#) [WL-6091QM5-24V](#) [WL-19040257](#) [WL-19210350](#) [WL-19080255](#) [WL-192A0351](#) [WL-1090A1-28V](#) [WL-192A1350](#) [WL-19210251](#) [WL-19040451](#) [WL-19040353](#) [WL-19011352](#) [WL-19081350](#) [WL-192A0350](#) [WL-19040357](#) [WL-19050257](#) [WL-1062C1](#) [WL-1090A5-12V](#) [WL-19090350](#) [WL-1860235W3D](#) [WL-1051QC1](#) [WL-1052QC5](#) [WL-6391Q2D5-24V](#) [WL-2151A1](#) [WL-19090252](#) [WL-1032D5](#) [WL-192A1251](#) [WL-2191U5-12V](#) [WL-2152A5](#) [WL-19090355](#) [WL-6391Q2M3-12V](#) [WL-1060QC5](#) [WL-2150A3](#) [WL-19210351](#)