

WIDEBAND LNA MODULE 2 - 20 GHz




Typical Applications

The HMC-C022 Wideband LNA is ideal for:

- Telecom Infrastructure
- Microwave Radio & VSAT
- Military & Space
- Test Instrumentation
- Fiber Optics

Functional Diagram

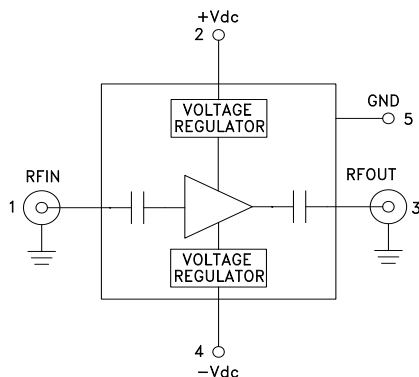

Features

- Noise Figure: 2 dB @ 8 GHz
- Flat Gain: 14 dB \pm 0.5 dB
- P1dB Output Power: +18 dBm @ 8 GHz
- Spurious-Free Operation
- Regulated Supply and Bias Sequencing
- Hermetically Sealed Module
- Field Replaceable SMA connectors
- 55 °C to +85 °C Operating Temperature

General Description

The HMC-C022 is a GaAs MMIC pHEMT Low Noise Distributed Amplifier in a miniature, hermetic module with replaceable SMA connectors which operates between 2 and 20 GHz. The amplifier provides 14 dB of gain, 2 to 3 dB noise figure and up to +18 dBm of output power at 1 dB gain compression. Gain flatness is excellent from 2 - 18 GHz making the HMC-C022 ideal for EW, ECM RADAR and test equipment applications. The wideband amplifier I/Os are internally matched to 50 Ohms and are internally DC blocked. Integrated voltage regulators allow for flexible biasing of both the negative and positive supply pins, while internal bias sequencing circuitry assures robust operation.

Electrical Specifications, $T_A = +25^\circ \text{C}$, +Vdc = +8V to +16V, -Vdc = -3V to -12V


| Parameter | Min. | Typ. | Max. | Min. | Typ. | Max. | Min. | Typ. | Max. | Units |
|--|-------|------------|-------|--------|-----------|-------|---------|-----------|-------|--------|
| Frequency Range | 2 - 6 | | | 6 - 12 | | | 12 - 20 | | | GHz |
| Gain | 12 | 15 | | 11 | 14 | | 10 | 13 | | dB |
| Gain Flatness | | ± 0.25 | | | ± 0.5 | | | ± 0.5 | | dB |
| Gain Variation Over Temperature | | 0.008 | 0.015 | | 0.008 | 0.015 | | 0.008 | 0.015 | dB/ °C |
| Noise Figure | | 2.5 | 4.5 | | 2.0 | 3.0 | | 3.0 | 5.0 | dB |
| Input Return Loss | | 17 | | | 17 | | | 18 | | dB |
| Output Return Loss | | 13 | | | 15 | | | 8 | | dB |
| Output Power for 1 dB Compression (P1dB) | 15 | 18 | | 13 | 16 | | 9 | 13 | | dBm |
| Saturated Output Power (P _{sat}) | | 22 | | | 21 | | | 19 | | dBm |
| Output Third Order Intercept (IP3) | | 28 | | | 27 | | | 23 | | dBm |
| Positive Supply Current (+IDC) | | 75 | | | 75 | | | 75 | | mA |
| Negative Supply Current (-IDC) | | 1.8 | | | 1.8 | | | 1.8 | | mA |

Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.


For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106
Phone: 781-329-4700 • Order online at www.analog.com
Application Support: Phone: 1-800-ANALOG-D

**WIDEBAND LNA MODULE
2 - 20 GHz**


Gain & Return Loss

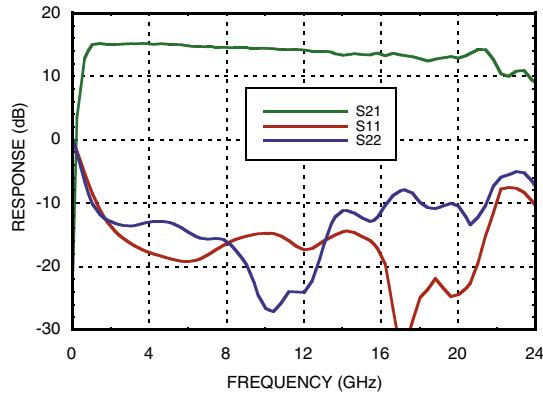


Gain vs. Temperature

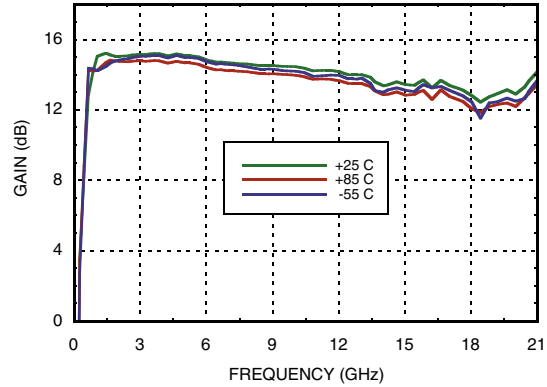


Input Return Loss vs. Temperature

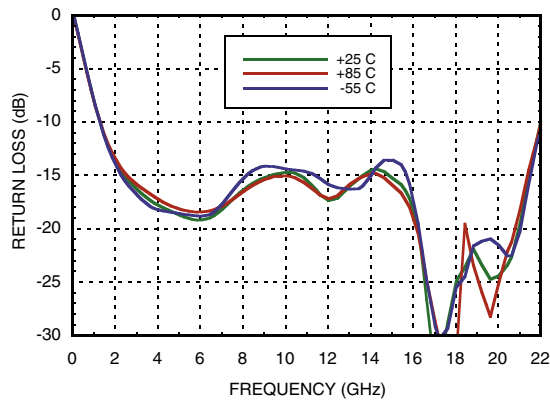


Output Return Loss vs. Temperature

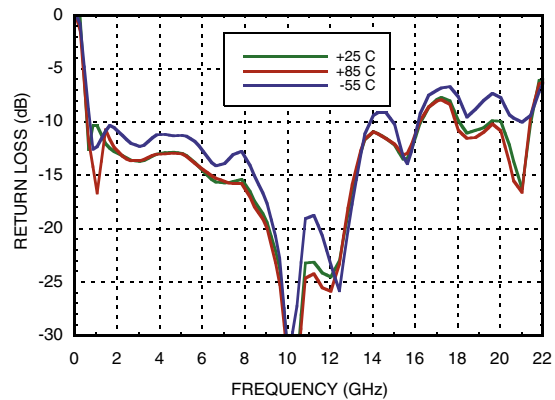

Reverse Isolation vs. Temperature

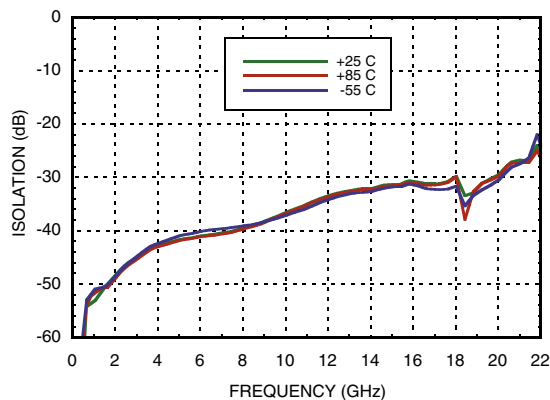

Noise Figure vs. Temperature

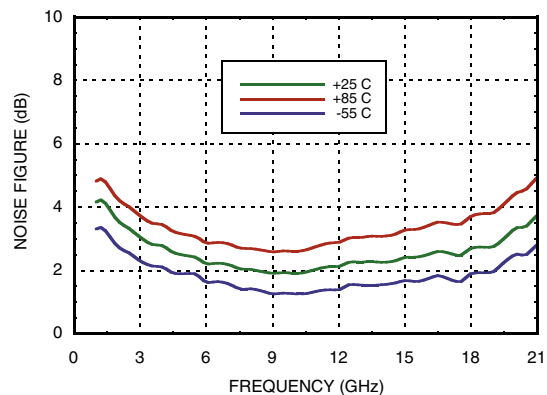


Information furnished by Analog Devices is believed to be accurate and reliable. However, no responsibility is assumed by Analog Devices for its use, nor for any infringements of patents or other rights of third parties that may result from its use. Specifications subject to change without notice. No license is granted by implication or otherwise under any patent or patent rights of Analog Devices. Trademarks and registered trademarks are the property of their respective owners.


For price, delivery, and to place orders: Analog Devices, Inc., One Technology Way, P.O. Box 9106, Norwood, MA 02062-9106 Phone: 781-329-4700 • Order online at www.analog.com Application Support: Phone: 1-800-ANALOG-D

WIDEBAND LNA MODULE 2 - 20 GHz


P1dB vs. Temperature

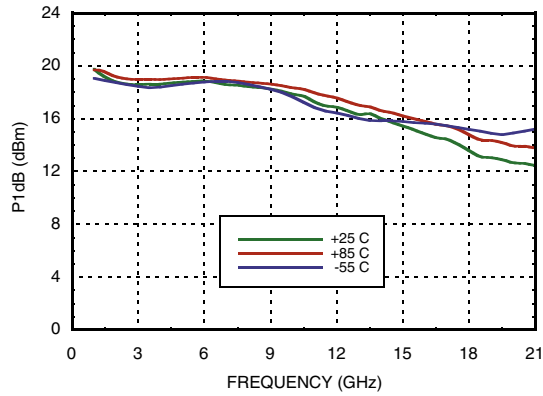

Psat vs. Temperature

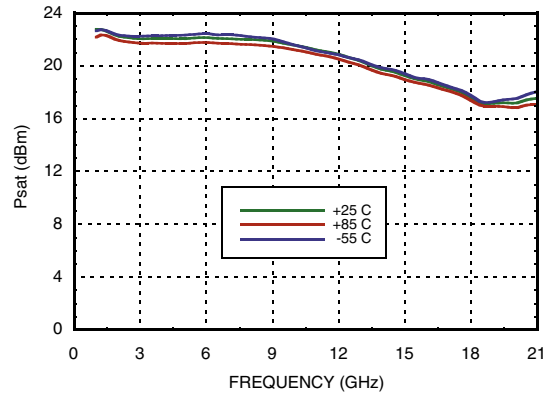

Output IP3 vs. Temperature

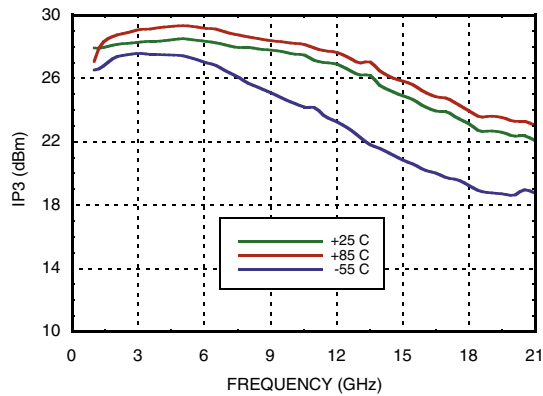

Absolute Maximum Ratings






| | |
|-------------------------------------|----------------|
| Positive Bias Supply Voltage (+Vdc) | +17V Max |
| Negative Bias Supply (-Vdc) | -16V Min. |
| RF Input Power (RFIN) | +18 dBm |
| Storage Temperature | -65 to +150 °C |
| Operating Temperature | -55 to +85 °C |



**ELECTROSTATIC SENSITIVE DEVICE
OBSERVE HANDLING PRECAUTIONS**


WIDEBAND LNA MODULE 2 - 20 GHz

Pin Descriptions

| Pin Number | Function | Description | Interface Schematic |
|------------|-------------------|---|---|
| 1 | RFIN & RF Ground | RF input connector, SMA female, field replaceable. This pin is AC coupled and matched to 50 Ohms. |  |
| 2 | +Vdc | Positive power supply voltage for the amplifier. |  |
| 3 | RFOUT & RF Ground | RF output connector, SMA female. This pin is AC coupled and matched to 50 Ohms. |  |
| 4 | -Vdc | Negative power supply voltage for the amplifier. |  |
| 5 | GND | Power supply ground. |  |

**WIDEBAND LNA MODULE
2 - 20 GHz**

Outline Drawing

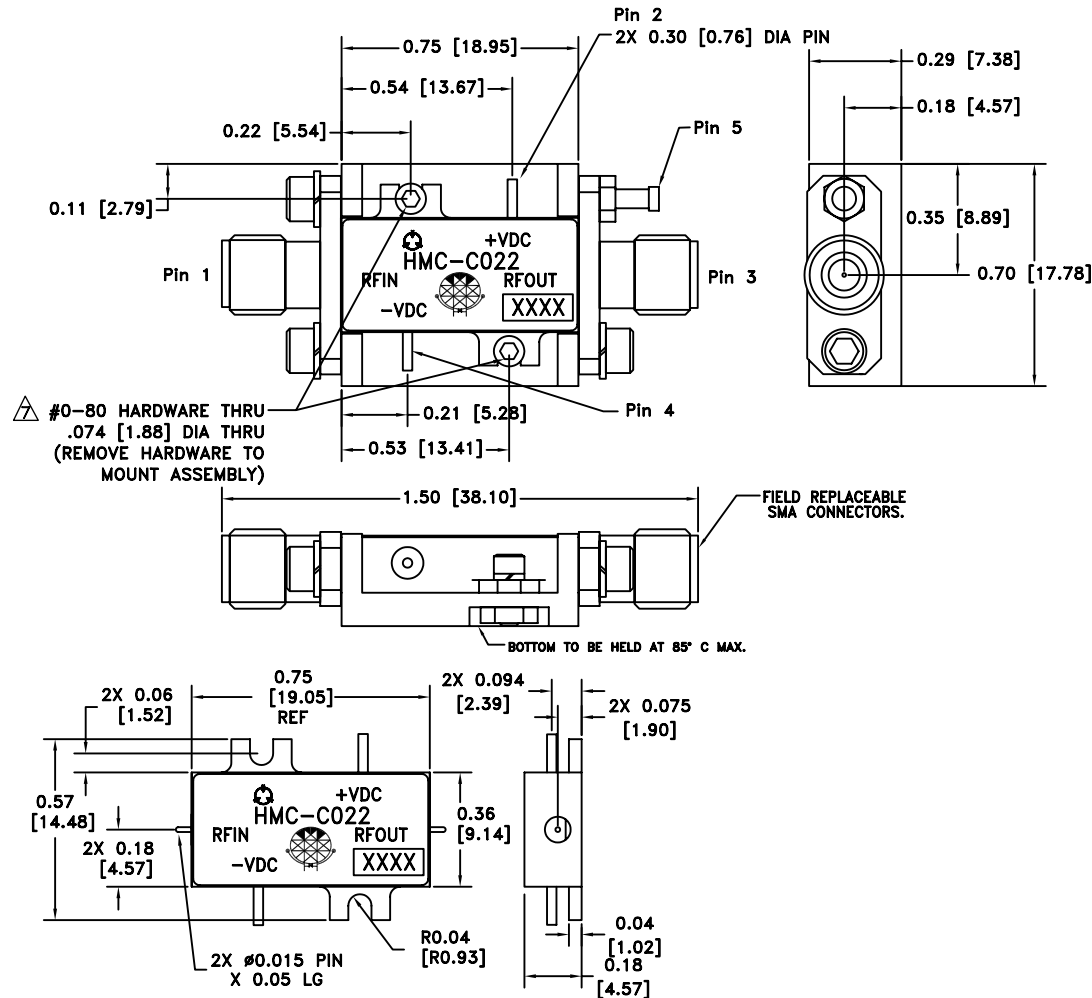

Package Information

| | |
|-------------------------------|-------------------------|
| Package Type | C-2B |
| Package Weight ^[1] | 11.2 gms ^[2] |
| Spacer Weight | N/A |

[1] Includes the connectors

[2] ±1 gms Tolerance

NOTES:

1. PACKAGE, LEADS, COVER MATERIAL: KOVAR™
2. SPACER MATERIAL: ALUMINUM
3. PLATING: ELECTROLYTIC GOLD 50 MICROINCHES MIN., OVER ELECTROLYTIC NICKEL 75 MICROINCHES MIN.
4. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
5. TOLERANCES ±.005 [0.13] UNLESS OTHERWISE SPECIFIED.
6. FIELD REPLACEABLE SMA CONNECTORS. TENSOLITE 5602 - 5CCSF OR EQUIVALENT.

△ TO MOUNT MODULE TO SYSTEM PLATFORM REPLACE 0 - 80 HARDWARE WITH DESIRED MOUNTING SCREWS.

**WIDEBAND LNA MODULE
2 - 20 GHz****Notes:**

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Sub-GHz Modules](#) category:

Click to view products by [Analog Devices](#) manufacturer:

Other Similar products are found below :

[HMC-C024](#) [nRF24L01P-MODULE-SMA](#) [CMD-KEY2-418-CRE](#) [V640-A90](#) [SM1231E868](#) [HMC-C582](#) [SM-MN-00-HF-RC](#) [HMC-C031](#)
[LoRa Node Kit\(US\)](#) [Sierra HL7588 4G KIT\(US\)](#) [WISE-4610-S672NA](#) [EC21AUFA-MINIPCIE](#) [EC21EUGA-MINIPCIE](#) [CS-EASYSWITCH-](#)
[25](#) [EC21JFB-MINIPCIE](#) [DL-RFM96-433M](#) [Ra-07H-V1.1](#) [Ra-07](#) [Ra-01SH](#) [Ra-01S-T](#) [Ra-01SH-T](#) [CMD-HHCP-418-MD](#) [CMD-HHCP-433-](#)
[MD](#) [CMD-HHLR-418-MD](#) [2095000000200](#) [XB9X-DMRS-031](#) [20911051101](#) [COM-13909](#) [HMC-C033](#) [COM-13910](#) [WRL-14498](#)
[SX1276RF1KAS](#) [HMC-C011](#) [HMC-C014](#) [HMC-C050](#) [HMC-C001](#) [HMC-C006](#) [HMC-C030](#) [HMC-C021](#) [HMC-C041](#) [HMC-C042](#) [HMC-](#)
[C048](#) [HMC-C051](#) [HMC-C071](#) [HMC-C072](#) [HMC-C088](#) [A2500R24C00GM](#) [702-W](#) [HUM-900-PRC](#) [ISP4520-EU-ST](#)