

Optolinx IMP-100A

Industrial 10/100BaseTX to 100BaseFX Industrial PoE Media Converter




Features

- ▶ Embedded 1 Port PoE Injector Function
- ▶ RJ-45 Port Support Auto MDI/MDI-X Function
- ▶ Store-and-Forward Switching Architecture
- ▶ Built-in Link Loss Forwarding (LLF) & Link-Fault-Pass-Through (LFP)
- ▶ Wide Operating Temperature Model Available (-40° C to 80° C)
- ▶ DC 48V Redundant Power
- ▶ Provides EFT Protection 3000 VDC For Power Line
- ▶ Supports 6000 VDC Ethernet ESD Protection
- ▶ DIN-Rail or Wall Mountable
- ▶ IP30 Protection
- ▶ 5-Year Warranty



▶ Specifications

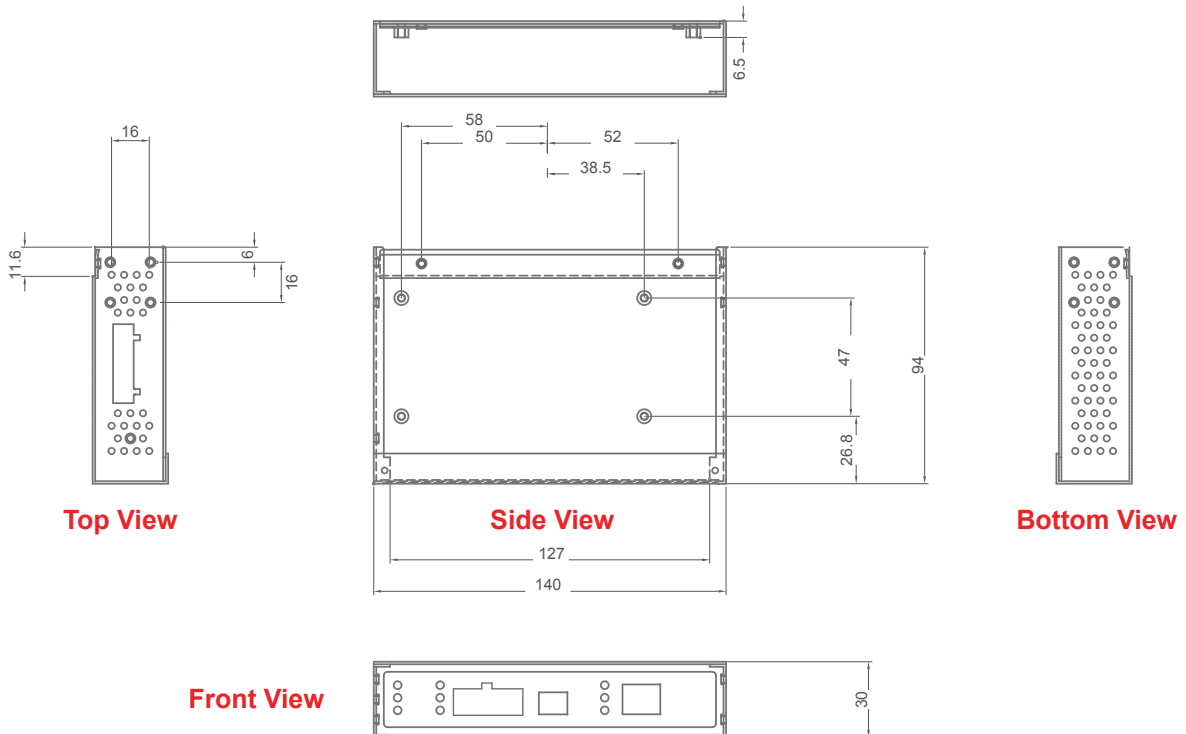

► Specifications

Standard

IEEE 802.3 10BaseT Ethernet
IEEE 802.3u 100BaseTX/100BaseFX
IEEE 802.3x Flow Control and Back-Pressure
IEEE 802.3af Power over Ethernet

Switch Architecture

Store and forward

Transfer Rate

14,880pps for Ethernet Port
148,800pps for Fast Ethernet Port

PoE Pin Assignment

RJ-45 Port Supports IEEE 802.3af End-Point, Alternative A Mode
Positive (VCC+): RJ-45 Pin 1, 2
Negative (VCC-): RJ-45 Pin 3, 6
Data (1, 2, 3, 6)

Connector

100M Fiber: 1 x SC (Multi-Mode) or SC (Single-Mode, 30Km)
10/100TX: 1 x RJ-45 w/ Auto MDI/MDI-X & Auto-Negotiation Function, Supports PoE Injector Function

Network Cable

10BaseT: 2-Pair UTP/STP Cat. 3, 4, 5 Cable
EIA/TIA-568 100-ohm (100m)
100BaseTX: 2-Pair UTP/STP Cat. 5 Cable
EIA/TIA-568 100-ohm (100m)

Fiber Parameters

Fiber Core: Multi-Mode (62.5/125um ~ 50/125um)
Single-Mode (9/125um ~ 10/125um)
Wavelength: 1310nm
Fiber Distance: Multi-Mode Fiber 2Km
Single-Mode Fiber 30Km

Link Loss Forward

TX → Fiber: If TX port link down, will force Fiber port to link down
Fiber → TX: If Fiber port link down, will force TX port to link down

DIP Switch

DIP 1: ON = Enables Port/Power Alarm
OFF = Disables Port/Power Alarm
DIP 2: ON = Enables Link Loss Forward & Link-Fault-Pass-Through
OFF = Disables Link Loss Forward & Link-Fault-Pass-Through
DIP 3: ON = 100BaseFX Half-Mode
OFF = 100BaseFX Full-Mode
DIP 4: ON = Media Mode (100TX to 100FX)
OFF = Switching Mode

LED

Unit: Power, Power 1, Power 2 (Green), Fault (Red)
TX: Link/Act (Green), 100M (Yellow), Feeding Power (Green)
Fiber: Link/Act (Green), Full Duplex/Collision (Yellow)

Power

DC 48V Redundant power

Power Consumption

3.3 Watts (without PoE), 16.4 Watts (Full Load with PoE)

Overload Current Protection

Present

Mechanical

Casing: IP30 Metal Case
Dimension (W x H x D): 30 x 140 x 95 mm (1.18 x 5.51 x 3.74 in.)
Installation: DIN-Rail/Wall Mountable

Operation Temperature

Standard: -10° C to 70° C (14° F to 158° F)
Wide Operating Temperature: -40° C to 80° C (-40° F to 176° F)

Operation Humidity

5% to 95% (Non-condensing)

Storage Temperature

-40° C to 85° C

EMI

FCC Class A
CE EN6100-4-2/EN6100-4-3/EN6100-4-4/EN6100-4-5/EN6100-4-6/
EN6100-4-8/EN6100-4-11/EN6100-6-2/EN6100-6-4

Safety

UL, cUL, CE EN60950-1

Stability Testing

Shock: IEC60068-2-27
Free Fall: IEC60068-2-32
Vibration: IEC60068-2-6

Warranty

5-Year Warranty

► Ordering Information

IMP-100A-M

Industrial PoE Media Converter, Multi-Mode Fiber, SC, 2 Km

IMP-100A-S3

Industrial PoE Media Converter, Single-Mode Fiber, SC, 30 Km

IMP-100A-M-T

Industrial PoE Media Converter, Multi-Mode Fiber, SC, 2 Km, Wide Operatng Temperature

IMP-100A-S3-T

Industrial PoE Media Converter, Single-Mode Fiber, SC, 30 Km, Wide Operating Temperature

Optional Accessories

CBF-SC01ST-MD

SC to ST Multi-Mode, Duplex Fiber Cable (1 Meter)

CBF-SC01SC-MD

SC to SC Multi-Mode, Duplex Fiber Cable (1 Meter)

CBF-SC01SC-SS

SC to SC Single-Mode, Simplex Fiber Cable (1 Meter)

AD-SCM-STF-M

SC (Male) to ST (Female) Duplex Adapter (Multi-Mode)

AD-SCM-STF-S

SC (Male) to ST (Female) Duplex Adapter (Single-Mode)

Antaira Technologies

Toll-Free: (877) 229-3665
Phone: (714) 671-9000
FAX: (714) 671-9944

e-Mail: info@antaira.com
Website: <http://www.antaira.com>


www.antaira.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Controllers](#) category:

Click to view products by [ANTAIRA](#) manufacturer:

Other Similar products are found below :

[CS1WCN223](#) [CS1WCN713](#) [CS1WKS001E](#) [61F-11NH](#) [61FGPN8DAC120](#) [61F-GP-NT AC110](#) [61F-GPN-V50-AC110](#) [70177-1011](#) [F03-03](#)
[HAS B](#) [F03-03 HAS C](#) [F03-31](#) [81513201](#) [81513535](#) [81550401](#) [FT1A-C12RA-W](#) [88981106](#) [H2CAC24A](#) [R88A-CAGA005S](#) [R88A-](#)
[CRGB003CR-E](#) [R88ARR080100S](#) [R88A-TK01K](#) [DCN1-1](#) [DTB4896VRE](#) [DTB9696CVE](#) [DTB9696LVE](#) [MR-50LF+](#) [E53-AZ01](#) [E53E8C](#)
[E5CWLQ1TCAC100240](#) [B300LKL21](#) [NE1ASCPU02EIPVER11](#) [NE1SCPU01](#) [NE1SDRM21U](#) [NSCXDC1V3](#) [NSH5-232CW-3M](#)
[NT20SST122BV1](#) [NV3Q-SW41](#) [NV4W-ATT01](#) [NV-CN001](#) [OAS-160-N](#) [K31S6](#) [K33-L1B](#) [K3TX-AD31A](#) [L595020](#) [SRS2-1](#) [G32X-V2K](#)
[26546803](#) [26546805](#) [26546831](#) [CJ1W-OD204](#)