



### Description

- Oven controlled crystal oscillator (OCXO) with voltage control
- Model IQOV-164-4
- Model Issue number 2

### Frequency Parameters

- Frequency 26.0MHz
- Frequency Tolerance @ 25°C ±50.00ppb
- Frequency Stability ±1.00ppb
- Operating Temperature Range -30.00 to 75.00°C
- Ageing ±0.5ppb max per day, ±50ppb max per year
- Supply Voltage Variation (measurement referenced to frequency observed with TA=25°C, Vs varied from 3.13V to 3.47V, VC=1.65V and load=50Ω): ±0.5ppb max
- Ageing: Vs, VC, TA constant measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V, load=50Ω and after 30 days of operation.
- Load Variation (5% load change measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V and load=50Ω): ±0.5ppb max
- Short Term Stability - Allan Variance (temperature stability, no EMI/EMC or other interference test after power for 1hr ref. to 25°C; 1s, using PN9000 equipment): 0.01ppb max / 1sec
- Frequency Tolerance (measurement referenced to frequency observed with TA=25°C, Vs=3.3V, VC=1.65V and after 15 minutes of operation, within 30 days after ex-works): ±50ppb
- Frequency Stability: TA varied across the operating temperature range, measurement referenced to frequency observed with  $f_{ref} = (f_{max} + f_{min}) / 2$ , Vs=3.3V, VC=1.65V, load=50Ω and temperature variable speed less than 2°C per minute.

### Electrical Parameters


- Supply Voltage 3.3V
- Supply Voltage Tolerance ±5%
- Current Consumption:  
Warm up: 1400mA max  
Steady state (@ 25°C): 500mA max

### Frequency Adjustment


- Pulling ±0.7ppm to ±1ppm
- Control Voltage Details 1.65V ±1.65V
- Linearity: ±10% max
- Slope: Positive
- Input Impedance: 100kΩ min

### Output Details


- Output Compatability Sine
- Output Load 50Ω
- Output Amplitude: 6dBm min, 10dBm max

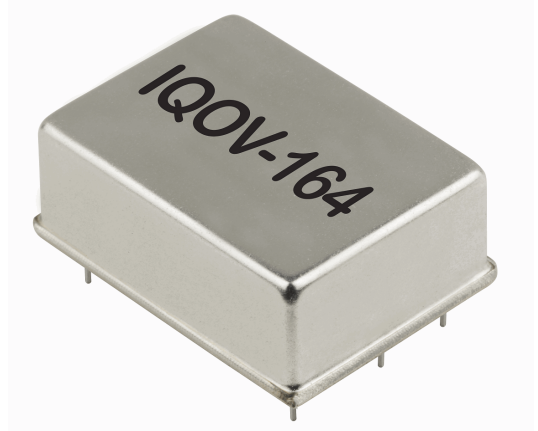

### Outline (mm)

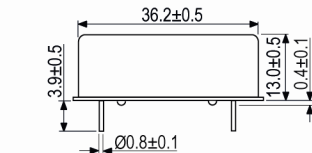

- Pin Connections
1. +Vs
  2. N/C
  3. Voltage Control
  4. GND
  5. Output



Underside View

### Sales Office Contact Details:

UK: +44 (0)1460 270200  
Germany: +49 (0)7264 9145-62

France: +33 (0)5 34 50 91 18  
USA: +1 408.273.4530

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)  
Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)



### Noise Parameters

- Phase Noise (@ 10MHz typ):
  - 125dBc/Hz @ 10Hz
  - 145dBc/Hz @ 100Hz
  - 150dBc/Hz @ 1kHz
  - 155dBc/Hz @ 10kHz
  - 155dBc/Hz @ 100kHz
  - 155dBc/Hz @ 1MHz
- Harmonic Suppression: -30dBc max
- Spurious Suppression: -60dBc max

### Environmental Parameters

- Shock: IEC 60068-2-27, Test Ea: 50G, 11ms duration, 1/2 sine wave, 3 times in each of 3 mutually perpendicular planes
- Vibration: IEC 60068-2-06, Test Fc: 10Hz-500Hz, 0.75mm displacement, 10G acceleration, one cycle per 30mins, 3 times in each of 3 mutually perpendicular planes, test 2hrs
- Storage Temperature Range: -55 to 105°C
- Operable Temperature Range: -40 to 85°C
- ESD Level:
  - HBM, Class 2: 2000V to 4000V, JEDEC JS-001-2010
  - Machine Model, Class B: 200V to 400V, JEDEC JS-001-2010

### Manufacturing Details

- Maximum Reflow Temperature: 260°C (30secs max)

### Compliance

- |              |           |
|--------------|-----------|
| RoHS Status  | Compliant |
| REACH Status | Compliant |

### Packaging

- |                 |                    |
|-----------------|--------------------|
| Pack Type: Bulk | Loose in bulk pack |
| Pack Size       | 1                  |
- Alternative packing option available

*This document is correct at the time of printing; please contact your local office for the latest version.*

### Sales Office Contact Details:

UK: +44 (0)1460 270200

Germany: +49 (0)7264 9145-62

France: +33 (0)5 34 50 91 18

USA: +1 408.273.4530

Email: [info@iqdfrequencyproducts.com](mailto:info@iqdfrequencyproducts.com)

Web: [www.iqdfrequencyproducts.com](http://www.iqdfrequencyproducts.com)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [iqd manufacturer](#):*

Other Similar products are found below :

[LFXTAL071761CUTT](#) [LFMCXO063767BULK](#) [LFMCXO063773BULK](#) [LFOCXO063802BULK](#) [LFOCXO063809BULK](#)  
[LFTCXO063709BULK](#) [LFTCXO063710BULK](#) [LFTCXO063779BULK](#) [LFTCXO070028Cutt](#) [LFTVXO063701BULK](#)  
[LFTVXO063702BULK](#) [LFTVXO063703BULK](#) [LFTVXO063707BULK](#) [LFTVXO063791BULK](#) [LFXTAL003156](#) [LFMCXO063766BULK](#)  
[LFMCXO063771BULK](#) [LFOCXO063816BULK](#) [LFTCXO063713BULK](#) [LFTCXO063714BULK](#) [LFTCXO063716BULK](#)  
[LFTVXO063704BULK](#) [LFTVXO063705BULK](#) [LFTVXO063706BULK](#) [LFTVXO063789BULK](#) [LFTVXO063790BULK](#) [LFXTAL003113](#)  
[LFOCXO063809](#) [LFSPXO009581](#) [LFTCXO063784](#) [LFTVXO063786](#) [LFSPXO009686Bulk](#) [LFRBXO059244Bulk](#) [LFTVXO075802Cutt](#)  
[LFOCXO067293Bulk](#) [LFTCXO075792Cutt](#) [LFMCXO064079BULK](#) [LFSPXO071189](#) [LFOCXO067293](#) [LFXTAL012312BULK](#)  
[LFTCXO063780BULK](#) [LFSPXO056269CUTT](#) [LFOCXO063803BULK](#) [LFSPXO009592CUTT](#) [LFOCXO065520Bulk](#) [LFMISC070550Bulk](#)  
[LFSPXO025494Cutt](#) [LFMCXO064080BULK](#) [LFOCXO063804BULK](#) [LFSPXO019884BULK](#)