


SERIES

5526R
5526



Air Core Inductors

DASH NUMBER*
INDUCTANCE (nH) ±5%
TURNS (Ref.)
TEST FREQUENCY (MHz)
Q MINIMUM
CURRENT RATING MAXIMUM (Amps)
SRF MINIMUM (MHz)

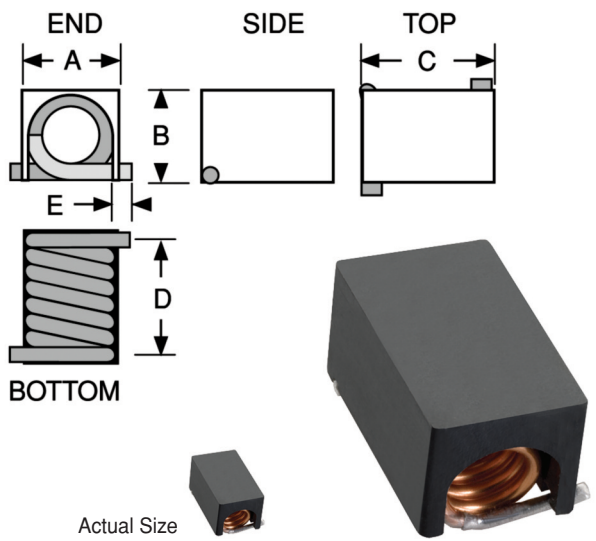

SERIES 5526						
-1	9	90	95	50	3.5	1140
-2	10	111	87	50	3.5	1020
-3	11	130	87	50	3.0	900
-4	12	169	95	50	3.0	875
-5	13	206	95	50	3.0	800
-6	14	222	92	50	3.0	730
-7	15	246	95	50	3.0	685
-8	16	307	95	50	3.0	660
-9	17	380	95	50	2.5	590
-10	18	420	95	50	2.5	540
-11	19	491	95	50	2.0	535
-12	20	538	87	50	2.0	490


*Complete part # must include series # PLUS the dash #

High Q, wire wound air cores

Designed to operate over a wide frequency range.

Physical Parameters

	Inches	Millimeters
A Max	0.250	6.35
B Max	0.235	5.97
C Max	0.420	10.67
D	0.314±.020	7.98±0.510
E	0.032 ± 0.025	0.813 ± 0.635
F	0.394	10.00
G	0.095	2.42
H	0.185	4.70
I	0.080	2.03
J	0.234	5.95

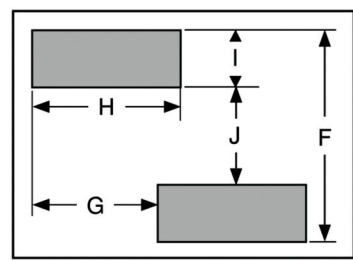

Operating Temperature Range -55°C to +125°C
Inductance and Q tested on HP4291A using HP16193A test fixture and correlation

Packaging Tape & reel (24mm): 13" reel, 800 pieces max.; 7" reel not available; Intermediate values available upon request.

Made in the U.S.A.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Fixed Inductors](#) category:

Click to view products by [API Delevan](#) manufacturer:

Other Similar products are found below :

[CR43NP-680KC](#) [CR54NP-820KC](#) [CR54NP-8R5MC](#) [CTX32CT-100](#) [70F224AI](#) [MGDQ4-00004-P](#) [MHL1ECTTP18NJ](#) [MHL1JCTTD12NJ](#)
[PE-51506NL](#) [PE-53601NL](#) [PE-53630NL](#) [PE-53824SNLT](#) [PE-62892NL](#) [PE-92100NL](#) [PG0434.801NLT](#) [PG0936.113NLT](#) [9310-16](#) [PM06-2N7](#) [PM06-39NJ](#) [A01TK](#) [1206CS-471XJ](#) [HC2-2R2TR](#) [HC2LP-R47-R](#) [HC3-2R2-R](#) [HCF1305-3R3-R](#) [1206CS-151XG](#) [RCH664NP-140L](#)
[RCH664NP-4R7M](#) [RCH8011NP-221L](#) [RCP1317NP-332L](#) [RCP1317NP-391L](#) [RCR1010NP-470M](#) [RCR110DNP-331L](#) [DH2280-4R7M](#)
[DS1608C-106](#) [ASPI-4020HI-R10M-T](#) [B10TJ](#) [B82477P4333M](#) [B82498B3101J000](#) [B82498B3680J000](#) [ELJ-RE27NJF2](#) [1812CS-153XJ](#)
[1812CS-183XJ](#) [1812CS-223XJ](#) [1812LS-104XJ](#) [1812LS-105XJ](#) [1812LS-124XJ](#) [1812LS-154XJ](#) [1812LS-223XJ](#) [1812LS-224XJ](#)