


Coaxial Phase Shifters for Optical Communications

DC to 40 GHz

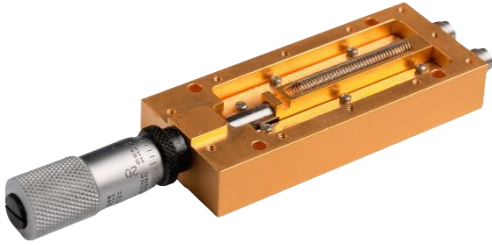

Features


- DC – 40 GHz Range for Optical Communications
- Precision 2.4 mm Connectors or 2.9 mm K® Connectors
- Precision Micrometer Head Adjustment for Enhanced Resolution and Setting Accuracy
- OPS Series

Technical Specifications

Model	OPS-0002	OPS-0002K®
Frequency Range (GHz)	DC-50	DC-40
Phase Shift, min (°/GHz)	40	40
Phase Shift, min (°/GHz/Shaft Turn)	1.6	1.6
Insertion Phase Nominal @ Min Phase Setting (°/GHz)	190	190
Number of Turns, min	28	28
Insertion Loss, max (dB) DC-20 GH 20-50 GH	3 5	3 5
Time Delay, min (ps)	100	100
Time Delay, min (ps/Shaft Turn)	4	4
Time Delay, nominal @ Min Phase Setting (ps)	500	500
Weight - Ounces	3	3

1. 1 Degree per GHz of Phase Shift equals 2.78 picoseconds of time delay.

Outline Drawing

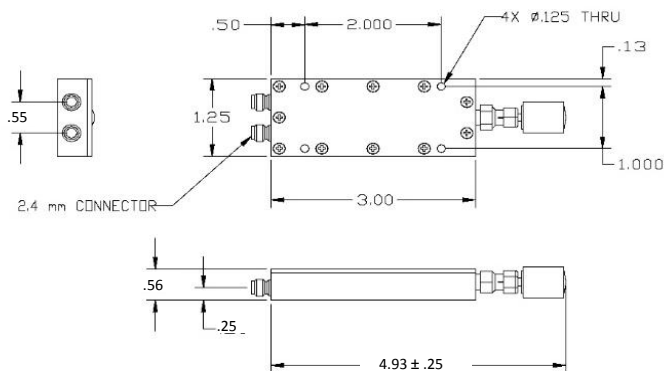

NOTES:

- API Technologies “Standard Warranty and Order Terms and Conditions” apply to all orders.
- All specifications subject to change without notice.
- Check “Ordering and Availability Listing” for delivery and ordering information.
- Contact our local Manufacturers Representative for pricing.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Phase Detectors/Shifters](#) category:

Click to view products by [Api Technologies](#) manufacturer:

Other Similar products are found below :

[TGP2105-SM](#) [TGP2100](#) [TGP2102](#) [MAPS-010163-TR1000](#) [HMC933LP4ETR](#) [HMC934LP5ETR](#) [HMC647LP6ETR](#) [MAPS-010166-001SMB](#)
[HMC247-SX](#) [HMC543ALC4B](#) [HMC642ALC5](#) [HMC647ALP6E](#) [HMC648ALP6E](#) [HMC936ALP6E](#) [HMC984LP4E](#) [MAPS-010146-TR0500](#)
[MAPS-010163-001SMB](#) [MAPS-010163-TR0500](#) [MAPS-010164-TR0500](#) [MAPS-010166-TR0500](#) [HMC642ALC5TR](#) [HMC649ALP6E](#)
[HMC984LP4ETR](#) [MAPS-010143-TR0500](#) [MAPS-010165-TR0500](#) [HMC649ALP6ETR](#) [MC100EP140DG](#) [MC100LVEL40DWG](#)
[MCK12140DG](#) [PE44820B-X](#) [CHP3015-QDG](#) [CMD176P4](#) [QPC2108](#) [HMC644ALC5](#) [MAPS-010145-TR0500](#) [MAPS-010144-TR0500](#)
[TGP2108-SM](#) [MAPS-010143-001SMB](#) [MAPS-010144-001SMB](#) [MAPS-010145-001SMB](#) [MAPS-010146-001SMB](#) [MAPS-010164-001SMB](#)
[HMC644ALC5TR](#) [MC100LVEL40DWR2G](#) [TGP2107-SM](#) [TGP2107](#) [TGP2109](#) [TGP2109-SM](#)