

### Description

The APJ14N65D is **CoolFET II** MOSFET family that is utilizing charge balance technology for extremely low on-resistance and low gate charge performance. APJ14N65F/P/T is suitable for applications which require superior power density and outstanding efficiency.

### General Features



$V_{DS} = 650V$  (Type: 730V)  $IDM = 14A$

$R_{DS(ON)} < 650m\Omega$  @  $V_{GS}=10V$  (**Type: 560m\Omega**)

### Application

Uninterruptible Power Supply(UPS)

Power Factor Correction (PFC)

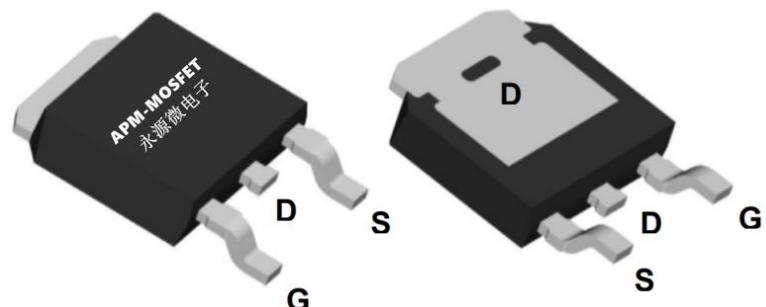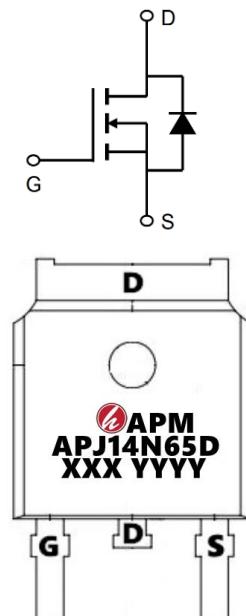

### Package Marking and Ordering Information

Product ID	Pack	Marking	Qty(PCS)
APJ14N65D	TO-252-3L	APJ14N65D XXX YYYY	1000

### Absolute Maximum Ratings ( $T_c=25^\circ C$ unless otherwise noted)

Symbol	Parameter	Value	Unit
$VDSS$	Drain-Source Voltage ( $V_{GS} = 0V$ )	650	V
$ID$	Continuous Drain Current	8	A
$IDM$	Pulsed Drain Current (note1)	14	A
$VGS$	Gate-Source Voltage	$\pm 30$	V
$E_{AS}$	Single Pulse Avalanche Energy (note2)	125	mJ
$P_D$	Power Dissipation ( $T_c = 25^\circ C$ )	25.5	W
$T_J, T_{stg}$	Operating Junction and Storage Temperature Range	-55~+150	°C
$R_{thJC}$	Thermal Resistance, Junction-to-Case	4.9	°C/W
$R_{thJA}$	Thermal Resistance, Junction-to-Ambient	49	°C/W

### Electrical Characteristics ( $T_J=25^\circ\text{C}$ , unless otherwise noted)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
BVDSS	Drain to source breakdown voltage	$V_{GS}=0\text{V}$ , $I_D=250\mu\text{A}$	650	700	--	V
$\Delta V_{DSS} / \Delta T_J$	Breakdown voltage temperature coefficient	$I_D=250\mu\text{A}$ , referenced to $25^\circ\text{C}$	--	0.7	--	$\text{V}/^\circ\text{C}$
IDSS	Drain to source leakage current	$V_{DS}=650\text{V}$ , $V_{GS}=0\text{V}$	--	--	1	$\mu\text{A}$
		$V_{DS}=520\text{V}$ , $T_C=125^\circ\text{C}$	--	--	50	$\mu\text{A}$
IGSS	Gate to source leakage current, forward	$V_{GS}=30\text{V}$ , $V_{DS}=0\text{V}$	--	--	100	$\text{nA}$
	Gate to source leakage current, reverse	$V_{GS}=-30\text{V}$ , $V_{DS}=0\text{V}$	--	--	-100	$\text{nA}$
VGS(TH)	Gate threshold voltage	$V_{DS}=V_{GS}$ , $I_D=250\mu\text{A}$	2.5	3.3	4.5	V
RDS(ON)	Drain to source on state resistance	$V_{GS}=10\text{V}$ , $I_D = 3.2\text{A}$	--	560	650	$\text{m}\Omega$
Ciss	Input capacitance	$V_{GS}=0\text{V}$ , $V_{DS}=100\text{V}$ , $f=1\text{MHz}$	--	438	--	pF
Coss	Output capacitance		--	19.5	--	
Crss	Reverse transfer capacitance		--	1.32	--	
td(on)	Turn on delay time	$V_{DS}=400\text{V}$ , $I_D=3.2\text{A}$ , $R_G=4.7\Omega$ , $V_{GS}=10\text{V}$	--	84.8	--	ns
tr	Rising time		--	25.2	--	
td(off)	Turn off delay time		--	227.6	--	
tf	Fall time		--	26.8	--	
Qg	Total gate charge	$V_{DS}=480\text{V}$ , $V_{GS}=10\text{V}$ , $I_D=3.2\text{A}$	--	11	--	nC
Qgs	Gate-source charge		--	2.1	--	
Qgd	Gate-drain charge		--	5.6	--	
IS	Continuous source current	Integral reverse p-n Junction diode in the MOSFET	--	--	11	A
ISM	Pulsed source current		--	--	44	A
VSD	Diode forward voltage drop.	$I_S=3.2\text{A}$ , $V_{GS}=0\text{V}$	--	0.7	1.5	V
Tr	Reverse recovery time	$I_S=3.2\text{A}$ , $V_{GS}=0\text{V}$ , $V_{DD}=400\text{V}$ , $dI_F/dt=100\text{A/us}$ ,	--	313	--	ns
Qrr	Reverse recovery Charge		--	0.877	--	uC

**Note :**

- 1、The data tested by surface mounted on a 1 inch<sup>2</sup> FR-4 board with 2OZ copper.
- 2、The EAS data shows Max. rating . L=0.5mH, IAS =3.2A, VDD =50V, RG=25Ω
- 3、The test condition is Pulse Test: ISD ≤ ID, di/dt = 100A/us, VDD≤ BVDSS, Starting at  $T_J =25^\circ\text{C}$
- 4、The power dissipation is limited by  $150^\circ\text{C}$  junction temperature
- 5、The data is theoretically the same as ID and IDM , in real applications , should be limited by total power dissipation.

### Typical Characteristics

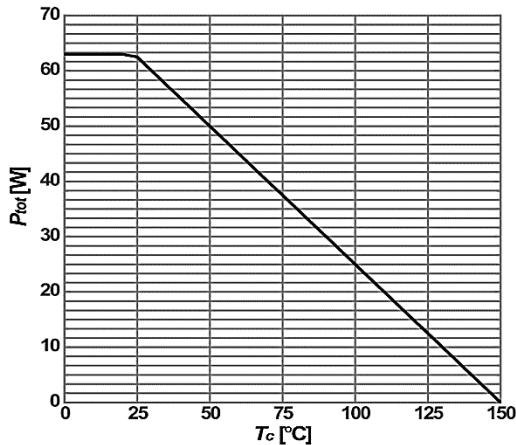


Figure1: Power dissipation (Non FullPAK)

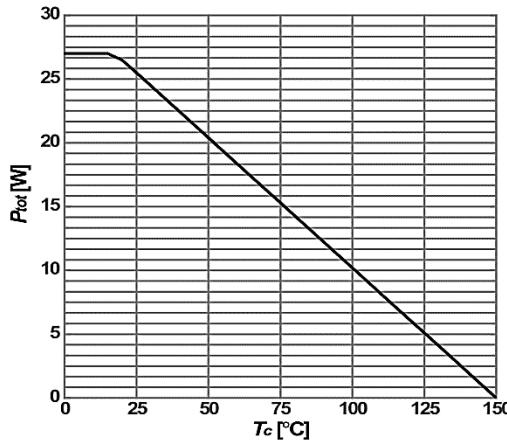


Figure2: Power dissipation (FullPAK)

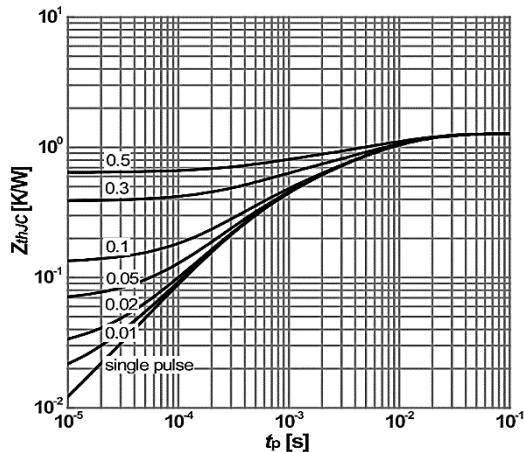


Figure3:Max. transient thermal impedance  
 $Z_{thJC}=f(t_p)$ ; parameter:  $D=t_p/T$

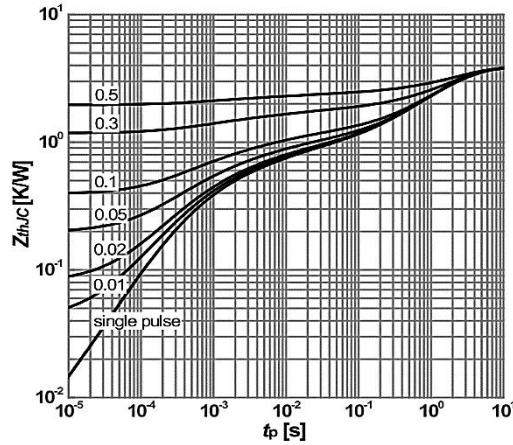


Figure4:Max. transient thermal impedance  
 $Z_{thJC}=f(t_p)$ ; parameter:  $D=t_p/T$

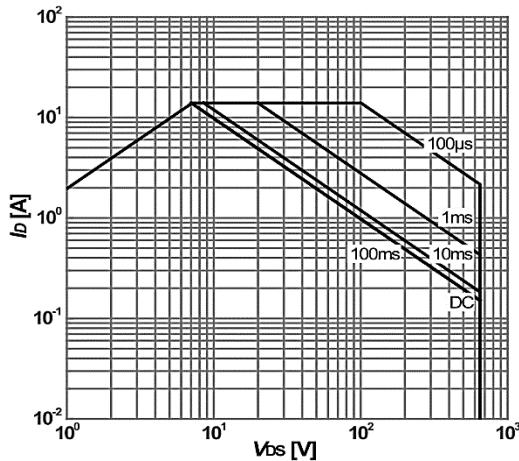


Figure5: Safe operating area (Non FullPAK)  
 $I_d=f(V_{ds})$ ;  $T_j=25^\circ C$ ;  $D=0$ ; parameter:  $t_p$

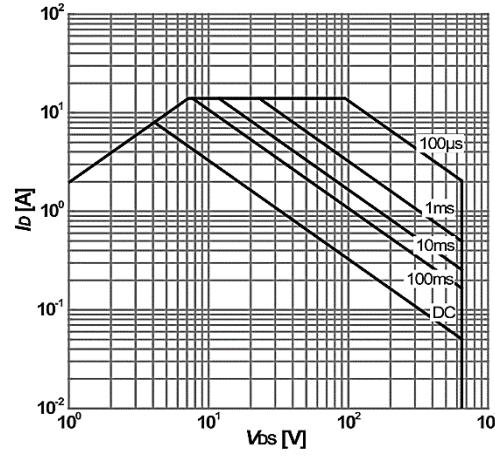


Figure6: Safe operating area (FullPAK)  
 $I_d=f(V_{ds})$ ;  $T_j=25^\circ C$ ;  $D=0$ ; parameter:  $t_p$



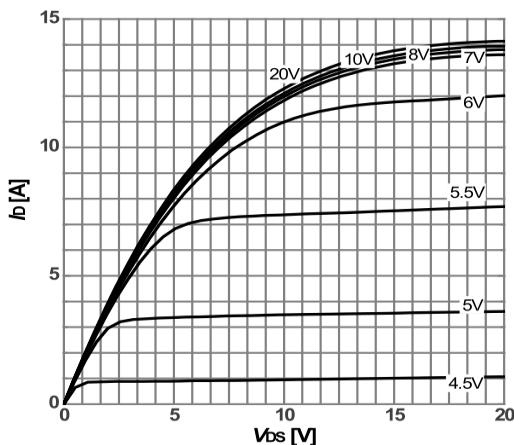


Figure 7: Typ. output characteristics  
 $I_D=f(V_{DS})$ ;  $T_j=25^\circ\text{C}$ ; parameter:  $V_{GS}$

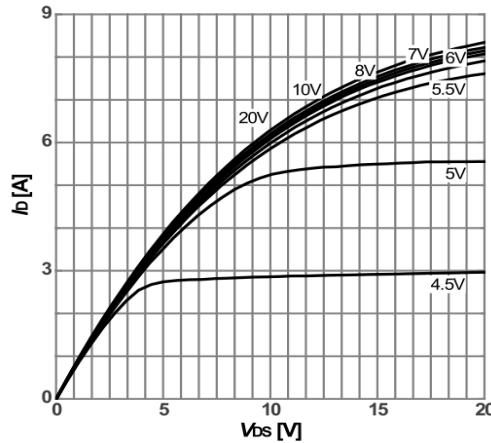


Figure 8 : Typ. output characteristics  
 $I_D=f(V_{DS})$ ;  $T_j=125^\circ\text{C}$ ; parameter:  $V_{GS}$

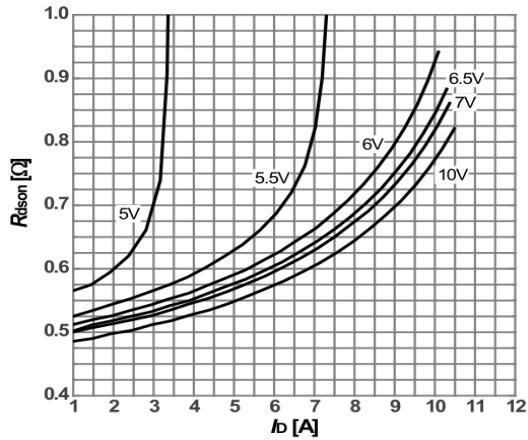


Figure9 : Typ. drain-source on-state resistance  
 $R_{DS(\text{on})}=f(I_D)$ ;  $T_j=25^\circ\text{C}$ ; parameter:  $V_{GS}$

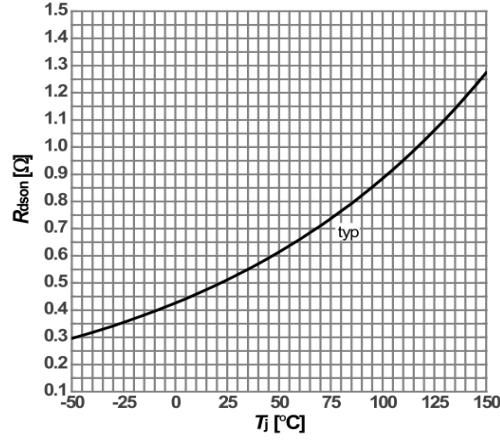


Figure 10: drain -source on-state resistance  
 $R_{DS(\text{on})}=f(T_j)$ ;  $I_D=3.2\text{A}$ ;  $V_{GS}=10\text{V}$

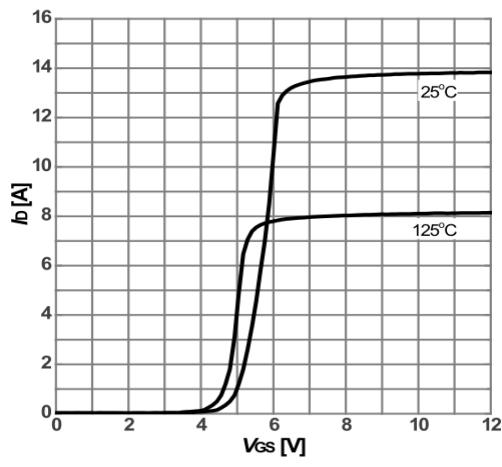


Figure 11: Type. transfer characteristics  
 $I_D=f(V_{GS})$ ;  $V_{DS}=20\text{V}$ ; parameter:  $T_j$

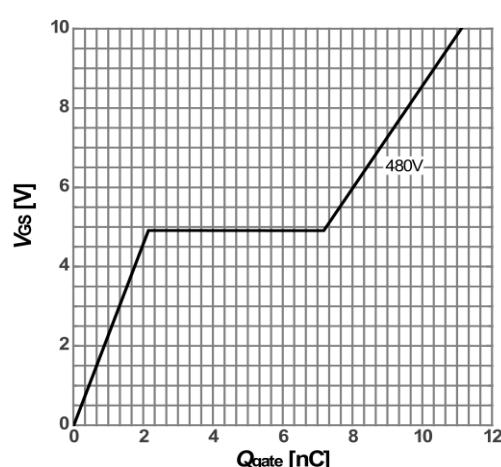


Figure 12: Type. gate charge  
 $V_{GS}=f(Q_{\text{gate}})$ ;  $I_D=3.2\text{A}$  pulsed;  $V_{DS}=480\text{V}$




APM

A Power Microelectronics

# APJ14N65D (AP65R650)

**650V N-Channel Enhancement Mode MOSFET**


## Package Mechanical Data: TO-252-3L

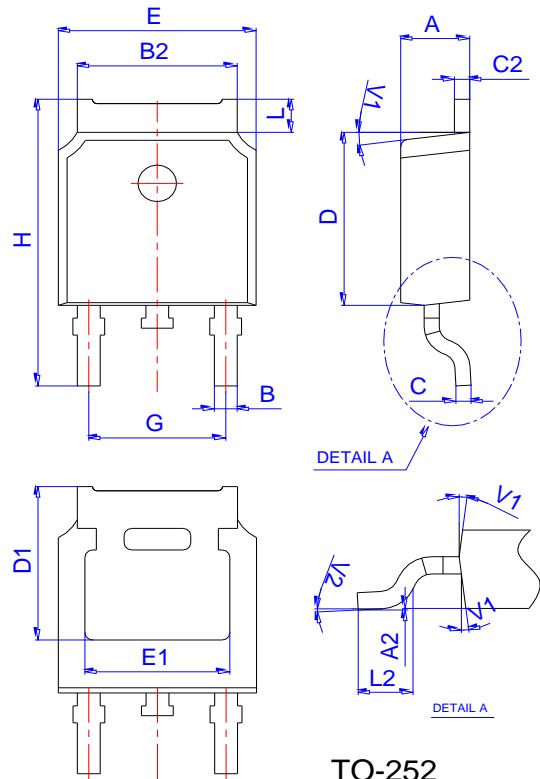

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
A	2.10		2.50	0.083		0.098
A2	0		0.10	0		0.004
B	0.66		0.86	0.026		0.034
B2	5.18		5.48	0.202		0.216
C	0.40		0.60	0.016		0.024
C2	0.44		0.58	0.017		0.023
D	5.90		6.30	0.232		0.248
D1	5.30REF			0.209REF		
E	6.40		6.80	0.252		0.268
E1	4.63			0.182		
G	4.47		4.67	0.176		0.184
H	9.50		10.70	0.374		0.421
L	1.09		1.21	0.043		0.048
L2	1.35		1.65	0.053		0.065
V1		7°			7°	
V2	0°		6°	0°		6°

TO-252

## Reel Specification-TO-252

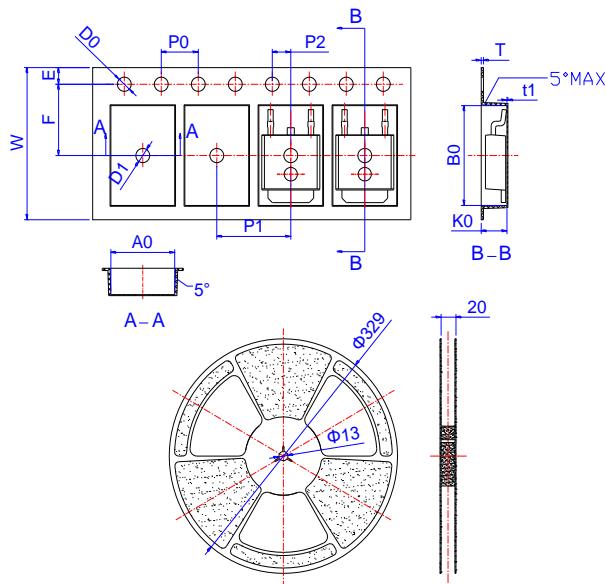

Ref.	Dimensions					
	Millimeters			Inches		
	Min.	Typ.	Max.	Min.	Typ.	Max.
W	15.90	16.00	16.10	0.626	0.630	0.634
E	1.65	1.75	1.85	0.065	0.069	0.073
F	7.40	7.50	7.60	0.291	0.295	0.299
D0	1.40	1.50	1.60	0.055	0.059	0.063
D1	1.40	1.50	1.60	0.055	0.059	0.063
P0	3.90	4.00	4.10	0.154	0.157	0.161
P1	7.90	8.00	8.10	0.311	0.315	0.319
P2	1.90	2.00	2.10	0.075	0.079	0.083
A0	6.85	6.90	7.00	0.270	0.271	0.276
B0	10.45	10.50	10.60	0.411	0.413	0.417
K0	2.68	2.78	2.88	0.105	0.109	0.113
T	0.24		0.27	0.009		0.011
t1	0.10			0.004		
10P0	39.80	40.00	40.20	1.567	1.575	1.583



# **APJ14N65D (AP65R650)**

## **650V N-Channel Enhancement Mode MOSFET**

### **Attention**

- 1, Any and all APM Microelectronics products described or contained herein do not have specifications that can handle applications that require extremely high levels of reliability, such as life support systems, aircraft's control systems, or other applications whose failure can be reasonably expected to result in serious physical and/or material damage. Consult with your APM Microelectronics representative nearest you before using any APM Microelectronics products described or contained herein in such applications.
- 2, APM Microelectronics assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all APM Microelectronics products described or contained herein.
- 3, Specifications of any and all APM Microelectronics products described or contained hereinstipulate the performance, characteristics, and functions of the described products in the independent state, and are not guarantees of the performance, characteristics, and functions of the described products as mounted in the customer's products or equipment. To verify symptoms andstates that cannot be evaluated in an independent device, the customer should always evaluate and test devices mounted in the customer's products or equipment.
- 4, APM Microelectronics Semiconductor CO., LTD. strives to supply high quality high reliabilityproducts. However, any and all semiconductor products fail with some probability. It is possible that these probabilistic failures could give rise to accidents or events that could endanger human lives that could give rise to smoke or fire, or that could cause damage to other property. Whendesigning equipment, adopt safety measures so that these kinds of accidents or events cannot occur. Such measures include but are not limited to protective circuits and error prevention circuits for safe design, redundant design, and structural design.
- 5, In the event that any or all APM Microelectronics products(including technical data, services) described or contained herein are controlled under any of applicable local export control laws and regulations, such products must not be exported without obtaining the export license from the authorities concerned in accordance with the above law.
- 6, No part of this publication may be reproduced or transmitted in any form or by any means,electronic or mechanical, including photocopying and recording, or any information storage or retrieval system, or otherwise, without the prior written permission of APM Microelectronics Semiconductor CO., LTD.
- 7, Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. APM Microelectronics believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.
- 8, Any and all information described or contained herein are subject to change without notice due to product/technology improvement,etc. When designing equipment, refer to the "DeliverySpecification" for the APM Microelectronics product that you Intend to use.

Edition	Date	Change
Rve1.0	2018/1/31	Initial release

**Copyright Attribution“APM-Microelectronic”**



# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

***Click to view similar products for MOSFET category:***

***Click to view products by APM Microelectronics manufacturer:***

Other Similar products are found below :

[IRFD120](#) [JANTX2N5237](#) [BUK455-60A/B](#) [MIC4420CM-TR](#) [VN1206L](#) [NDP4060](#) [SI4482DY](#) [IPS70R2K0CEAKMA1](#) [SQD23N06-31L-GE3](#)  
[TK16J60W,S1VQ\(O](#) [2SK2614\(TE16L1,Q\)](#) [DMN1017UCP3-7](#) [DMN1053UCP4-7](#) [SQJ469EP-T1-GE3](#) [NTE2384](#) [DMC2700UDMQ-7](#)  
[DMN2080UCB4-7](#) [DMN61D9UWQ-13](#) [US6M2GTR](#) [DMN31D5UDJ-7](#) [DMP22D4UFO-7B](#) [DMN1006UCA6-7](#) [DMN16M9UCA6-7](#)  
[STF5N65M6](#) [IRF40H233XTMA1](#) [STU5N65M6](#) [DMN6022SSD-13](#) [DMN13M9UCA6-7](#) [DMTH10H4M6SPS-13](#) [DMN2990UFB-7B](#)  
[IPB80P04P405ATMA2](#) [2N7002W-G](#) [MCAC30N06Y-TP](#) [MCQ7328-TP](#) [BXP7N65D](#) [BXP4N65F](#) [AOL1454G](#) [WMJ80N60C4](#) [BXP2N20L](#)  
[BXP2N65D](#) [BXT1150N10J](#) [BXT1700P06M](#) [TSM60NB380CP ROG](#) [RQ7L055BGTCR](#) [DMNH15H110SK3-13](#) [SLF10N65ABV2](#)  
[BSO203SP](#) [BSO211P](#) [IPA60R230P6](#) [IPA60R460CE](#)