


NOTES, UNLESS OTHERWISE SPECIFIED:

- 1 USE HEAT SHRINK 8 OVER DRAIN WIRE.
- 2 USE HEAT SHRINK 9 AT CABLE CLAMP ENTRY.
- 3 REFER TO B.O.M. FOR MATERIALS.
- 4 DRAIN WIRE TO BE SOLDERED TO "D" TYPE HOUSING.
- 5 VENDOR TO INSPECT WIRE TERMINATION.
(POSITION TO COLOR, POST ASS'Y).
- 6 REFER TO SEPARATE PARTS LIST. CABLE MANUFACTURER AND CONNECTOR SHELL VARIES ACCORDING TO CABLE ON HAND.
- 7 REFER TO EXTENSION CABLE LENGTH CHART WHEN MARKING THE CABLE.
MARK PART NO. AND CABLE ID ACCORDING TO FINISHED CABLE LENGTH.

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE 4332		
B	SEE ECO 5106	2-6-04	R.Hazelwood
C	SEE ECO 5112	2-17-04	R.Hazelwood
D	SEE ECO 511x	2-26-04	R.Hazelwood
E	ECO 5147. ADD NOTE 5.	8-4-08	R.BARRICK
F	ECO 5268 MARKING CHG	2-13-06	R.Hazelwood
G	ECO 5268 CBL MTL	2-13-06	R.Hazelwood
H	ECO 5765 TAB/CABLE MTL	5-15-08	J Kordik

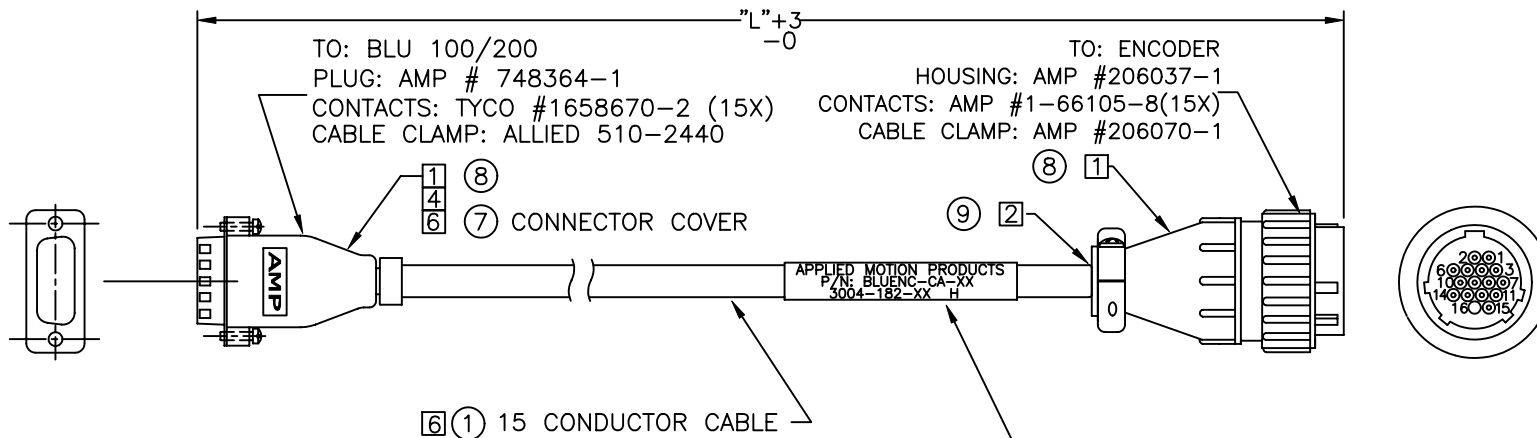

EXTENSION CABLE LENGTH CHART

DIM "L"	PART NO.	CABLE ID
4 FEET	3004-182-04 H	BLUENC-CA-04
10 FEET	3004-182-10 H	BLUENC-CA-10
20 FEET	3004-182-20 H	BLUENC-CA-20

PIN# TO Encoder	PIN# TO BLU100/200	SIGNAL	WIRE COLOR
1	1	A+	BLUE
2	2	A-	BLUE/BLACK
3	3	B+	GREEN
4	4	B-	GREEN/BLACK
5	5	Z+	YELLOW
6	6	Z-	YELLOW/BLACK
7	9	Hall 1+(U+)	BROWN
8	10	Hall 1-(U-)	BROWN/BLACK
9	11	Hall 2+(V+)	GREY
10	12	Hall 2-(V-)	GREY/BLACK
11	13	Hall 3+(W+)	WHITE
12	14	Hall 3-(W-)	WHITE/BLACK
13	7	+5V	RED
14	8	0V	BLACK
15	Note #4	SHIELD	DRAIN w/SHRINK TUBE

BLuENC-CA

TOLERANCES	THIRD ANGLE PROJECTION	
DECIMALS: MM (INCH)		
X.XXX = ±0.01 (.005)		
X.XX = ±0.10 (.010)		
X.X = ±0.20 (.020)	APPROVALS	DATE
ANGLES:	DRAWN <i>R.BARRICK</i>	8/14/02
MACH. = ±.5°	CHECKED <i>R.Hazelwood</i>	
CHAM. = ±5°	APPROVED	
COMPUTER DATA BASE DRAWING	R.H.	

 APPLIED MOTION PRODUCTS, INC.		
ALPHA MOTOR ENCODER CABLE EXTENSION		
B	DWG NO. 3004-182	REV H
SCALE: FULL		SHEET 1 OF 1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [DC Power Cords](#) category:

Click to view products by [Applied Motion](#) manufacturer:

Other Similar products are found below :

[172-4000](#) [172-4101](#) [172-7443-E](#) [21033836407](#) [2J-1865A](#) [2R7006A20A120](#) [426055400-3](#) [MN47A4BC01M010](#) [H-OU-2](#) [CA0002](#)
[420680840-3](#) [426451500-3](#) [P162PT4-36](#) [1-832692-4](#) [FJ-VSP 3M](#) [96CB-POWER-B-1.8M2](#) [426040200](#) [CA0006](#) [H-OU-27](#) [1700019464](#) [FJ-](#)
[VSP 10M](#) [MN47B4BC01M040](#) [H-OU-20](#) [2-836917-8](#) [867566-1](#) [804001P03M050G](#) [2050KH1-BK](#) [426013710-3](#) [58257-1069](#) [216603-0037](#)
[1011147](#) [1011324](#) [1012028](#) [862545-5](#) [BXC-10567](#) [172-2555](#) [32102-022800-200-RS](#) [P29000-M2](#) [P29004-M2](#) [DC.CAB.0201.0150](#)
[DC.CAB.0301.0150](#) [DC.CAB.0610.0150](#) [DC.CAB.0700.0150](#) [DC.CAB.1000.0300](#) [DC.CAB.1100.0150](#) [DC.CAB.1400.0150](#)
[DC.CAB.1410.0150](#) [DC.CAB.1500.0150](#) [DC.CAB.1811.0150](#) [DC.CAB.1900.0150](#)