

1550 Standard & 1350 Hi Inrush Switches 150A to IEC65 and 16A 250Vac



"Arcshield" feature hides visible switching arc



1550 Series 16(4)A 250Vac T125



UL CSA 16A 250Vac, (2 posn) 250Vac 1hp, 125Vac 1/2hp, (3 posn) 250 Vac 1/2hp, 125Vac 1/4hp. UL 85°C, file E45221, CSA file LR10990



Inrush 36A to EN61058-1 & 20A 28Vdc



1350 series 16(4)A 250Vac T85 1E4 (10,000 Ops.)

On request 16(6)A 250Vac T125 5E4 (50,000 Ops.) & 150A Inrush to IEC 65



UL CSA 20A 250Vac 1hp, 125Vac 1/2hp
UL 72Vdc 7A, 36Vdc 14A. UL 85°C, file E45221, CSA file LR10990



20A 28Vdc

3mm contact gap except if marked μ . Technical data on pages 4 & 5 (switches), 66 (indicators)

C 1553 A L ---


TERMINAL FUNCTION ROCKER BODY PRINT, COLOUR, VOLTAGE ETC

TERMINAL	FUNCTION	ROCKER
<p>C</p> <p>6.3 x 0.8</p>	<p>Approvals & ratings vary with function On Off Switches - ON when pressed over terminal 1</p>	<p>A Softline Matt</p> <p>Lit (not momentary)</p>
<p>H</p> <p>4.8 x 0.8*</p>	<p>Standard 1550 \blacklozenge</p> <p>1551 HP rating N/A</p> <p>1552 HP rating N/A</p>	<p>B Splashproof (with Arcshield)</p> <p>Matt or gloss</p> <p>V Curved</p> <p>Gloss only</p> <p>Lit (not momentary)</p>
<p>K</p> <p>2.8 x 0.8*</p>	<p>1553 \blacklozenge Not W, X or B rocker</p> <p>1353 \blacklozenge Not W, X or B rocker</p>	<p>W Splashproof (with Arcshield)</p> <p>Lit (not momentary)</p> <p>P Lit window Matt</p> <p>Lit (not momentary)</p>
<p>T</p> <p>0.21</p> <p>Solder</p>	<p>1560 \blacklozenge μ</p> <p>1561 μ</p> <p>1562 μ In house tests only</p>	<p>X Two colour Matt</p> <p>(On Off only - not momentary)</p> <p>F Flat lens Gloss (0480 only)</p> <p>Top view</p>
<p>U</p> <p>0.21</p> <p>Right angle T Solder (Not DP)</p>	<p>1570 \blacklozenge μ 125V & 250V 1/2 HP H terminal rated T100 only</p> <p>1571 μ HP rating N/A H terminal rated T100 only</p> <p>1572 μ HP rating N/A H terminal rated T100 only</p>	<p>A Softline lens Matt (0480 only) as F but with raised profile</p>
<p>X</p> <p>4.0</p> <p>PCB 0.8Sq*</p>	<p>1484 μ In-house tested to 10(3)A 250Vac</p> <p>1487 μ In-house tested to 10(3)A 250Vac</p> <p>0480 X terminal N/A</p>	<p>Indicator Technical data on page 66</p>

*Contact factory for details on 1350 series



C1350AL ---



C1550XL ---



C1553PL ---



C0480AL ---









Optional snap-in M441 barrier



C1553AA with M616 guard
Cut-out 22.0/22.1 x 29.4/29.5
Guard accepts "A" body only


BODY

Panel cut-out * Flange
Cut-outs must be punched in the direction of insertion

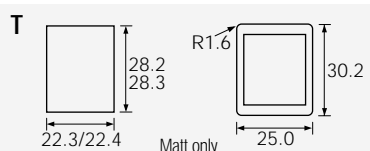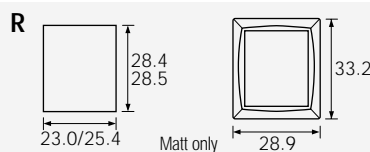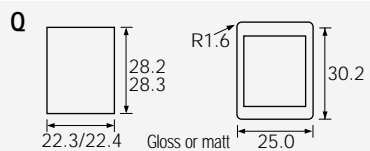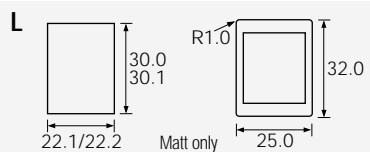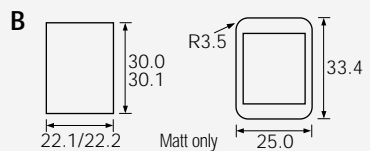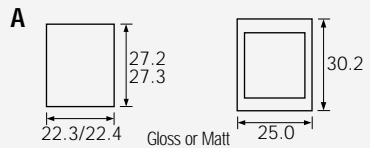

OPTIONS

- Finish** Matt is standard
- Colour** Call factory for custom colours. A full range is available for large orders
- Legend printing** Select from the examples or call factory for custom legends
- Lamp voltage** Call factory for details
- Blanking plates A0494** Dummy units to fill unused panel holes
- Protective cover** (designed to IP65) Snaps on to A, L, Q or T bodies (add G after body in cat no). This reduces panel thickness by 1mm.




Panel sealing washer W42 is available for the above body sizes but reduces panel thickness by a further 0.8mm. Covers are not suitable for momentary types.

Arcshield
Hides switching arc

For all options call the factory

DIMENSIONS (mm)



Terminal spacing - Poles 10.2 between centres


Panel thickness

- A,Q** 0.75 to 3.3mm
- L,B,T** 0.75 to 2.5mm
- R** 0.75 to 3.0mm

* For cut-out details on momentary switches call the factory

1350 High inrush, positive break switching

The 1350 series mechanism ensures contact welds formed at switch-on, are positively separated by the plunger tube acting directly on the step in the moving contact.



Examples of printing



EN602A



EN730



EN822

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Rocker Switches](#) category:

Click to view products by [Arcoelectric](#) manufacturer:

Other Similar products are found below :

[VKD2GHNB-00000-000](#) [VSD2GNNB-00000-000](#) [6-1571986-5](#) [6-1571986-9](#) [632422-4B-KD](#) [7036WWCDBX653+U622](#) [8055K52Z7V](#)
[8138K20E6M50](#) [FMC18A2200002](#) [84206L](#) [84312LX](#) [PREDD4-07F-BB0FW](#) [PREDD5-07F-BB0GW](#) [PRFDD1-16F-BB000](#) [PRFDD3-16F-](#)
[BB000](#) [1-1634201-0](#) [999-16702-001](#) [A101J2ZQ004](#) [A101J4ZQ004](#) [A101J51CB0004](#) [A107J51ZQ0004](#) [A201J1AQ004](#) [A201J1AV2Q004](#)
[A201J3ZB004](#) [A201J50ZQ004](#) [A203J51ZQ0004](#) [A226L11YZQ](#) [A22L11A](#) [A435S1YZQ](#) [H8500XBBBBL-A](#) [H8653VBBG2577W](#)
[HB130CHNWWNAAC](#) [1251.0303](#) [AE205J60V3B004](#) [RH110C2NBB](#) [1352.0107](#) [1363.0201](#) [AML25GBF2AA03GR](#) [1571099-3](#) [1571987-4](#)
[1571987-5](#) [1571989-7](#) [B123J77V7B2](#) [B226J50W4Q22P](#) [B433J37ZQ22M](#) [160212E](#) [1801.1164](#) [1831.1102](#) [1833.3402](#) [1837.1118](#)