

ARTESYN ATA SERIES

6 Watts



Advanced Energy's Artesyn ATA series 6 watt isolated DC-DC converters are suitable for a diverse range of low power applications, including data communication, telecommunication and computer peripheral equipment, industrial automation and mobile battery-powered systems. The series comprises 14 variants, each of which is available in a mini dual-in-line package for through-hole mounting.

DATA SHEET

Total Power:

6 W

Input Voltage:

12, 24 or 48 V

of Outputs:

Single and Dual

SPECIAL FEATURES

- Ultra compact DIP package
23.8 x 13.7 x 8.0 mm
(0.94 x 0.54 x 0.31 inches)
- Efficiency up to 86%
- I/O-isolation 1500 VDC
- Ultra-wide 4:1 input range
- Operating temperature range
-40 °C to +90 °C
- Input filter meets EN 55022, class A
and FCC, level A
- Three year product warranty
- UL/cUL/IEC/EN 62368-1 (60950-1)
safety approval and CE marking

SAFETY

- UL/cUL/IEC/EN 62368-1 (60950-1)
Safety Approval & CE Marking

ELECTRICAL SPECIFICATIONS

Input	
Input range	9 - 36 Vdc, 18 - 75 Vdc
Efficiency	86% @ 24 Vo
Output	
Voltage tolerance	±2.0%
Line regulation	0.8%
Load regulation	1.0%
Noise/ripple	55 mV
Overload protection	150% typ of Io max, Hiccup
Short circuit protection	Hiccup mode
Switching frequency	370 KHz
Isolation	
I/O isolation	I/O: 1500 Vdc
Insulation resistance	1000 Mohm
Insulation capacitance	500 pF


ENVIRONMENTAL SPECIFICATIONS

Operating ambient temperature range	-40 °C to +90 °C
Storage temperature	-50 °C to +125 °C
Humidity	5% to 95% non-condensing
MTBF	TBD Khrs calculated

ORDERING INFORMATION

Part Number	Input Voltage	Output Voltage	Output Current	Efficiency	Power
ATA01F18-L	9-36 Vdc	3.3 V	1200 mA	78%	4 W
ATA01A18-L	9-36 Vdc	5 V	1200 mA	82%	6 W
ATA01B18-L	9-36 Vdc	12 V	500 mA	85%	6 W
ATA01C18-L	9-36 Vdc	15 V	400 mA	85%	6 W
ATA01H18-L	9-36 Vdc	24 V	250 mA	86%	6 W
ATA01BB18-L	9-36 Vdc	±12 V	250 mA	85%	6 W
ATA01CC18-L	9-36 Vdc	±15 V	200 mA	86%	6 W
ATA01F36-L	18-75 Vdc	3.3 V	1200 mA	78%	4 W
ATA01A36-L	18-75 Vdc	5 V	1200 mA	82%	6 W
ATA01B36-L	18-75 Vdc	12 V	500 mA	85%	6 W
ATA01C36-L	18-75 Vdc	15 V	400 mA	85%	6 W
ATA01H36-L	18-75 Vdc	24 V	250 mA	86%	6 W
ATA01BB36-L	18-75 Vdc	± 12 V	250 mA	85%	6 W
ATA01CC36-L	18-75 Vdc	± 15 V	200 mA	86%	6 W

MECHANICAL DIMENSIONS

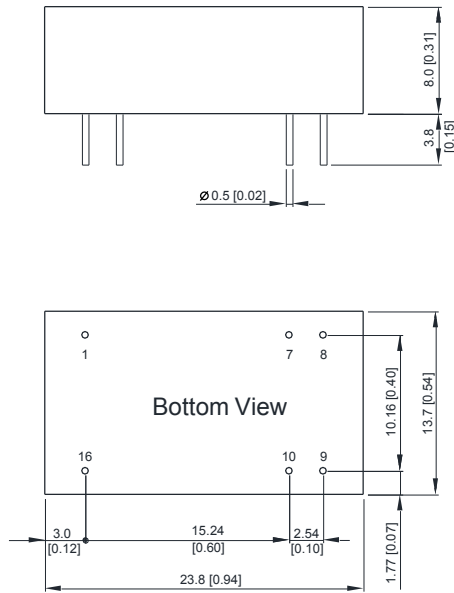

- All dimensions in mm (inches)
- Tolerance: X.X±0.25 (X.XX±0.01)
X.XX±0.13 (X.XXX±0.005)
- Pin pitch tolerance: ±0.25 (±0.01)
- Pin dimension tolerance: ±0.1 (±0.004)

PIN CONNECTORS

Pin No.	Single Output	Dual Output
1	-Vin	-Vin
7	No Connection	No Connection
8	No Connection	Common
9	+Vout	+Vout
10	-Vout	-Vout
16	+Vin	+Vin



For international contact information,
visit advancedenergy.com.

powersales@aei.com (Sales Support)
productsupport.ep@aei.com (Technical Support)
+1 888 412 7832

ABOUT ADVANCED ENERGY

Advanced Energy (AE) has devoted more than three decades to perfecting power for its global customers. AE designs and manufactures highly engineered, precision power conversion, measurement and control solutions for mission-critical applications and processes.

Our products enable customer innovation in complex applications for a wide range of industries including semiconductor equipment, industrial, manufacturing, telecommunications, data center computing, and medical. With deep applications know-how and responsive service and support across the globe, we build collaborative partnerships to meet rapid technological developments, propel growth for our customers, and innovate the future of power.

PRECISION | POWER | PERFORMANCE

Specifications are subject to change without notice. Not responsible for errors or omissions. ©2020 Advanced Energy Industries, Inc. All rights reserved. Advanced Energy®, AE® and Artesyn™ are U.S. trademarks of Advanced Energy Industries, Inc.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Isolated DC/DC Converters](#) category:

Click to view products by [Artesyn Embedded Technologies](#) manufacturer:

Other Similar products are found below :

[ESM6D044440C05AAQ](#) [FMD15.24G](#) [PSL486-7LR](#) [Q48T30020-NBB0](#) [JAHW100Y1](#) [SPB05C-12](#) [SQ24S15033-PS0S](#) [18952](#) [19-130041](#)
[CE-1003](#) [CE-1004](#) [GQ2541-7R](#) [RDS180245](#) [MAU228](#) [J80-0041NL](#) [DFC15U48D15](#) [XGS-0512](#) [XGS-1205](#) [XGS-1212](#) [XGS-2412](#) [XGS-](#)
[2415](#) [XKS-1215](#) [06322](#) [NCT1000N040R050B](#) [SPB05B-15](#) [SPB05C-15](#) [L-DA20](#) [DCG40-5G](#) [QME48T40033-PGB0](#) [XKS-2415](#) [XKS-2412](#)
[XKS-1212](#) [XKS-1205](#) [XKS-0515](#) [XKS-0505](#) [XGS-2405](#) [XGS-1215](#) [XGS-0515](#) [PS9Z-6RM4](#) [73-551-5038I](#) [AK1601-9RT](#) [VI-N61-CM](#) [VI-](#)
[R5022-EXWW](#) [PSC128-7iR](#) [RPS8-350ATX-XE](#) [DAS1004812](#) [PQA30-D24-S24-DH](#) [VI-M5F-CQ](#) [VI-LN2-EW](#) [VI-PJW01-CZY](#)